

# **UTK-6024**

## 23.8" Indoor Self-Service Kiosk



## **Features**

- Indoor self-service kiosk equipped with a 23.8" touchscreen
- Colorful eye-catching LED indicators ensure intuitive operation
- Multiple stands with RFID bin and tray for easy installation
- Modularized design allows for easy upgrades and function expansion
- Supports DeviceOn/iService software for remote device maintenance
- Compact and lightweight for convenient installation in space-limited environments
- Supports QR code scanner, NFC reader and receipt printers for most popular payment methods
- Supports Windows and Android operating systems




# DeviceOn/iService Introduction

Advantech UTK-6024 is an indoor self-service kiosk equipped with a 23.8" touchscreen, QR code scanner, NFC reader, and receipt printer, and can be flexibly configured for a wide range of self-service applications. Built for easy installation in environments with limited space the UTK-6024 kiosk supports most popular payment methods, making it the ideal mobile computing solution for rapid deployment at exhibitions, concerts, and tradeshows.

## **Specifications**

| SKU                             |                                    | ARM Cortex                                    | Intel® Pentium®          | 11 <sup>th</sup> Gen Intel <sup>®</sup> Core™      |  |
|---------------------------------|------------------------------------|-----------------------------------------------|--------------------------|----------------------------------------------------|--|
| Processor System                | Processor                          | Rockchip RK3399                               | Intel® Pentium® N4200E   | Intel® Core™ i3-1115G4E<br>Intel® Core™ i5-1145G7E |  |
|                                 | Memory                             | 2GB/4GB LPDDR3-1866 SDRAM                     | 8GB DDR3-1600 SDRAM      | 8GB DDR4-3200 SDRAM                                |  |
|                                 | Storage                            | 16GB/32GB eMMC                                | 128GB SATA3 TLC SSD      | 128GB SATA3 TLC SSD                                |  |
|                                 | Bluetooth                          | Bluetooth® 5.0                                | Bluetooth® 5.0           | Bluetooth® 5.2                                     |  |
|                                 | Network (WLAN)                     | IEEE 802.11 abgn + ac                         | IEEE 802.11 abgn + ac,ax | IEEE 802.11 abgn + ac,ax                           |  |
|                                 | Network (LAN)                      | 1 x 10/100/1000 Mbps                          | 2 x 10/100/1000 Mbps     | 2 x 10/100/1000 Mbps                               |  |
|                                 | Stereo Speaker                     | 3W x 2                                        | 3W x 2                   | 3W x 2                                             |  |
| Outlook                         | Dimensions (W x H x D)             | 347 x 279.66 x 824.65 mm                      |                          |                                                    |  |
|                                 | Weight                             | 23 kg                                         |                          |                                                    |  |
| LCD                             | Size/Type                          | 23.8" TFT LCD with WLED Backlight             |                          |                                                    |  |
|                                 | Brightness (cd/m2)                 | 350                                           |                          |                                                    |  |
|                                 | Resolution                         | 1920 x 1080 max.                              |                          |                                                    |  |
|                                 | Color                              | 16.7M                                         |                          |                                                    |  |
|                                 | Contrast                           | 1000:1                                        |                          |                                                    |  |
|                                 | View Angle                         | 178°/178°                                     |                          |                                                    |  |
| Touch Screen                    | Туре                               | Projected capacitive touch                    |                          |                                                    |  |
|                                 | Light Transmission                 | 80% ± 2%                                      |                          |                                                    |  |
|                                 | Controller                         | USB interface                                 |                          |                                                    |  |
| S Support                       | Operating System                   | Windows 10 64-bit                             |                          |                                                    |  |
| Environmental<br>Specifications | Operating Temperature              | 0 ~ 40 °C / 32 ~ 104 °F                       |                          |                                                    |  |
|                                 | Relative Humidity                  | 10 $\sim$ 95% @ 40 °C / 104 °F non-condensing |                          |                                                    |  |
|                                 | Certification                      | CE, FCC, CCC                                  |                          |                                                    |  |
| ower Supply                     | Power Supply                       |                                               | 100-240V 150W 24V W/PFC  |                                                    |  |
| Peripherals                     | Printer                            | 58mm/80mm Thermal Printer                     |                          |                                                    |  |
|                                 | Scanner                            | 2D QR Code Scanner                            |                          |                                                    |  |
|                                 | NFC (*Optional)                    | NFC Card Reader                               |                          |                                                    |  |
|                                 | Camera (*Optional)                 | 1080p Pixe CAM WDR Sensor                     |                          |                                                    |  |
|                                 | ADA (*Optional)                    | ADA Device                                    |                          |                                                    |  |
|                                 | LED Indicator (*Optional)          | LED Indicator Light                           |                          |                                                    |  |
|                                 | Dual Digital MIC (*Optional)       | Digital Microphone                            |                          |                                                    |  |
|                                 | Smart Card reader (*Optional)      | Smart card reader with USB connection         |                          |                                                    |  |
|                                 | Payment Module Bracket (*Optional) | Customized payment module bracket             |                          |                                                    |  |

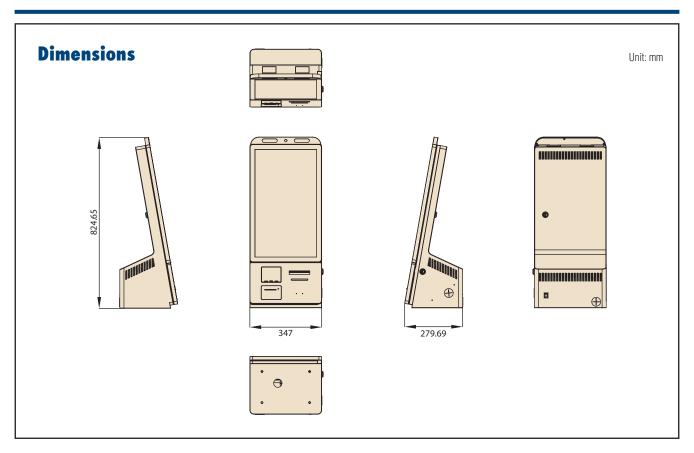

## **Order Information**


| Part Number     | Description                                                                                                                                                                            |  |  |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| UTK-6024-CA3W00 | All-in-one Indoor Kiosk, Rockchip RK3399, 4GB Memory,<br>32GB Storage, 23.8" 1080p 350 nits T/S, 58/80mm Thermal<br>Printer, WiFi 5 + BT 5.0, Scanner + NFC, Camera, Android           |  |  |
| UTK-6024-CA3W01 | All-in-one Indoor Kiosk, Rockchip RK3399, 2GB Memory,<br>16GB Storage, 23.8" 1080p 350 nits T/S, 58/80mm Thermal<br>Printer, WiFi 5 + BT 5.0, Scanner + NFC, Camera, Android           |  |  |
| UTK-6024-AN3W00 | All-in-one Indoor Kiosk, Intel® Pentium® N4200E, 8GB DDR3<br>SDRAM, 128GB SSD, 23.8" 1080p 350 nits T/S, 58/80mm<br>Thermal Printer, WiFi 5 + BT 5.0, Scanner + NFC, Camera,<br>Win10  |  |  |
| UTK-6024-TB3W00 | All-in-one Indoor Kiosk, Intel® Core™ i3-1115G4E, 8GB<br>DDR4 SDRAM, 128GB SSD, 23.8" 1080p 350 nits T/S,<br>58/80mm Thermal Printer, WiFi 6 + BT 5.2, Scanner + NFC,<br>Camera, Win10 |  |  |
| UTK-6024-TC3W00 | All-in-one Indoor Kiosk, Intel® Core™ i5-1145G7E, 8GB<br>DDR4 SDRAM, 128GB SSD, 23.8" 1080p 350 nits T/S,<br>58/80mm Thermal Printer, WiFi 6 + BT 5.2, Scanner + NFC,<br>Camera, Win10 |  |  |
| UTK-6024-TD3W00 | All-in-one Indoor Kiosk, Intel® Core™ i7-1185G7E, 8GB<br>DDR4 SDRAM, 128GB SSD, 23.8" 1080p 350 nits T/S,<br>58/80mm Thermal Printer, WiFi 6 + BT 5.2, Scanner + NFC,<br>Camera, Win10 |  |  |
| UTK-6024-AN3W0B | Barebone Indoor Kiosk, Intel® Pentium® N4200E, 23.8" 1080p 350 nits T/S, 58/80mm Thermal Printer, Scanner + NFC                                                                        |  |  |
| UTK-6024-TB3W0B | Barebone Indoor Kiosk, Intel® Core™ i3-1115G4E, 23.8"<br>1080p 350 nits T/S, 58/80mm Thermal Printer, Scanner +<br>NFC                                                                 |  |  |
| UTK-6024-TC3W0B | Barebone Indoor Kiosk, Intel® Core™ i5-1145G7E, 23.8"<br>1080p 350 nits T/S, 58/80mm Thermal Printer, Scanner +<br>NFC                                                                 |  |  |
| UTK-6024-TD3W0B | Barebone Indoor Kiosk, Intel® Core™ i7-1185G7E, 23.8"<br>1080p 350 nits T/S, 58/80mm Thermal Printer, Scanner +<br>NFC                                                                 |  |  |

## Accessories

| Part Number   | Description                             |                     |  |
|---------------|-----------------------------------------|---------------------|--|
| 1702002600    | Power Cord UL 3P 10A 125V 183cm         |                     |  |
| 1702002605    | Power Cord EU 3P 10A 250V 183cm         |                     |  |
| 1700008972    | Power Cord CCC 2P 2.5A 250V 183cm       |                     |  |
| 1700013977    | Power cable, CCC, 3P, 10A, 250V, 200 cm |                     |  |
| UTK-0PAC-0001 | Stand for bundling with UTI             | K-6024 Kiosk  After |  |
|               | Tray for bundling with stand            |                     |  |
| UTK-0PAC-0002 | ~                                       |                     |  |
|               | Before                                  | After               |  |
|               | RFID bin for bundling with stand        |                     |  |
| UTK-OPAC-0003 |                                         |                     |  |
|               | Before                                  | After               |  |

# DeviceOn/iService

# **Unified Remote Device Management Software**

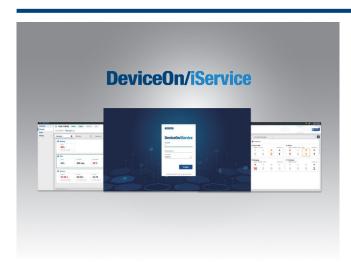

## **Features**

- Supports Advantech devices equipped with Windows, Android, and Linux OS
- Flexible device, location, user, and permission management
- Enables remote monitoring and control of hardware, software, and peripherals
- Supports over-the-air (OTA) firmware and software updates
- Ensures quick, easy, and secure device onboarding
- RESTful APIs for third-party system integration

## Introduction

Advantech's DeviceOn/iService is a next-generation unified device management solution based on the WISE-DeviceOn platform. Designed to enable centralized monitoring and remote management, DeviceOn/iService supports Advantech devices equipped with Windows, Linux, or Android operating systems. The software also supports the management of applications and integrated peripherals, such as a barcode scanner, card reader, camera, and printer. Users can remotely access and control connected devices, take screenshots, rollout OTA upgrades, and use remote desktop capabilities for troubleshooting from any location at any time. Moreover, DeviceOn/iService supports batch operations to facilitate the management of multiple devices simultaneously for easy and convenient device configuration and deployment.

## **Total Management**



### **Devices & Hardware**

- Windows, Linux, Android
- Hardware, storage, battery

## Real-Time Monitoring

Remote Access

- Connection/hardware status
- Software/peripheral status
- Failure notifications

# OTA U

### **OTA updates**

**Operational Efficiency** 

- System/software updates
- File repository management
- App store



## **Software & Peripherals**

- Software monitoring & access
- Screens, USB devices, printers



## **Remote Controls**

- Power controls
- Audio, backlight controls
- Software controls



### **Batch Controls**

- 1-to-many batch reboot, etc.
- Time-saving tasks



### **Open for Expansion**

- Peripheral integration
- Open APIs for integration



### **Troubleshooting**

- Screenshots
- Remote desktop support



## Setup Booster

- Software/peripheral watchlist
- Roles, rule templates

Note: Some functions may vary according to the product

## **System Architecture**



