

Technical Specifications

UniStream® HMI Panel

**USP-070-B08, USP-070-C08, USP-070-B10,
USP-070-C10, USP-104-B10, USP-104-C10,
USP-104-M10, USP-156-B10, USP-156-C10**

UniStream® HMI Panels provide the foundation of an all-in-one PLC + HMI controller. To create an all-in-one device, snap a UniStream® CPU-for-Panel and one or more Uni-I/O™ or Uni-COM™ modules onto the back of the panel.

UniStream connects directly to UniCloud, Unitronics' IIoT cloud platform using built-in UniCloud connectivity. Model number ending with **Cxx** provided with built-in 5 years UniCloud start-up subscription with no additional payment required for this period. More information about UniCloud is available at www.unitronics.cloud.

Installation Guides are available in the Unitronics Technical Library at www.unitronicsplc.com.

| Power Supply | USP-070-x08 | USP-070-x10 | USP-104-x10 | USP-104-x10 | USP-156-x10 |
|--------------------------|-----------------------------|----------------------------|-----------------------------|-------------|----------------------------|
| Input voltage | 12VDC or 24VDC | | | | |
| Permissible range | 10.2VDC to 28.8VDC | | | | |
| Max. current consumption | 1.35A@12VDC, 0.65A@24VDC | 1.5A@12VDC, 0.75A@24VDC | 1.62A@12VDC, 0.81A@24VDC | | 2.5A@12VDC, 1.25A@24VDC |

| Display | USP-070-x08 | USP-070-x10 | USP-104-x10 | USP-104-M10 | USP-156-x10 |
|-------------------------------------|-------------------------------------|---------------------|---------------------|---|------------------|
| LCD type | TFT | | | | |
| Backlight type | White LED | | | | |
| Luminous intensity (brightness) | Typically 400 nits (cd/m2), at 25°C | | | | |
| Backlight longevity ⁽¹⁾ | 30k hours | 50k hours | | | |
| Resolution (pixels) | 800 x 480 (WVGA) | 800 x 480 (WVGA) | 800 x 600 (SVGA) | | 1366 x 768 |
| Size | 7" | 7" | 10.4" | | 15.6" |
| Viewing area Height x Width (mm) | 154.08 x 85.92 | 152.4 x 91.44 | 211.2 x 158.4 | | 344.23 x 193.53 |
| Color support | 65,536 (16bit) | | | | 16M (24bit) |
| Surface treatment | Anti-glare | | | | |
| Touch screen | Resistive Analog | | | Capacitive multi-touch, 5-fingers | Resistive Analog |
| Actuation force (min) | > 80 g (0.176 lb) | | | | |

| System | |
|-----------------|--|
| Processor | 32 bit, 800MHz RISC Processor, with Graphic Accelerator |
| Internal memory | RAM: 512 MB ROM: 3GB system memory 1GB user memory |
| External memory | microSD or microSDHC card Size: up to 32GB, Data Speed: up to 200Mbps |

| Audio ⁽²⁾ | |
|-----------------------------|--|
| Bit Rate | 192kbps |
| Internal speaker | Audio compatibility: mono MP3 files. Frequency range: 500Hz to 20KHz |
| External audio | Audio compatibility: stereo MP3 files. Interface: 3.5mm Audio-out jack - use shielded audio cable of up to 3 m (9.84 ft). Impedance: 32Ω No isolation |

| Video | |
|-----------------|---------------------------|
| Support Formats | MPEG-4 Visual , AVC/H.264 |

| Communication | |
|----------------------------------|--|
| Ethernet port | |
| Number of ports | 2 |
| Port type | 10/100 Base-T (RJ45) |
| Auto crossover | Yes |
| Auto negotiation | Yes |
| Isolation voltage | 500VAC for 1 minute |
| Cable | Shielded CAT5e cable, up to 100 m (328 ft) |
| USB device ⁽³⁾ | |
| Number of ports | 1 |
| Port type | Mini-B |
| Data rate | USB 2.0 (480Mbps) |
| Isolation | None |
| Cable | USB 2.0 compliant; < 3 m (9.84 ft) |
| USB host | |
| Number of ports | 2 |
| Port type | Type A |
| Data rate | USB 2.0 (480Mbps) |

| | |
|-------------------------|------------------------------------|
| Isolation | None |
| Cable | USB 2.0 compliant; < 3 m (9.84 ft) |
| Over current protection | Yes |


| On-board I/O or COM modules ⁽⁴⁾ | USP-070-x08, USP-070-x10 | USP-104-x10, USP-104-M10 USP-156-x10 |
|---|---------------------------------|---|
| Number of modules | Up to 3 | Up to 5 (up to 4 of them can be COM modules) |

Note that the numbers above relate to Uni-I/O and Uni-COM modules. You can mix Uni-I/O and Uni-COM modules with Uni-I/O Wide modules, considering that 1 Uni-I/O Wide module equals 1½ Uni-I/O module. For example, the USP-104-x10 and USP-104-M10 back panel can host 2 Uni-I/O and 2 Uni-I/O Wide modules in any order.


| Environmental | | |
|------------------------|--|-------------------------------|
| Protection | Front face ⁽²⁾ : IP65/IP66, NEMA 4X Rear side: IP20, NEMA1 | |
| | USP-070-x08, USP-070-x10, USP-104-x10, USP-104-M10 | USP-156-x10 |
| Operating temperature | -20°C to 55°C (-4°F to 131°F) | 0°C to 50°C (32°F to 122°F) |
| Storage temperature | -30°C to 70°C (-22°F to 158°F) | -20°C to 60°C (-4°F to 140°F) |
| Relative Humidity (RH) | 5% to 95% (non-condensing) | |
| Operating Altitude | 2,000 m (6,562 ft) | |
| Shock | IEC 60068-2-27, 15G, 11ms duration | |
| Vibration | IEC 60068-2-6, 5Hz to 8.4Hz, 3.5mm constant amplitude, 8.4Hz to 150Hz, 1G acceleration | |

| Dimensions | USP-070-x08 | USP-070-x10 | USP-104-x10 | USP-104-M10 | USP-156-x10 |
|-------------------|---------------------------|--------------------|--------------------|--------------------|--------------------|
| Weight | 0.7 Kg (1.54 lb) | 0.7 Kg (1.54 lb) | 1.45 Kg (3.20 lb) | 1.45 Kg (3.20 lb) | 3 Kg (3.60 lb) |
| Size | Refer to the images below | | | | |


USP-070-x08 , USP-070-x10 7" Panel

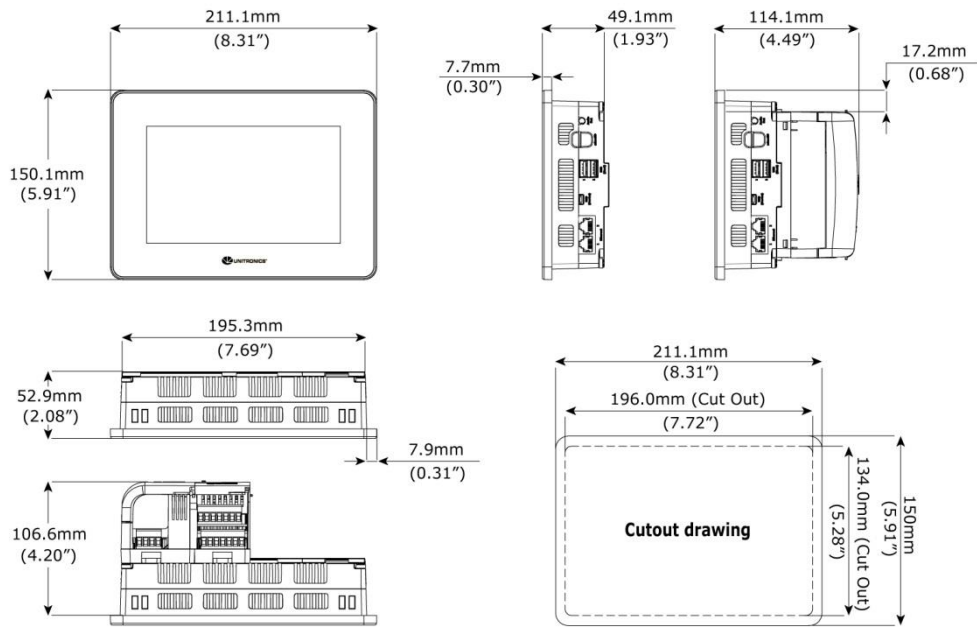

USP-104-x10, USP-104-M10 10.4" Panel

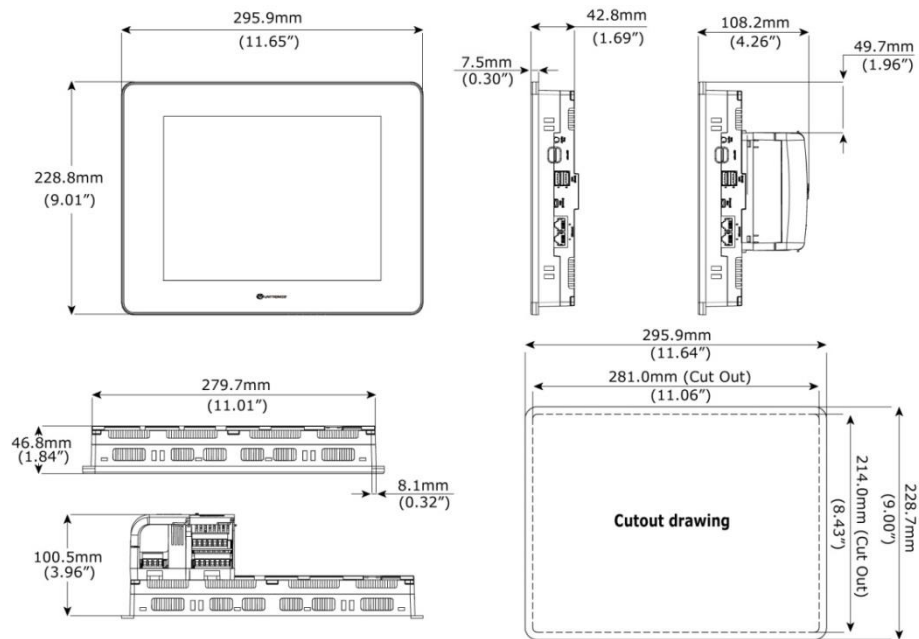

USP-156-x10 15.6" Panel

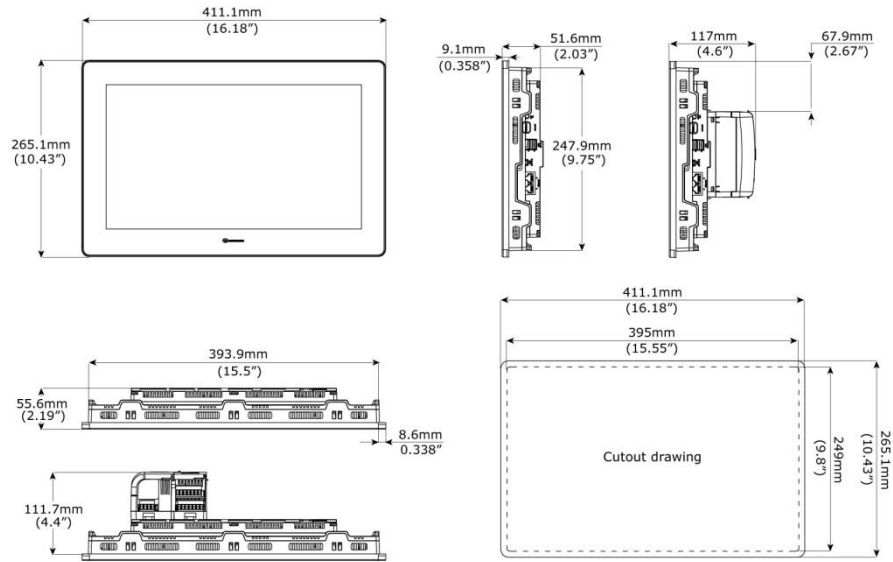**Notes:**

1. Panel's longevity is the typical operating time after which the brightness drops to 50% of its original level.
2. The audio outlet seal must be inserted in the outlet in order to comply with IP66 or NEMA 4X.
3. The USB device port is used to connect the device to a PC.
4. The panel back is molded into a DIN rail-like structure which provides the physical support for a UniStream® CPU-for-Panel, Uni-I/O™ modules and Uni-Com™ modules. Details are provided in the UniStream® HMI Panel installation guides.

The information in this document reflects products at the date of printing. Unitronics reserves the right, subject to all applicable laws, at any time, at its sole discretion, and without notice, to discontinue or change the features, designs, materials and other specifications of its products, and to either permanently or temporarily withdraw any of the forgoing from the market.

All information in this document is provided "as is" without warranty of any kind, either expressed or implied, including but not limited to any implied warranties of merchantability, fitness for a particular purpose, or non-infringement. Unitronics assumes no responsibility for errors or omissions in the information presented in this document. In no event shall Unitronics be liable for any special, incidental, indirect or consequential damages of any kind, or any damages whatsoever arising out of or in connection with the use or performance of this information.

The tradenames, trademarks, logos and service marks presented in this document, including their design, are the property of Unitronics (1989) (R"G) Ltd. or other third parties and you are not permitted to use them without the prior written consent of Unitronics or such third party as may own them.

DOC21003-A8 REV. A03 12/20