

MT4523TE

FEATURES


- 10.4" 16:9 TFT Display
- 65536 True Color TFT LCD
- 32-bit, 520 MHz RISC CPU
- 128 MB FLASH + 64 MB SDRAM
- 256 KB Recipe Memory, Record Data Easily
- Real-Time Clock, 2 Year Reserve Time when Powered Off
- 3 COM Ports, Supports Simultaneous Communication; RS232/RS422/RS485
- Input Voltage Range 21~28VDC



DESCRIPTION

The MT4000 Series is a very powerful HMI product that will make your application soar. This HMI line comes with a 65536 color display mode that gives your touch screen rich color and incomparable resolution. With the application of a powerful 520 MHz 32-bit RISC processor, the MT4000 provides faster processing speeds. Each HMI supports simultaneous communications via its multiple serial ports, so that you may connect to different controllers at the same time. With the simple, convenient and powerful EV5000 configuration software, the user can master its design method and create first-class programs efficiently.

DIMENSIONS

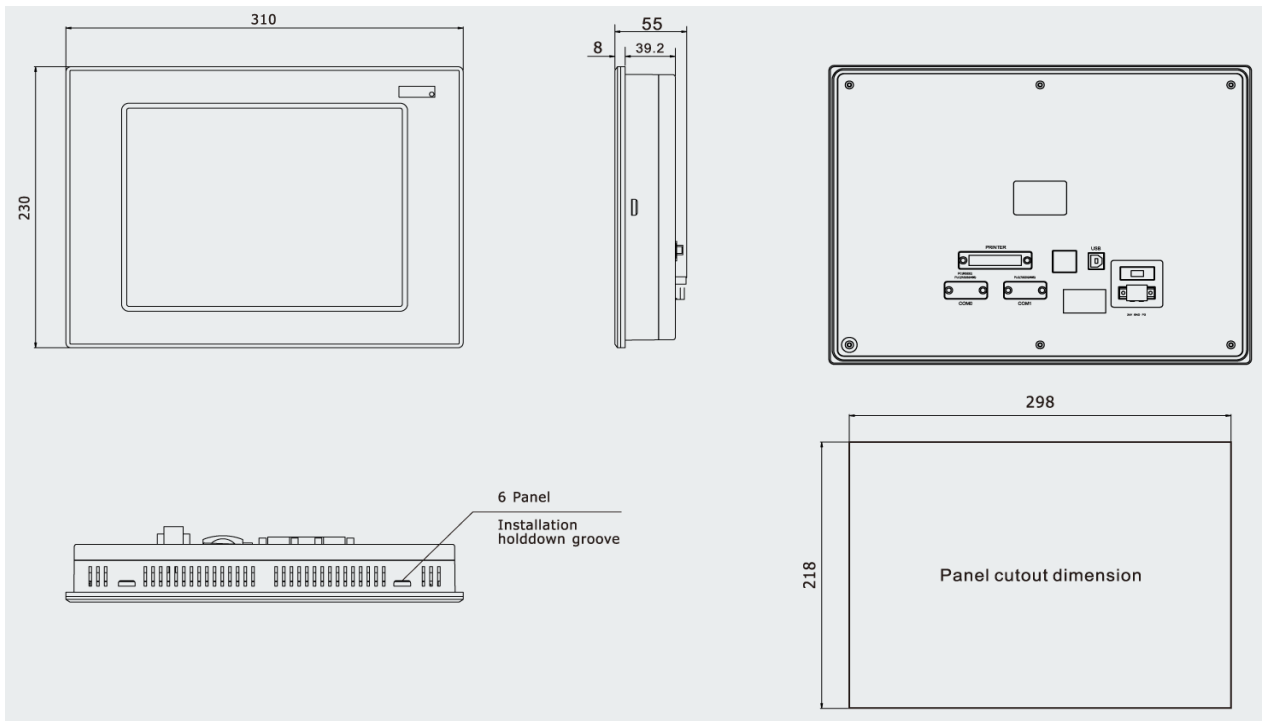

L011294

Performance Specifications	
Display	10.4" 16:9 TFT
Resolution	800 x 600 Pixels
Color	65,536 Colors
Backlight	LED
Brightness	300 cd/m ²
Backlight Life	50,000 Hrs
Touch Panel	4-Wire Precision Resistance Network
Processor	32-bit RISC CPU 520 MHz
Memory	128 MB FLASH, 64 MB SDRAM
Expandable Memory	1 USB Host, 1 SD Card
Recipe Memory & RTC	256 KB & RTC
Printer Port	USB/Serial Port
Ethernet	10/100 Base-T
Program Download	USB Slave/Serial Port/Ethernet Port
COM Port	COM0: RS232/RS485-2/RS485-4, COM1: RS232/RS485-2/RS485-4, COM0: RS232
Electrical Specifications	
Rated Power	12 W
Rated Voltage	24 VDC
Input Range	21~28 VDC
Power Down Allowed	< 5 ms
Insulation Resistance	> 50M Ω @ 500 VDC
Dielectric Strength Test	500 VAC 1 Minute
Structure Specifications	
Shell Color	Black
Shell Material	ABS
Dimensions(mm)	310 x 230 x 55
Cutout Size(mm)	298 x 218
Weight	2 Kg
Environment Specifications	
Operating Temperature	0°~50° C
Operating Humidity	10~90% Non-Condensing
Storage Temperature	-10°~60° C
Storage Humidity	10~90% Non-Condensing
Shockproof Test	10~25 Hz (X,Y,Z Direction, 2G, 30 Minutes)
Cooling Method	Natural Air Cooling
Certifications	
Degree of Protection	IP65 (Front Panel)
CE Certification	Comply with EN61000-6-2:2005 and EN61000-6-4:2007 Standards
FCC Compatibility	Complies with FCC Class A