



SETRON PAC4200; LCD; 96X96MM POWER MONITORING DEVICE PANEL MOUNT TYPE FOR MEASUREMENT OF ELECTR. VALUES VAUX: 110-340VDC / 95-240VAC VIN: MAX.690/400V; 45-65HZ AMPIN: X/1A OR X/5A AC COMPRESSION TYPE TERMINALS

Model		
product brand name		SETRON
Product designation		multimeter
Design of the product		compact
Product type designation		PAC4200
Type of measured value detection		complete
Design of the power supply		Wide-range power supply
General technical data		
Cutout width	mm	92
Cutout height	mm	92
Size of Power Monitoring Device / company-specific		size 96
Operating mode for measured value detection		
• automatic line frequency detection		Yes
• set at 50 Hz		No
• set to 60 Hz		No
Pulse duration		
• initial value	ms	30
• Full-scale value	ms	500

Voltage curve		Sinusoidal or distorted
Measurable line frequency / initial value	Hz	45
Measurable line frequency / Full-scale value	Hz	65
Measuring procedure / for voltage measurement		TRMS
MTBF	y	169.7
Equipment marking / acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750		P

<b>Voltage</b>		
Measurable current / 1 / at AC / Rated value	A	1
Measuring procedure / for current measurement		TRMS

<b>Supply voltage</b>		
Supply voltage frequency / Rated value		
• minimum	Hz	45
• maximum	Hz	65
Type of voltage / of the supply voltage		AC/DC
Measuring category / for supply voltage		CATIII
Apparent power consumption		
• with expansion module / maximum	V·A	32
• without expansion module / typical	V·A	11
Active power consumption		
• with expansion module / typical	W	11
• without expansion module / typical	W	5.5
Relative symmetrical tolerance / of the supply voltage	%	10

<b>Protection class</b>		
Protection class IP		
• on the front		IP65
• Rear side		IP20
Operating resource protection class / when installed		II

<b>Electricity</b>		
Short-time current resistance (I <sub>cw</sub> ) / limited to 1 s / Rated value	A	100
Measurable current / 2 / at AC / Rated value	A	5

<b>Suitability</b>		
Suitability for operation		Installation in stationary control panels in closed rooms
Adjustable time period / minimum	ms	10

<b>Product function</b>		
Product function		
• Illuminance of display backlighting adjustable		Yes
• Time-controlled reduction of the illuminance of display backlighting possible		Yes

- reactive power measurement
- frequency measurement
- pulse measurement
- Display contrast adjustable
- voltage measurement
- Current measurement
- active power measurement

Yes  
Yes  
Yes  
Yes  
Yes  
Yes  
Yes

## Display and operation

<b>Design of the display</b>		LCD, graphical, monochrome
<b>Number of keys</b>		4
<b>Color / of the background of the display</b>		white
<b>National language / on the display screen / is supported</b>		ger, en, fr, spa, ita, por, tur, rus, chi, pol
<b>Product function / Display can be inverted (positive &lt;=&gt; negative mode)</b>		Yes
<b>Horizontal image resolution</b>		128
<b>Vertical screen resolution</b>		96

## Communication

<b>Refresh time / at the interface</b>		
<ul style="list-style-type: none"> <li>• for instantaneous values / typical</li> </ul>	ms	200
<b>Number of active connections / at the Ethernet interface</b>		3
<b>Number of logical ports / at the Ethernet interface / is supported</b>		2
<b>Design of cable / connectable / Twisted pair</b>		Yes
<b>Product function / at the Ethernet interface</b>		
<ul style="list-style-type: none"> <li>• auto-MDI(X)</li> <li>• Autonegotiation</li> <li>• serial gateway</li> </ul>		Yes Yes Yes
<b>Protocol</b>		
<ul style="list-style-type: none"> <li>• at the Ethernet interface / is supported</li> <li>• is supported</li> </ul>		MODBUS TCP MODBUS TCP
<b>Transfer rate</b>		
<ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> <li>• 1 / for Ethernet</li> <li>• 2 / for Ethernet</li> </ul>	kbit/s kbit/s Mbit/s Mbit/s	10 000 100 000 10 100

## Fault limits

<b>Reference condition / for metering accuracy</b>		Acc. to IEC61557-12
<b>Formula for relative total measurement inaccuracy</b>		
<ul style="list-style-type: none"> <li>• for measured variable reactive energy</li> </ul>		Class 2 according to IEC61557-12 and/or IEC62053-23

- for measured variable output
- for measured variable output factor
- for measured variable voltage
- for measured variable current
- for measured variable THD
- for measured variable active energy

+/- 0,5 %  
 +/- 2 %  
 +/- 0,2 %  
 +/- 0,2 %  
 +/- 2 %  
 Class 0.2 according to IEC61557-12 and/or class  
 0.2S according to IEC62053-22

## Inputs Outputs

<b>Input voltage / at digital input</b>		
• initial value for signal<1>-recognition	V	19
• at DC / Rated value	V	24
• at DC / maximum	V	30
• Full-scale value for signal<0> recognition	V	10
<b>Number of digital outputs</b>		2
<b>Number of digital inputs</b>		2
<b>Digital output version</b>		switching or pulse output function
<b>Type of switching output</b>		solid state
<b>Type of electrical connection / at the digital outputs</b>		screw-type terminals
<b>Type of electrical connection / at the digital inputs</b>		screw-type terminals
<b>Input current / at digital input</b>		
• for signal <1>	mA	4
<b>Output current</b>		
• at digital output / with signal <0> / maximum	mA	0.2
• at digital output / for signal <1> / maximum	mA	27
• at digital output / for signal <1> / minimum	mA	10
• at the digital outputs / at DC / limited to 100 ms / maximum	mA	300
• at the digital outputs / at DC / maximum	mA	100
<b>Output delay / at digital output</b>		
• for signal <0> to <1> / maximum	ms	5
• for signal <1> to <0> / maximum	ms	5
<b>Operating conditions for digital inputs / external voltage supply</b>		Yes
<b>Operating voltage / as output voltage / at DC / maximum permissible</b>	V	30
<b>Property of the output / Short-circuit proof</b>		Yes
<b>Input delay time / at digital input</b>		
• for signal <0> to <1> / maximum	ms	5
• for signal <1> to <0> / maximum	ms	5
<b>Internal resistance / at the digital outputs</b>	Ω	55
<b>Measuring category / for digital signals</b>		CAT I
<b>Switching frequency / at digital output / maximum</b>	Hz	20

Transfer rate / 1 / for fast Ethernet	Mbit/s	100
---------------------------------------	--------	-----

## Measuring inputs

Outer conductors and neutral conductors internal resistance / for voltage measurement	MΩ	1.05
Measurable supply voltage		
• between (PE)N and L / at AC / minimum	V	11.5
• between (PE)N and L / at AC / maximum	V	480
• between (PE)N and L / at AC / maximum rated value	V	400
• between the outer conductors / at AC / minimum	V	20
• between the outer conductors / at AC / maximum	V	828
• between the outer conductors / at AC / maximum rated value	V	690
Voltage measuring range extension / with external voltage transformers		Yes
Measuring category / for voltage measurement		CATIII
Supply voltage / between the outer conductors / at AC / maximum permissible	V	831
Continuous current / at AC / maximum permissible	A	10
Current measuring range extension / with external current transformers		Yes
Measuring category / for current measurement		CATIII
Zero-point suppression / for current measurement		0 ... 10 %
Relative measurable current / at AC		
• minimum	%	1
• maximum	%	120
Apparent power consumption / for current measurement		
• with measuring range 1 A / per phase	mVA	4
• with measuring range 5 A / per phase	mVA	115

## Connections

<ul style="list-style-type: none"> <li>Type of connectable conductor cross-section / at the digital inputs <ul style="list-style-type: none"> <li>— for AWG conductors / solid</li> <li>— solid</li> <li>— finely stranded / with core end processing</li> </ul> </li> <li>Type of connectable conductor cross-section / at the digital outputs <ul style="list-style-type: none"> <li>— for AWG conductors / solid</li> <li>— solid</li> <li>— finely stranded / with core end processing</li> </ul> </li> </ul>		1x 24 ... 12 1x (0.2 ... 2.5 mm <sup>2</sup> ), 2x (0.2 ... 1.0 mm <sup>2</sup> ) 1x (0.25 ... 2.5 mm <sup>2</sup> ), 2x (0.25 ... 1.0 mm <sup>2</sup> )  1x 24 ... 12 1x (0.2 ... 2.5 mm <sup>2</sup> ), 2x (0.2 ... 1.0 mm <sup>2</sup> ) 1x (0.25 ... 2.5 mm <sup>2</sup> ), 2x (0.25 ... 1.0 mm <sup>2</sup> )
---	--	--

<ul style="list-style-type: none"> <li>• Type of connectable conductor cross-section / at the inputs for supply voltage <ul style="list-style-type: none"> <li>— for AWG conductors / solid</li> <li>— solid</li> <li>— finely stranded / with core end processing</li> </ul> </li> <li>• Type of connectable conductor cross-section <ul style="list-style-type: none"> <li>— at the measurement inputs for voltage <ul style="list-style-type: none"> <li>— for AWG conductors / solid</li> <li>— solid</li> <li>— finely stranded / with core end processing</li> </ul> </li> <li>— at the measurement inputs for current <ul style="list-style-type: none"> <li>— for AWG conductors / solid</li> <li>— solid</li> <li>— finely stranded / with core end processing</li> </ul> </li> </ul> </li> </ul>		2x 20 to 14 1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2 (0.5 ... 1.5 mm <sup>2</sup> )
<b>Type of electrical connection</b> <ul style="list-style-type: none"> <li>• at the inputs for supply voltage</li> <li>• at the measurement inputs for voltage</li> <li>• at the measurement inputs for current</li> <li>• of the fast Ethernet interface</li> </ul>		screw-type terminals screw-type terminals screw-type terminals RJ45 (8P8C)


Mechanical Design		
<b>Height</b>	mm	96
Height / of the display	mm	54
<b>Width</b>	mm	96
<b>Width</b> <ul style="list-style-type: none"> <li>• of the display</li> </ul>	mm	72
<b>Depth</b>	mm	82
<b>mounting position</b>		vertical
<b>Installation depth</b>	mm	77
<b>Installation depth / with expansion module / maximum</b>	mm	99
Mounting type / panel mounting		Yes
<b>Material thickness / of the control panel</b> <ul style="list-style-type: none"> <li>• maximum</li> </ul>	mm	4


Environmental conditions		
<b>Degree of pollution</b>		2
<b>Installation altitude / at height above sea level / maximum</b>	m	2 000
<b>Standard</b> <ul style="list-style-type: none"> <li>• for EMC for industrial sector</li> <li>• for EMC against unloading</li> </ul>		IEC 61000-6-2 IEC 61000-4-2

<ul style="list-style-type: none"> <li>• for EMC against high frequency fields</li> <li>• for EMC against conducted LF disturbance variables (industry)</li> <li>• for EMC against conducted disturbance variables via HF fields</li> <li>• for EMC against magnetic fields with power engineering frequencies</li> <li>• for EMC against quick, transient electrical disturbances</li> <li>• for EMC against voltage drops and interruptions</li> <li>• for EMC against surge voltages</li> <li>• for free fall</li> <li>• for pulse emitter</li> <li>• for cyclic, environmental damp heat check</li> <li>• for environmental coldness check</li> <li>• for environmental dry heat check</li> </ul>		IEC 61000-4-3 IEC 61000-6-4  IEC 61000-4-6  IEC 61000-4-8  IEC 61000-4-4  IEC 61000-4-11  IEC 61000-4-5 IEC 60068-2-32 according to IEC62053-31 IEC 60068-2-30 IEC 60068-2-1 IEC 60068-2-2
<b>Relative humidity / at 25 °C / without condensation / during operation</b>		
<ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>	% %	5 95
<b>Ambient temperature</b>		
<ul style="list-style-type: none"> <li>• during operation / minimum</li> <li>• during operation / maximum</li> <li>• during storage / minimum</li> <li>• during storage / maximum</li> </ul>	°C °C °C °C	-10 55 -25 70

## Certificates

<b>Certificate of suitability</b>		
<ul style="list-style-type: none"> <li>• as EC declaration of conformity</li> <li>• as approval for Canada</li> <li>• as approval for USA</li> <li>• Approval Australia</li> <li>• Approval Russia</li> </ul>		IEC 61010-1: 2001 (2nd Ed.) with Corr. 1, EN 61010-1: 2001 (2nd Ed.) and DIN EN 61010-1:2002 with "Berichtigung 1" UL 61010-1, 2nd Ed. CAN/CSA-C22.2 NO. 61010-1-04 UL 61010-1, 2nd Ed. CAN/CSA-C22.2 NO. 61010-1-04 Yes Yes
Equipment marking / acc. to DIN EN 61346-2		P

General Product Approval		Declaration of Conformity	other	
<b>CB</b>		<b>EAC</b>	<b>CE</b>	<a href="#">sonstig</a> <a href="#">Bestätigungen</a>
CB	UL		EG-Konf.	

other	
	<a href="#">PROFINET-Zertifizierung</a>
Profibus	

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/7KM42120BA003AA0>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/7KM42120BA003AA0/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=7KM42120BA003AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM42120BA003AA0)

### CAX-Online-Generator


<http://www.siemens.com/cax>

### Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

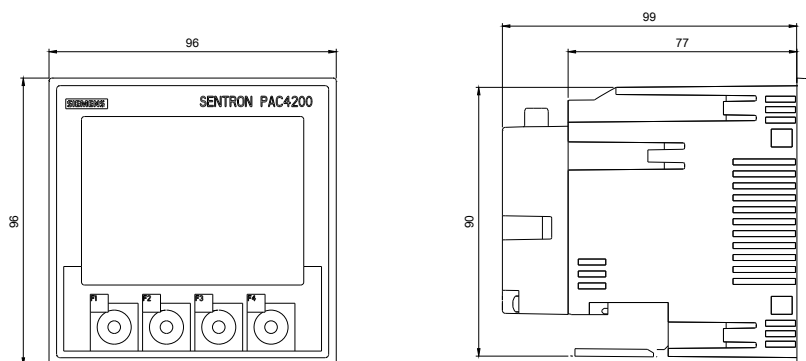



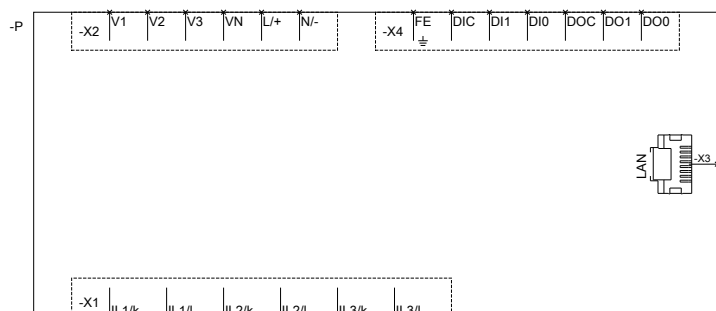

## **FIGURE 1: SIGNIFICANTLY SMALLER SIGN**

### REPORTING OF INFLUENCE VALUES