



SETRON PAC3200;  
LCD;  
96X96MM POWER MONITORING DEVICE PANEL MOUNT  
TYPE FOR MEASUREMENT OF ELECTR. VALUES VAUX:  
110-340VDC / 95-240VAC VIN: MAX.690/400V;  
45-65HZ AMPIN: X/1A OR X/5A AC COMPRESSION TYPE  
TERMINALS

Similar to image

General technical data:		
product designation		multimeter
product brand name		SETRON
Product-type designation		PAC3200
Size of multimeter / company-specific		size 96
Design of the product		basic
Product function		
• voltage measurement		Yes
• current measurement		Yes
• active power measurement		Yes
• reactive power measurement		Yes
• pulse measurement		Yes
• frequency measurement		Yes
Mean time between failures (MTBF)	a	185.8
Item designation		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		P
• according to DIN EN 61346-2		P
Measurement:		

<b>Measuring method</b>		
• for voltage measurement		RMS
• for current measurement		TRMS
<b>Type of measured value detection</b>		complete
<b>Curve form of the voltage</b>		Sinusoidal or distorted
<b>Measurable line frequency</b>	Hz	45 ... 65
<b>Operating mode for measured value detection</b>		
• automatic line frequency detection		Yes
• set at 50 Hz		No
• set to 60 Hz		No

#### Measuring inputs for voltage:

<b>Measurable supply voltage</b>		
• between (PE)N and L / for AC / maximum nominal value	V	400
• between the outer conductors / for AC / maximum nominal value	V	690
• between (PE)N and L / for AC	V	40 ... 480
• between the outer conductors / for AC	V	70 ... 831
<b>Supply voltage / between the outer conductors / for AC</b>		
• maximum permissible	V	831
<b>Measuring category / for voltage measurement</b>		CATIII
<b>Outer conductors and neutral conductors internal resistance</b>		
• for voltage measurement	MΩ	1.05
<b>Power consumption / for voltage measurement</b>		
• per phase	mW	220
<b>Measuring range extension for voltages</b>		
• with external voltage transformers		Yes

#### Measuring inputs for current:

<b>Measurable current</b>		
• 1 / for AC / nominal value	A	1
• 2 / for AC / nominal value	A	5
<b>Relative measurable current / for AC</b>	%	1 ... 120
<b>Continuous current / for AC / maximum permissible</b>	A	10
<b>Short-time current resistance (I<sub>cw</sub>) / limited to 1 s / rated value</b>	A	100
<b>Zero-point suppression / for current measurement</b>		0,1 ... 10 %
<b>Measuring category / for current measurement</b>		CATIII
<b>Measuring range extension for currents</b>		
• with external current transformers		Yes

#### Fault limits:

<b>Reference condition / for metering precision</b>		Acc. to IEC62053-22 and IEC62053-23
---	--	-------------------------------------

<b>Formula for relative total measurement inaccuracy</b>		
• for measured variable voltage		+/- 0,3 %
• for measured variable current		+/- 0,2 %
• for measured variable output		+/- 0,5 %
• for measured variable output factor		+/- 0,5 %
• for measured variable active energy		Cl. 0.5 acc. to... IEC62053-22
• for measured variable reactive energy		Class 2 according to IEC61557-12 and/or IEC62053-23

Supply voltage:		
<b>Design of the power supply</b>		Wide-range power supply
<b>Type of voltage / of supply voltage</b>		AC/DC
<b>Relative symmetrical tolerance / of the supply voltage</b>	%	10
<b>Measuring category / supply voltage</b>		CATIII
<b>Supply voltage / 1 / at AC</b>	V	95 ... 240
<b>Apparent power consumption</b>		
• without expansion module(s) / typical	V·A	6
• with expansion module(s) / maximum	V·A	8
<b>Supply voltage / 1 / for DC</b>	/ V	340

Digital input:		
<b>Number of digital inputs</b>		1
<b>Input voltage / at the digital input</b>		
• for DC / rated value	V	24
• final value for signal<1>-recognition	V	8
• initial value for signal<1>-recognition	V	13
<b>Input current / at the digital input</b>		
• for signal <1>	mA	7
<b>Initial delay time / at the digital input</b>		
• for signal <1> after <0> / maximum	ms	5
• for signal <0> after <1> / maximum	ms	5

Digital output:		
<b>Number of digital outputs</b>		1
<b>Design of digital outputs</b>		switching or pulse output function
<b>Norm / for impulse equipment</b>		according to IEC62053-31
<b>Pulse duration</b>	ms	30 ... 500
<b>Adjustable time period / minimum</b>	ms	10
<b>Operating voltage / as output voltage / for DC / maximum permissible</b>	V	30
<b>Output current</b>		
• at the digital output		

• for signal <1>	/ mA	27
• at signal <0> / maximum	mA	0.2
• at the digital outputs / for DC / maximum	mA	100
<b>Output delay time / at the digital output</b>		
• for signal <1> after <0> / maximum	ms	5
• for signal after <0> after <1> / maximum	ms	5
<b>Internal resistance / at the digital outputs</b>	Ω	55
<b>Switching frequency / at the digital output / maximum</b>	Hz	17
<b>Characteristic feature of the output / short-circuit protected</b>		Yes
<b>Measuring category / for digital signals</b>		CATII

<b>Communication:</b>		
<b>Number of interfaces / compliant with fast Ethernet</b>		1
<b>Design of the electrical connection</b>		
• of the fast Ethernet interface		RJ45 (8P8C)
<b>Design of cable / connectable</b>		
• Twisted Pair		Yes
<b>protocol / will be supported</b>		SEAbus TCP / MODBUS TCP (switchable)
<b>Transfer rate</b>	kbit/s	10,000 ... 10,000
<b>Updating time</b>		
• at the interface	s	0.33 ... 1

<b>Indication and operation:</b>		
<b>Number of keys</b>		4
<b>Design of the display</b>		LCD, graphical, monochrome
<b>Color / of the background of the display</b>		white
<b>National language / for the display / is supported</b>		ger, en, fr, spa, ita, por, tur, chi
<b>Horizontal image resolution</b>		128
<b>Vertical screen resolution</b>		96
<b>Width / of the display</b>	mm	72
<b>Height / of the display</b>	mm	54
<b>Updating time / on display</b>	s	0.33 ... 3

<b>Connection elements and terminals:</b>		
<b>Type of connectable conductor cross section / at the measurement inputs for voltage</b>		
• solid		1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )
• finely stranded / with wire end processing		1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
• for AWG conductors / solid		2x 20 to 14
<b>Type of connectable conductor cross section / at the measurement inputs for current</b>		

<ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded / with wire end processing</li> <li>• for AWG conductors / solid</li> </ul>		1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ) 2x 20 to 14
<b>Type of connectable conductor cross section</b> <ul style="list-style-type: none"> <li>• at the inputs for supply voltage <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded / with wire end processing</li> <li>• for AWG conductors / solid</li> </ul> </li> <li>• at the digital inputs / solid</li> </ul>		1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2 (0.5 ... 1.5 mm <sup>2</sup> ) 2x 20 to 14 1x (0.2 ... 2.5 mm <sup>2</sup> ), 2x (0.2 ... 1.0 mm <sup>2</sup> )
<b>Type of connectable conductor cross section</b> <ul style="list-style-type: none"> <li>• at the digital inputs / finely stranded / with wire end processing</li> <li>• at the digital inputs / for AWG conductors / solid</li> </ul>		1x (0.25 ... 2.5 mm <sup>2</sup> ), 2x (0.25 ... 1.0 mm <sup>2</sup> ) 2x 24 ... 18
<b>Type of connectable conductor cross section / at the digital outputs</b> <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded / with wire end processing</li> <li>• for AWG conductors / solid</li> </ul>		1x (0.2 ... 2.5 mm <sup>2</sup> ), 2x (0.2 ... 1.0 mm <sup>2</sup> ) 1x (0.25 ... 2.5 mm <sup>2</sup> ), 2x (0.25 ... 1.0 mm <sup>2</sup> ) 2x 24 ... 18

#### Dimensions and weights:

<b>Suitability for installation</b>		Installation in stationary control panels in closed rooms
<b>Type of fixing/fixation / panel mounting</b>		Yes
<b>mounting position</b>		vertical
<b>Width</b>	mm	96
<b>Height</b>	mm	96
<b>Depth</b>	mm	56
<b>Mounting depth</b>	mm	51
<b>Cutout height</b>	mm	92
<b>Cutout width</b>	mm	92

#### Degree of protection and safety class:

<b>Operating resource protection class</b> <ul style="list-style-type: none"> <li>• when installed</li> </ul>		II
<b>Protection class IP</b> <ul style="list-style-type: none"> <li>• on the front</li> <li>• rear side</li> </ul>		IP65 IP20

#### Ambient conditions:

<b>Ambient temperature</b> <ul style="list-style-type: none"> <li>• during operating</li> <li>• during storage</li> </ul>	°C °C	-10 ... +55 -25 ... +70
<b>Relative humidity / at 25 °C / without condensation</b>		

• during the operating phase	%	5 ... 95
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Norm</b>		
• for environmental coldness check		IEC 60068-2-1
• for environmental dry heat check		IEC 60068-2-2
• for cyclic, environmental damp heat check		IEC 60068-2-30

#### Certificates/approvals:

##### Verification of suitability

- as EC declaration of conformity
- as authorisation for USA
- as authorisation for Canada

IEC 61010-1: 2001 (2nd Ed.) with Corr. 1, EN 61010-1: 2001 (2nd Ed.) and DIN EN 61010-1:2002 with "Berichtigung 1"

UL 61010-1, 2nd Ed. CAN/CSA-C22.2 NO. 61010-1-04

UL 61010-1, 2nd Ed. CAN/CSA-C22.2 NO. 61010-1-04

#### Certificates/approvals:

##### General Product Approval



##### other

[Confirmation](#)



[PROFINET-Certification](#)

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/7KM2112-0BA00-3AA0/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=7KM2112-0BA00-3AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM2112-0BA00-3AA0)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

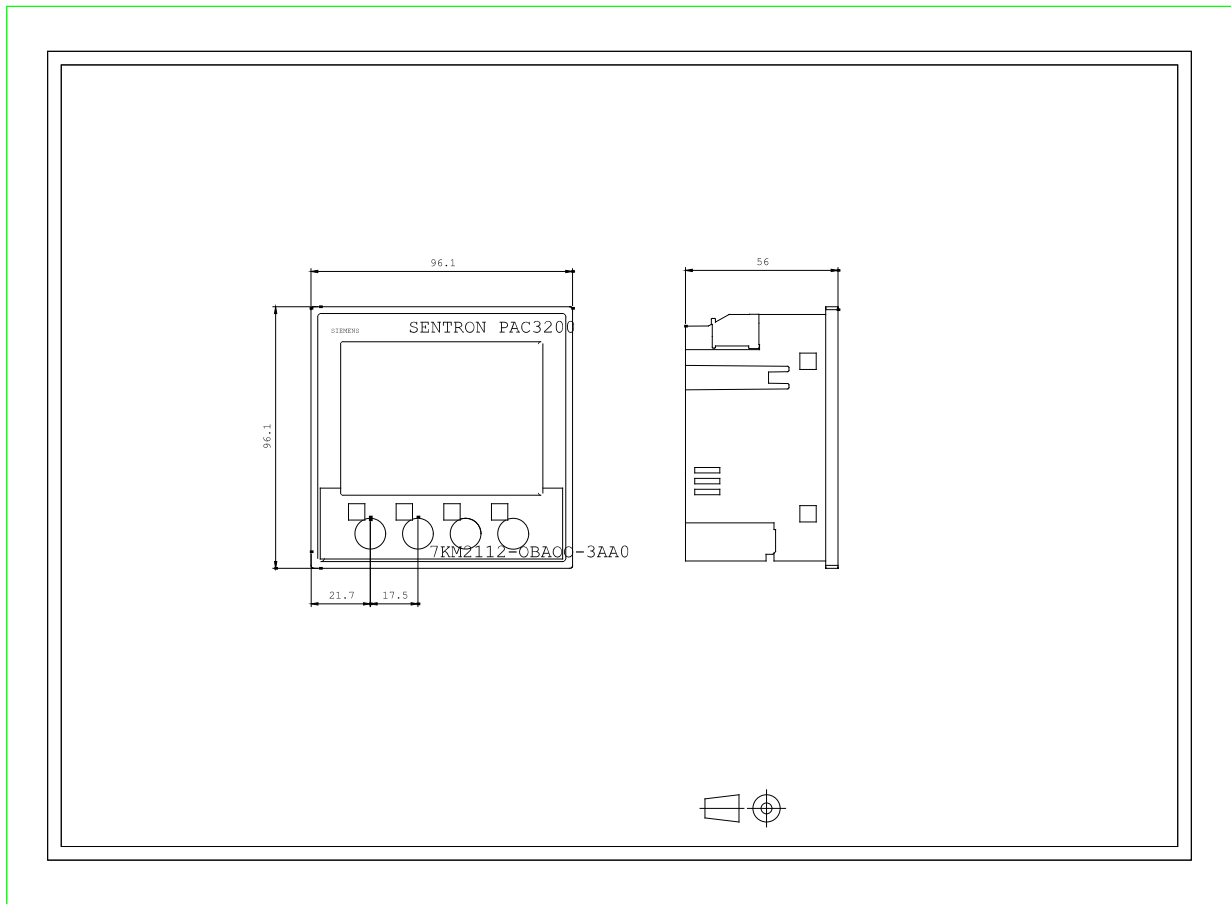

last change:

Feb 11,  
2013