



Chunpeng PC STRAND

Manufacturer in China since 1994



Strands for prestressed concrete

Kay Yang kayang@pcstrand.cc



- with a normal (max. 8 %) and low (max. 2.5 %) relaxation.
- according to EN 10138, ASTM A416, BS 5896, JIS G3536, AS/NZS4672 and to a customer's requirements.
- left and right stranding.
- dry and waxed surfaces.

7 wire strands ASTM A416

Grade	Nominal Dia (mm)	Tolerance (mm)	Nominal Section Area (mm ²)	Mass Per 100 M (kg/100m)	Minimum Breaking Load (kn)	Min Load at 1% Extension (kn)	Min Elongation (Lo ≥ 610mm)(%)	Low Relaxation (%)	Normal Relaxation (%)
250 [1725]	9.5	±0.40	51.6	405	89.0	80.1	3.5	2.5	3.5
	11.1		69.7	548	120.1	108.1			
	12.70	±0.40	92.9	730	160.1	144.1			
	15.20		139.4	1094	240.2	126.2			
270 [1860]	9.53	+0.65	54.84	432	102.3	92.1	3.5	2.5	3.5
	11.11		74.19	582	137.9	124.1			
	12.70	-0.15	98.71	775	183.7	165.3			
	15.24		140.00	1102	260.7	234.6			

Quality



Packing of coils

Anti-rust Packing with wooden pallets

Inner diameter	760mm
Outside diameter	1400mm max
Coil's width:	760mm
Coil's Weight	2500-3500kg



Prestressing Steel Strand 9.3mm, 9.53mm, 12.7mm, 15.2mm as per ASTM A416, BS5896



**PC Strand, PC Wire, Anchorage Factory
Kay Yang
whatsapp: 008615802244573**

Steel strand cable manufacturer in China



**Kay
kayyang@pcstrand.cc
Manufacturer since 1994**

Prestressing post tension wire packing 0.5" cable strand



Wedges and Grips



PC Strand, PC Wire, Anchorage Factory
Kay Yang
whatsapp: 008615802244573




PC Strand, PC Wire, Anchorage Factory
Kay Yang
whatsapp: 0086 158 0224 4573


PC Wire (dia. 4.0-10.0mm)for pole making, mattress frame, rail way etc.



Spiral steel wire, ribbed steel wire, ht wire, high tensile steel wire, wire loading, steel wire factory, China manufacturer

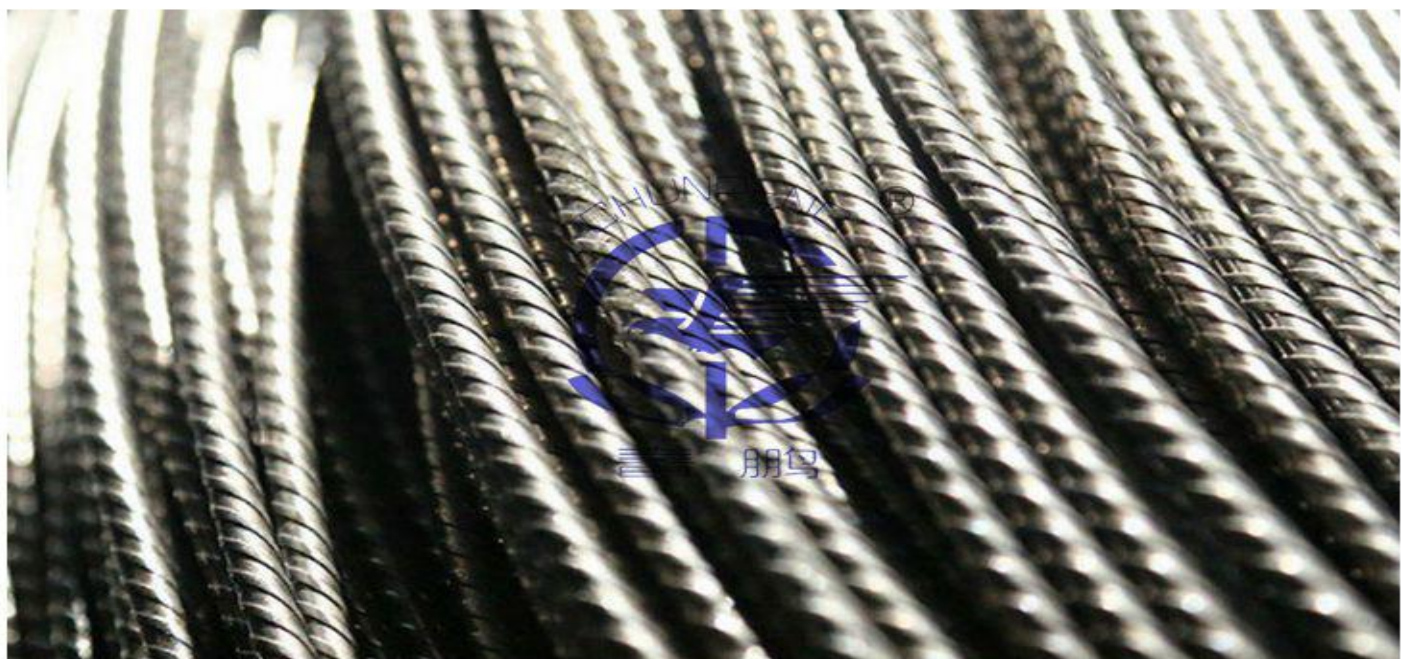

PC wire loading in workshop

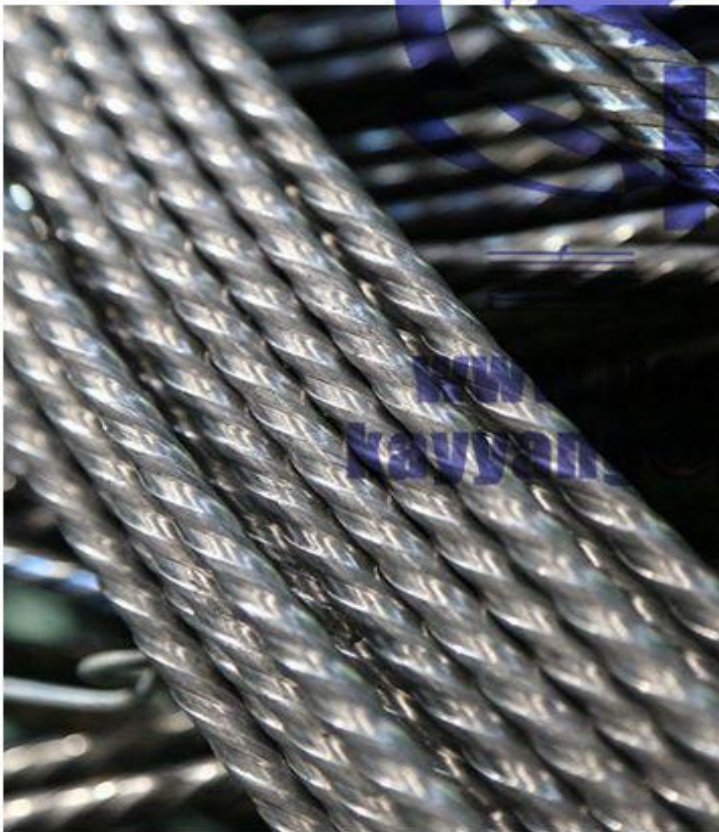

Tianjin Chunpeng Prestressed Concrete Strand Co., Ltd.

Kay Yang (International sales manager)

Tell: 0086 65833508 **Whatsapp: 0086 15802244573** Skype: kayyang12123

Email: kayyang@pcstrand.cc www.pcstrand.cn