

 **PLUSX**

*Let's move for a better tomorrow!*

Plusx, a healthy future, the source of strength!  
A practitioner of "Happy Sports and Smart Fitness"  
and a national fitness service provider.  
Focus, therefore professionalism

# ABOUT US

Jiangsu Kangliyuan Sports Technology Co., Ltd. (Stock Code: 301287), a national high-tech enterprise listed on the Shenzhen Stock Exchange, has specialized in intelligent fitness equipment R&D and manufacturing since 1998. As a premium smart manufacturing partner for Fortune 500 companies including WAL-MART and global brands like ADIDAS and DICKS, the company delivers comprehensive sports and wellness solutions for homes, commercial facilities, and public spaces worldwide.

## Global Smart Manufacturing Network

Headquartered in Xuzhou, Jiangsu, with an intelligent production base in Malaysia, Kangliyuan ensures rapid order fulfillment across Asia-Pacific, Europe, and North America. Supported by 200+ patents and a national R&D center, its CE, FCC, and ISO-certified product portfolio includes smart treadmills, strength-training systems, and outdoor fitness equipment, serving 50+ countries.

## Technology-Driven Excellence

Aligned with the “Made in China 2025” initiative, the company operates a state-certified smart workshop equipped with laser cutters, welding robots, and automated packaging lines. Rigorous quality control is ensured through ROHS-compliant labs and dynamic/static load testing systems. An integrated ERP platform digitizes end-to-end operations from procurement to e-commerce, establishing an industry-leading “Smart Factory” model.

## Pioneering Industry Standards

As a key contributor to fitness equipment standards, Kangliyuan holds certifications for cage football systems, multifunctional sports fields, and public fitness trails, creating a holistic ecosystem for national fitness programs. Driven by its “Internet + Fitness Equipment” strategy, the company is transforming into a service-oriented innovator, merging design, manufacturing, and e-commerce into a seamless value chain.

Looking ahead, Kangliyuan remains dedicated to its mission of “Strengthening National Wellness through Technology”, advancing the vision of “Joyful Sports, Smart Fitness” to become a global leader in sports innovation and deliver sustainable health value to humanity



# Life for Sports

JIANGSU KANGLIYUAN SPORTS TECH.CO.,LTD.

since 1998

# COMMERCIAL TREADMILL



## COMMERCIAL TREADMILL

Our design concept is devoted to establishing a strong and unmistakable presence, with texture and bright, making the products reveal fashion and with elegant style.

## DESIGN CONCEPT

R & D follow the highest standards of ergonomics and biomechanics, replicate the natural movement trajectory of the human body, reproduce the kind of simple, pure, original sense of movement, so that users in the process of moving feel more pleasure.



# Design for high-performance running equipment

## Instantaneous adjust speed and gradient

Just touch the screen to quickly adjust speed and incline

## Instantaneous adjust speed and gradient

Just touch the screen to quickly adjust speed and incline



## High-speed running

Maximum speed: 30 kilometers per hour

## Larger exercise space

Widened running belt design

## Optional slope setting

Gradient range: +20% to 0%





PARAMETER	JX-696S	JX-696T
Motor Power	6.0HP (Peak)	6.0HP (Peak)
Speed	0-20km/h	0-20km/h
Incline	0-20%	0-20%
Running Area	1600x 580mm	1600x 580mm
Assembly size	2140x960x1595mm	2140x960x1595mm
Max user's weight	180kgs	180kgs
Package size	1#225x104x46.5cm 2#109x109x38.5cm	1#225x104x46.5cm 2#109x109x38.5cm
G.W.	—	—
N.W.	217kgs / 218kgs	217kgs / 218kgs
Loading QTY	20set/20GP 40sets/40GP 48sets/40HC	20set/20GP 40sets/40GP 48sets/40HC
Console	LED	18.5" TFT screen
Display	Speed Time Distance Calorie Incline Pulse and 400m laps	Speed Time Distance Calorie Incline Pulse and 400m laps
Features	Roller Diameter: $\phi$ 88mm Running Belt: 2.4mm Deck Thickness: 25mm Flexible MDF board With MP3 link usb port Two built in speakers	Multi Media: USB / WIFI / Bluetooth and MP3 / MP4 / DVD Player Roller Diameter: $\phi$ 88mm Deck Thickness: 25mm Flexible MDF board Running Belt: 2.4mm



PARAMETER	JX-695S	JX-695T
Motor Power	AC motor, 2.2KW	AC motor, 2.2KW
Speed	0-20km/h	0-20km/h
Incline	0-20%	0-20%
Running Area	1500x580mm	1500x580mm
Assembly size	2090x900x1575mm	2090x900x1575mm
Max user's weight	180kgs	180kgs
Package size	—	—
G.W.	—	—
N.W.	170kgs	170kgs
Loading QTY	—	—
Console	LED optional	18.5 TFT
Display	8 exercise programs, 3 customized programs, showing time, speed, incline, heart rate, distance and calories.	8 exercise programs, 3 customized programs, showing time, speed, incline, heart rate, distance and calories.
Features	4 optional running scenes(TFT) Data sharing with WeChat scanning (TFT) Direct button control (Easy to operate) Recovery pattern movement(1-8km/h) 70*535mm comfortable PU foam armrest High-end Touch type keyboard	4 optional running scenes(TFT) Data sharing with WeChat scanning (TFT) Direct button control (Easy to operate) Recovery pattern movement(1-8km/h) 70*535mm comfortable PU foam armrest High-end Touch type keyboard




PARAMETER	TM-500 TV	TM-500 TFT
Motor Power	3.0HP (Actual) / 6.0HP (Peak)	3.0HP (Actual) / 6.0HP(Peak)
Speed	0-20km/h	0-20km/h
Incline	-2% - +20%(Auto)	-2% - +20% (Auto)
Running Area	1600x 580mm	1600x 580mm
Assembly size	2145x955x1615mm	2145x965x1615mm
Max user's weight	180kgs	180kgs
Package size	1#223.2x99x55.1cm 2#67.2x59.5x19.5cm	1#223.2x99x55.1cm 2#67.2x59.5x19.5cm
G.W.	—	—
N.W.	—	—
Loading QTY	21set/20GP 44sets/40GP 48sets/40HQ	21set/20GP 44sets/40GP 48sets/40HC
Console	23.8" TV Screen	23.8" TFT touch screen
Display	Speed Time Distance Calorie Incline Pulse Program	Speed Time Distance Calorie Incline Pulse Program
Features	With bluetooth and wireless mirror screen Roller Diameter: φ88mm Deck Thickness: 25mm Flexible MDF board Running Belt: 2.4mm With MP3 link usb port and ear phone socket Optional: Bluetooth and app Auto Lubrication	With bluetooth and wireless mirror screen Roller Diameter: φ88mm Deck Thickness: 25mm Flexible MDF board Running Belt: 2.4mm With MP3 link usb port and ear phone socket Optional: Bluetooth and app Auto Lubrication



PARAMETER	JXL901 LED	JXL901 TFT
Motor Power	—	—
Speed	24 steps/min - 164 steps/min	24 steps/min - 164 steps/min
Incline	35°	35°
Running Area	50mm	50mm
Assembly size	1800x850x2266mm	1800x850x2266mm
Max user's weight	180kgs	180kgs
Package size	190x90x135cm	190x90x135cm
G.W.	160kgs	160kgs
N.W.	130kgs	130kgs
Loading QTY	18set/20GP 39sets/40GP 54sets/40HQ	21set/20GP 44sets/40GP 48sets/40HQ
Console	23.8" LCD console	23.8" TFT touch screen
Display	Time Speed Distance Calorie	—
Features	Multi-Media: Wi-Fi MP3 MP4 internet, TV, Social Media Ø158mm EMS resistance wheel with brake system Rated voltage: 110V-220V Input power supply voltage: AC110V-220V Time display range: 0:00 - 99:59 Height display range: 0.00—999.9m Calorie display range: 0-999 (Kcal) Level display range: 0 - 15 Step number display range: 0 - 9999 Power cord specification: 10A AC250V	Multi-Media: Wi-Fi MP3 MP4 internet, TV, Social Media Ø158mm EMS resistance wheel with brake system Rated voltage: 110V-220V Input power supply voltage: AC110V-220V Time display range: 0:00 - 99:59 Height display range: 0.00—999.9m Calorie display range: 0-999 (Kcal) Level display range: 0 - 15 Step number display range: 0 - 9999 Power cord specification: 10A AC250V



PARAMETER	JX6802
Motor Power	—
Speed	—
Incline	—
Running Area	1500x480mm
Assembly size	2050x810x1543mm
Max user's weight	180kgs
Package size	199x91x62cm
G.W.	198.5kgs
N.W.	138.5kgs
Loading QTY	18set/20GP 39sets/40GP 54sets/40HQ
Console	5" LCD console
Display	Time Speed Distance Calorie
Features	8level manual magnetic resistance adjustment Running pedrai : Kevlar composite base belt with Nylon strip covered with TPU material to provide smooth and comfortable running experience C196*39.5mm Nylon roller Transmission system: 100pcs NBK 608 deep groove ball bearing

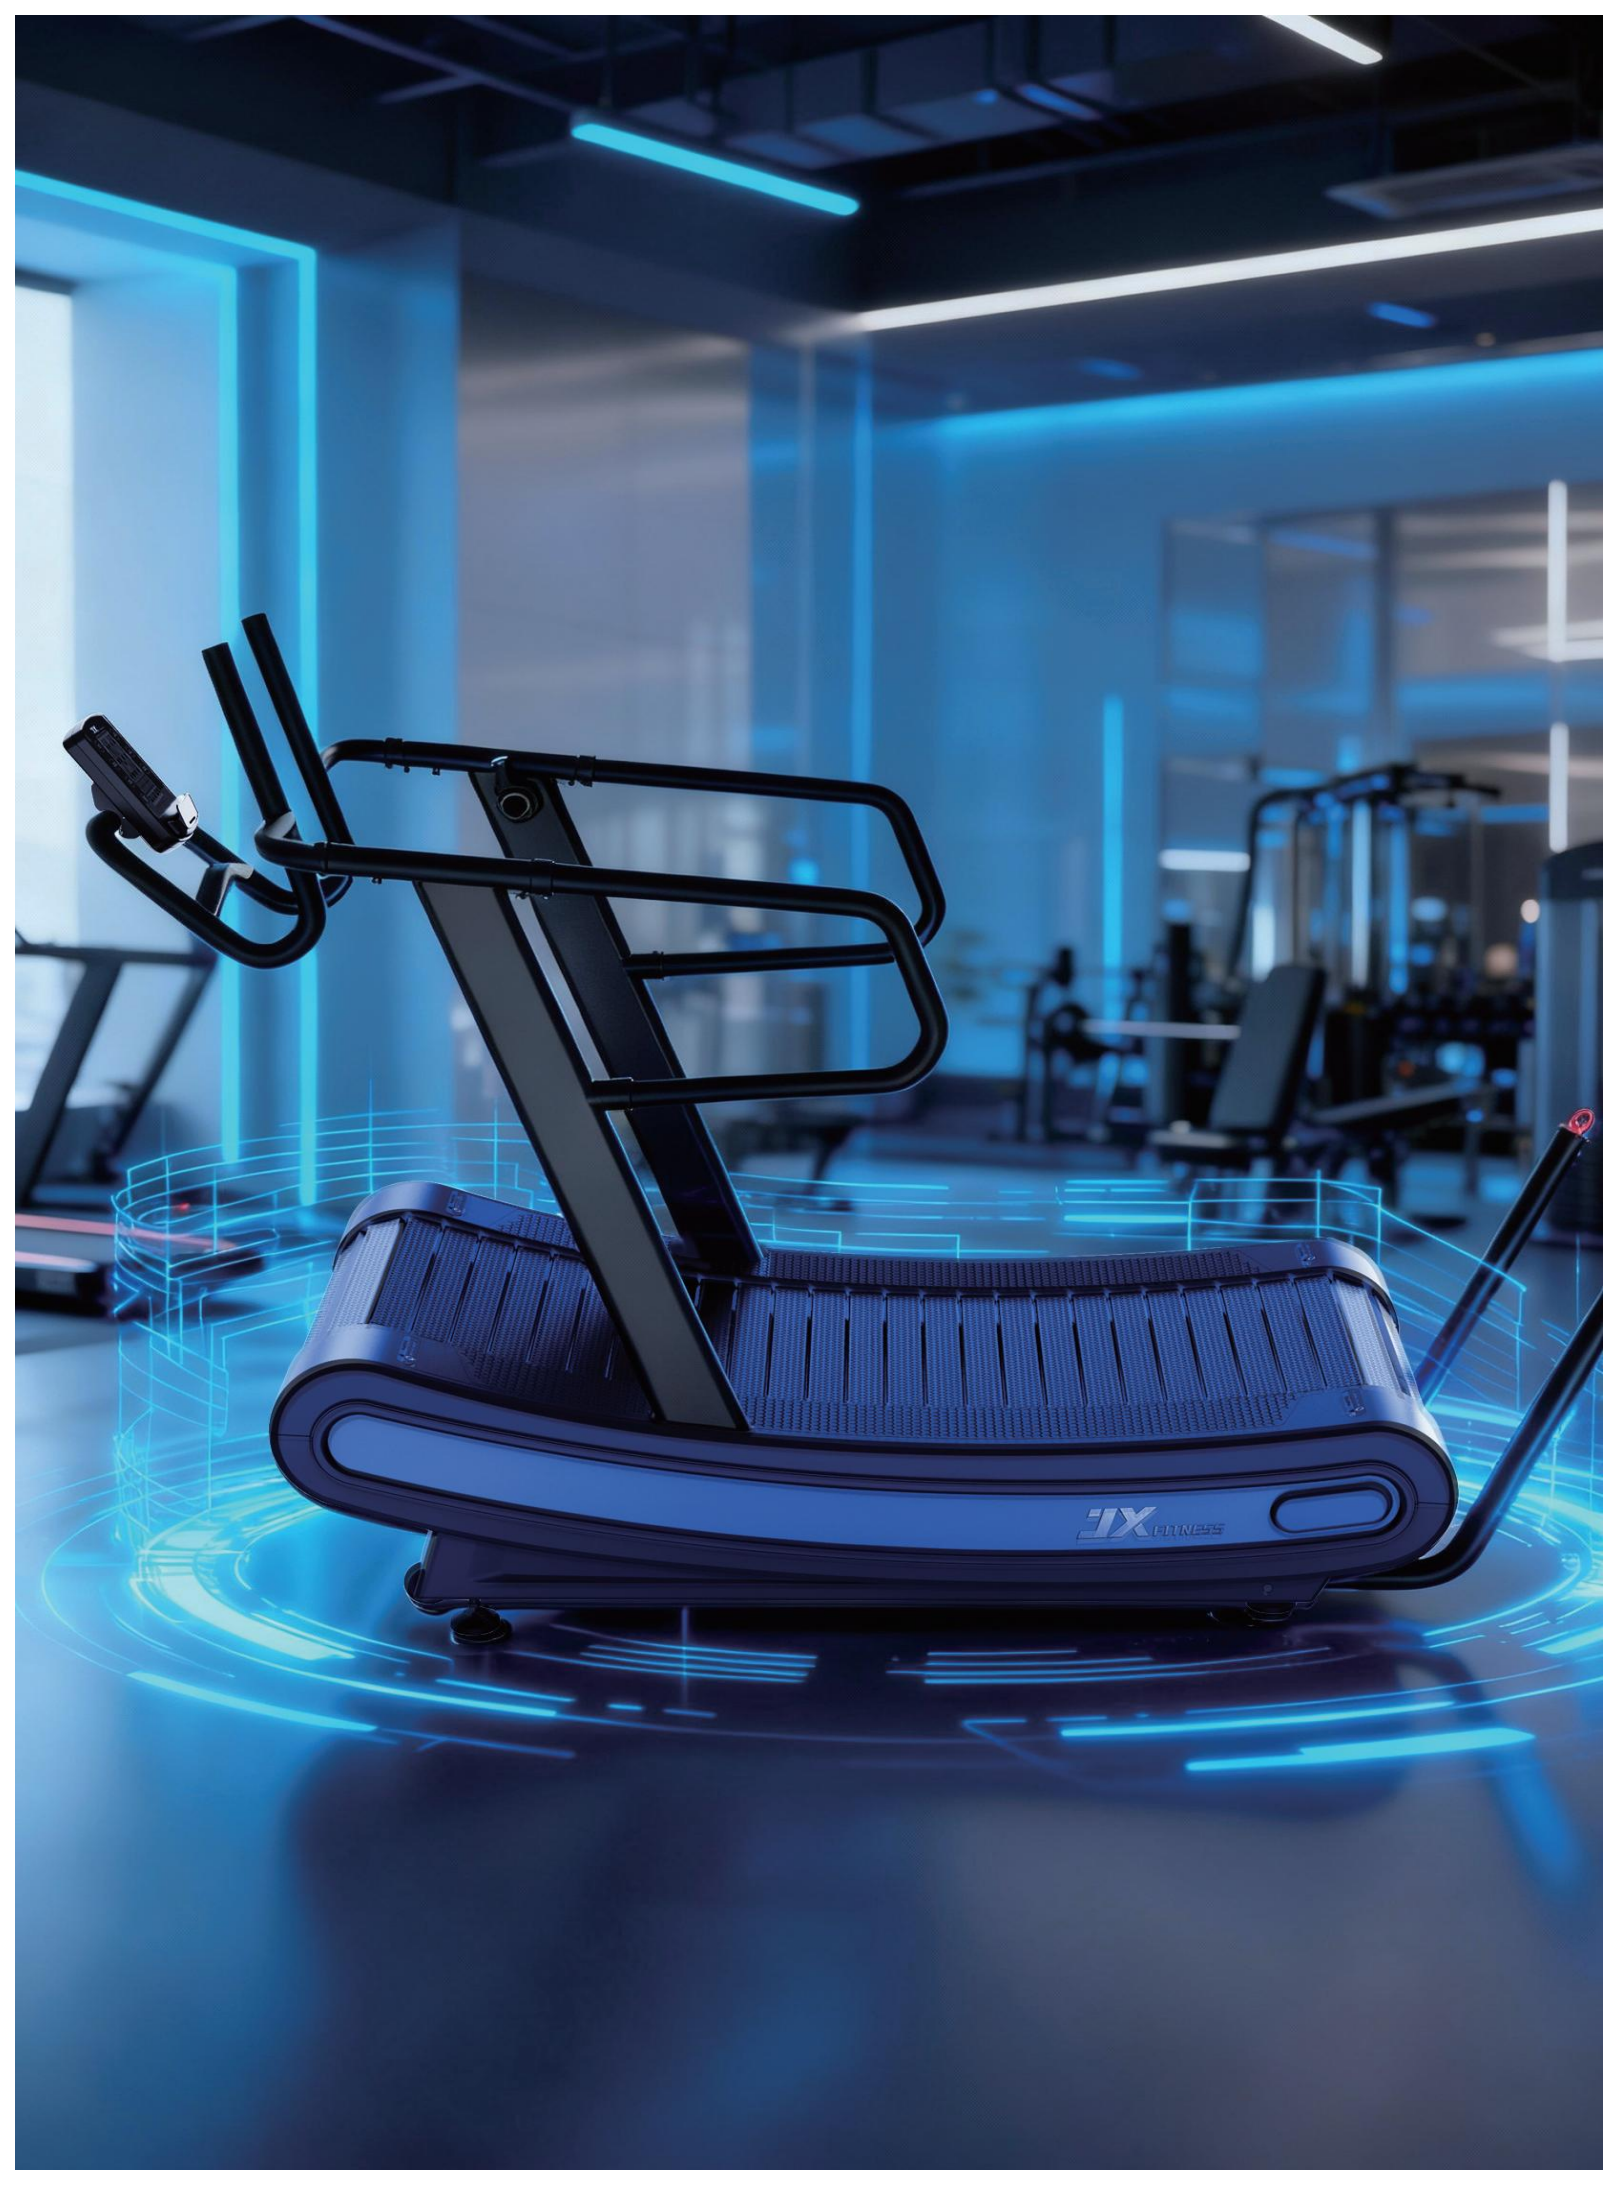


# SPINNING BIKE



## SPINNING

Designers apply natural simple lines design style, the use of parallel load-bearing and triangular super strength support, make the movement more stable. Through a number of handle positions and can be fine-tuning design concept, let users and equipment to achieve the best movement angle.

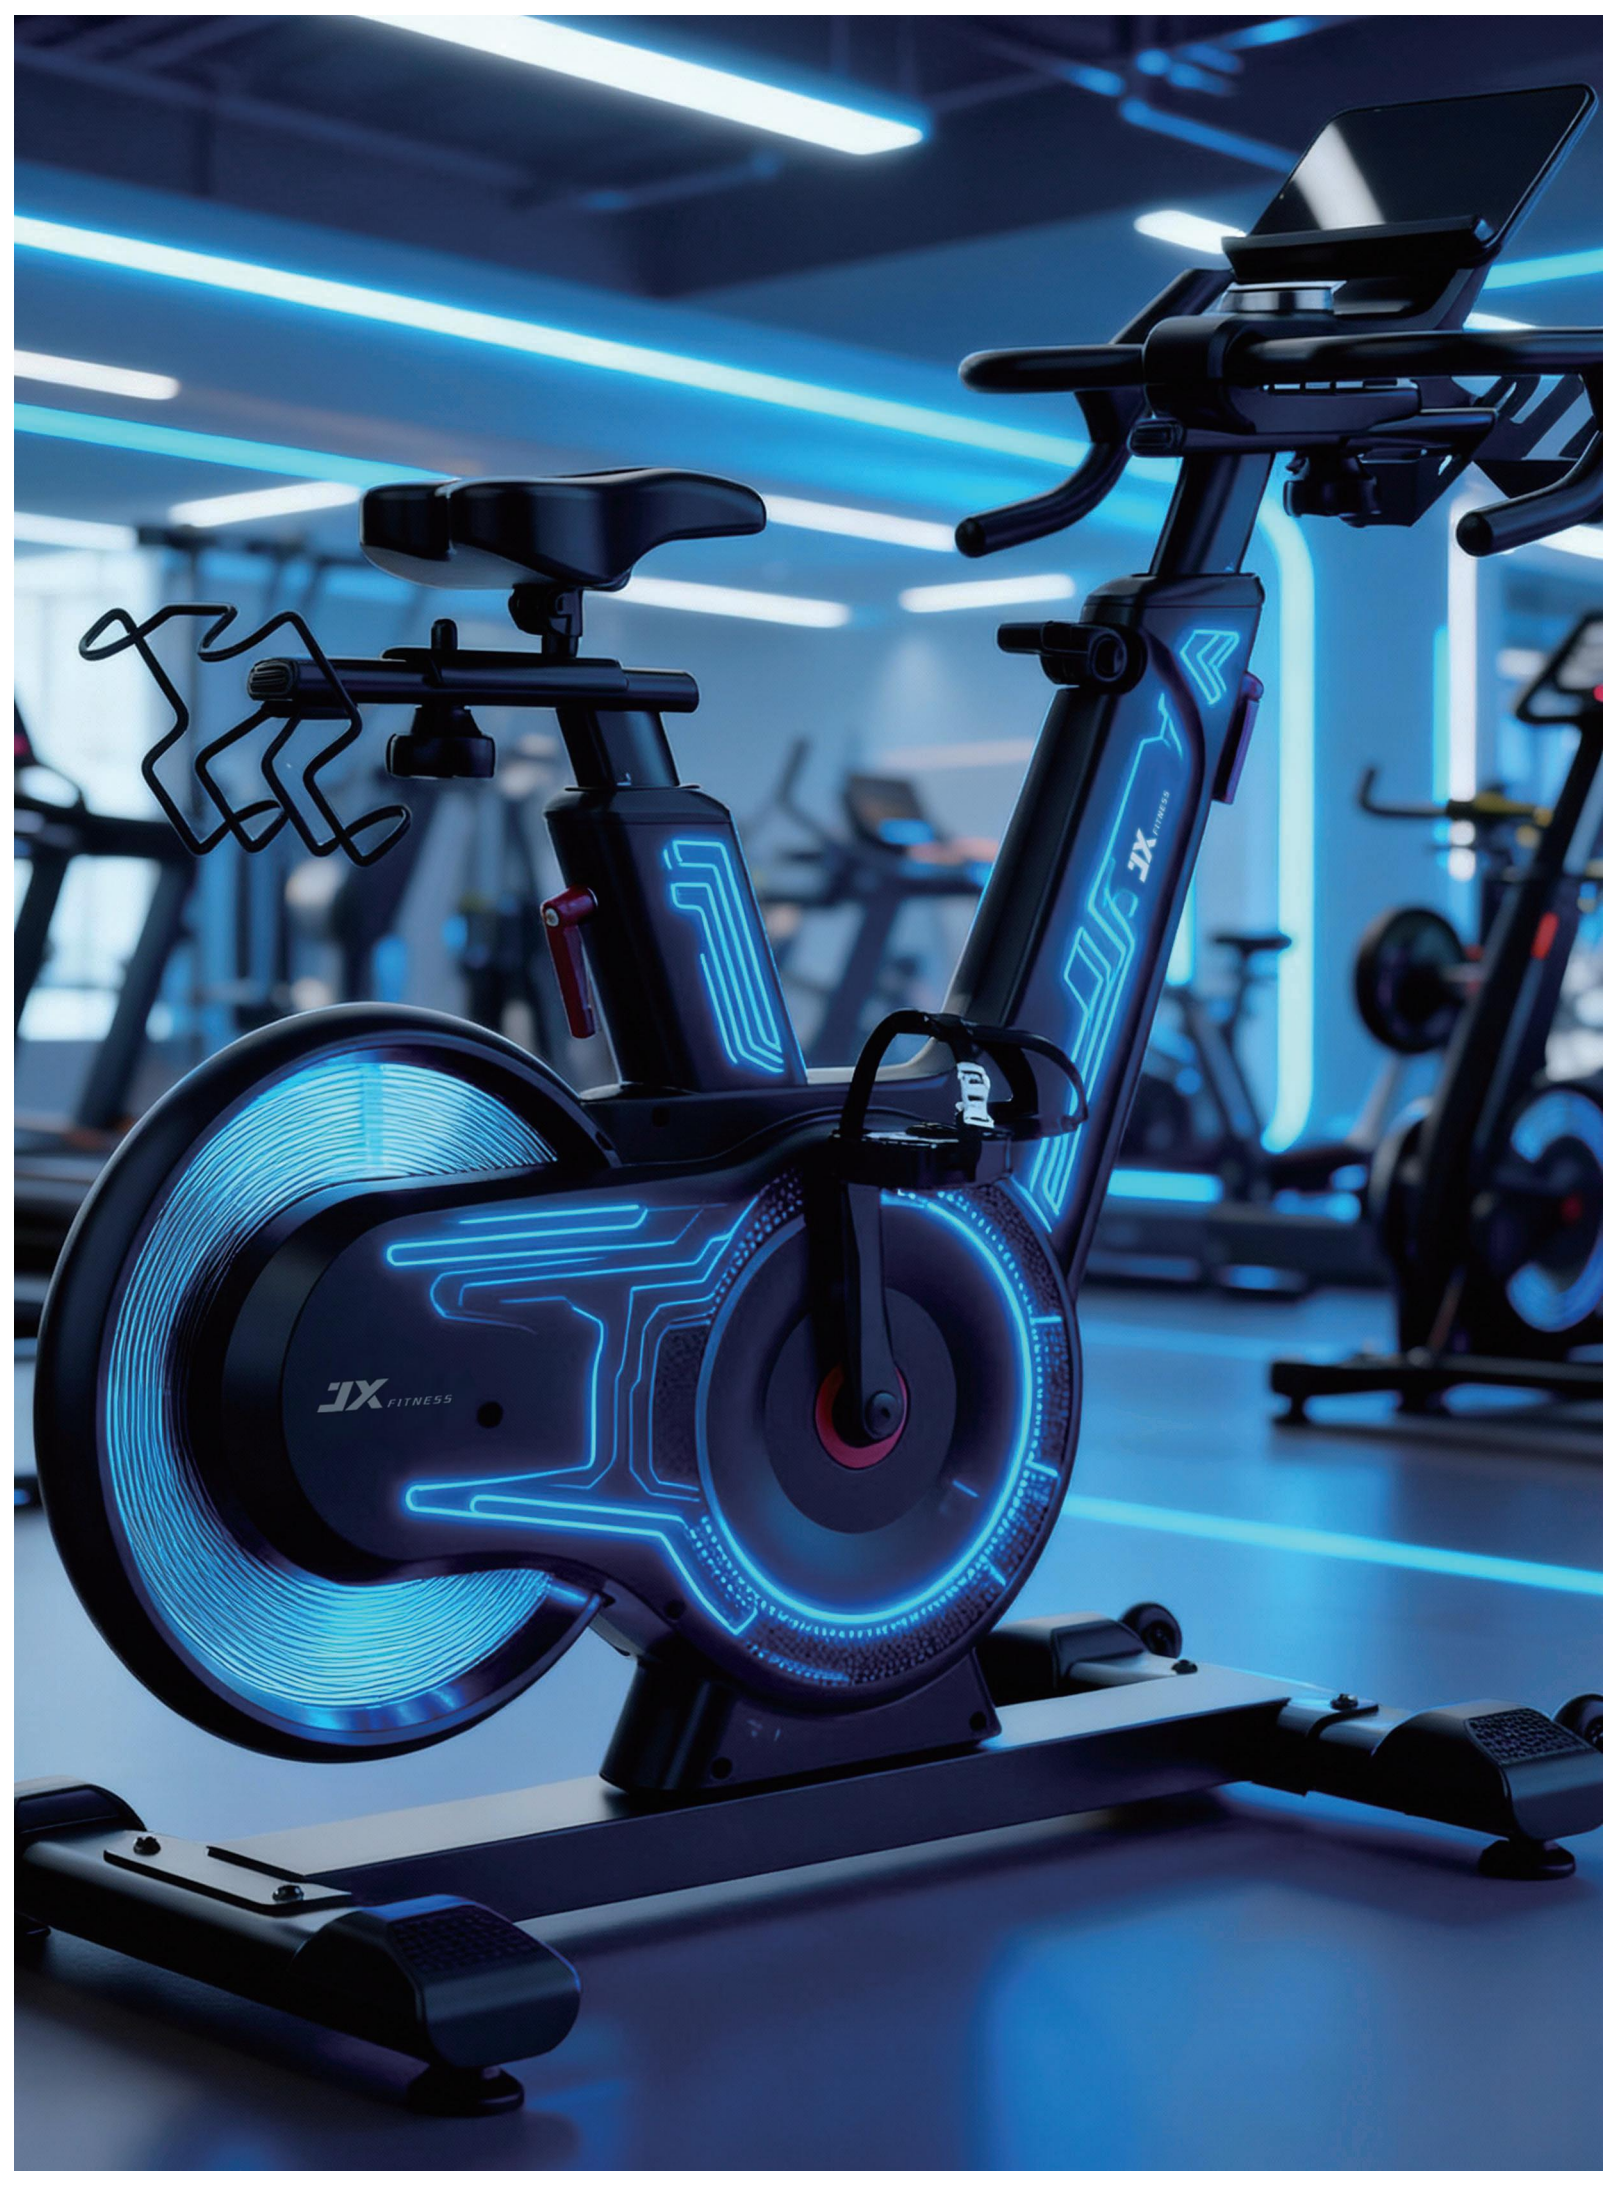



PARAMETER	JX-S1001T	JX-S1002T
Pipe wall thickness	2mm	2mm
Console	10.1" TFT Touch Screen	10.1" TFT Color Screen
Flywheel	11kgs self generator EMS flywheel	11kgs self generator EMS flywheel
Transmission method	Belt	Belt
Braking method	—	—
Assembly size	1120x570x1380mm	1700x740x1380mm
Max user's weight	180kgs	180kgs
Package size	125x58x78cm	175x58x85cm
G.W./N.W.	76kgs/56kgs	104kgs/80kgs
Loading QTY	51sets/20GP 111sets/40GP	32sets/20GP 65sets/40GP 78sets/40HQ



PARAMETER	JX-S1003FT	JX-S1003T
Pipe wall thickness	2mm	2mm
Console	10.1" TFT Touch Screen	10.1" TFT Color Screen
Flywheel	9kgs Disk	—
Transmission method	—	—
Braking method	—	—
Assembly size	1900x660x1700mm	2190x650x1720mm
Max user's weight	150kgs	229x58x85cm
Package size	196x58x92cm	144kgs/114kgs
G.W./N.W.	117kgs/98kgs	217kgs / 218kgs
Loading QTY	22sets/20G 48sets/40GP 48sets/40HC	20sets/20G 50sets/40GP 60sets/40HC



PARAMETER	JX-S1013	JX-S1014
Pipe wall thickness	2mm	2mm
Console	15.6" TFT Touch Screen	15.6" TFT Touch Screen
Flywheel	9kgs	9kgs
Transmission method	—	—
Braking method	—	—
Assembly size	1190x570x1460mm	1700x740x1380mm
Max user's weight	150kgs	150kgs
Package size	130x39x85cm	186x66x94cm
G.W./N.W.	—	—
Loading QTY	50sets/20GP 108sets/40GP 162sets/40HC	18sets/20GP 88sets/40GP



PARAMETER	JX-S1015
Pipe wall thickness	2mm
Console	15.6" TFT Touch Screen
Flywheel	9kgs
Transmission method	—
Braking method	—
Assembly size	2190x690x1900mm
Max user's weight	150kgs
Package size	249x69x88cm
G.W./N.W.	—
Loading QTY	12sets/20G 24sets/40GP 36sets/40HC



PARAMETER	JX-1018	JX-QG-C08
Pipe wall thickness	—	—
Console	Time, Dis. Speed, Resistance level, Calories	—
Flywheel	3.5Kgs Aluminium	6kgs
Transmission method	—	Belt
Braking method	LED Resistance Knob with Bluetooth apps	Solenoid Brake
Assembly size	—	1252x633x1167mm
Max user's weight	150kgs	136kgs
Package size	112x29x89cm	121.5x98.5x30cm
G.W./N.W.	57kgs/50.5kgs	58kgs/49kgs
Loading QTY	82sets/20GP 168sets/40GP 210sets/40HC	151sets/40GP



PARAMETER	JX-1007	JX-S1005
Pipe wall thickness	2mm	—
Console	—	LED
Flywheel	22kgs	—
Transmission method	—	—
Braking method	—	EMS Magnetic System
Assembly size	1235x570x1180mm	1300x950x1810mm
Max user's weight	125kgs	180kgs
Package size	—	130x65x85cm
G.W./N.W.	68kgs/62kgs	98kgs/78kgs
Loading QTY	—	40sets/20GP 80sets/40GP 95sets/40HC

# ROWING

30 minutes=body fat burning,  
commercial rowing equipment  
makes fitness more efficient.  
Simulate the perfect experience  
of real rowing and start a day full  
of vitality



PARAMETER	JX-1004
Console	Blue Backlight LCD console
Display	12 program profile,4Users memory,Time,Distance, Strokes,Strokes/mins,Total Strokes,Pulse,500/TM, Calories, Watt, HRC, Clock, Temperature, Recovery
Tension	16 Level Program Tension Adjustment
Assembly size	2340x520x950mm
Max user's weight	180kgs
Package size	1# 107x46x103cm 2# 157x11x22cm
G.W./N.W.	60kgs/55kgs
Loading QTY	62sets/20GP 132sets/40G 134sets/40HQ 48sets/40HC



PARAMETER	JX-2038	JX-2046
Console	LCD Console	15.6" TFT screen
Display	STROKE/TOTAL STROKE/CALORIES/ SCAN/TIME/- PULSE (with CY's receiver)	Quick Start,Interval,Map my route,Constant Power,Programs,Heart Rate Control, Multimedia
Resistance System	—	—
Tension	—	EMS electromagnetic magnetic resistance adjustment
Assembly size	2280x565x760mm	2050x640x1250mm
Max user's weight	150kgs	180kgs
Package size	1#113x66x78cm 2#140x10x14cm	1#92x28x98cm 2#142.5x11.5x8cm
G.W./N.W.	55kgs/49kgs	60kgs/44kgs
Loading QTY	48sets/20GP 102sets/40G 102sets/40HQ	110sets/20GP 230sets/40G 260sets/40HQ



<http://junxia.en.alibaba.com>

---

**Jiangsu Kangliyuan Sports Tech.Co.,Ltd.**  
**Email:youhai@junxia.net tradejunxia@junxia.net**  
**Address:Binhu Avenue,Paoche Economic Development Zone,Pizhou City,Jiangsu Province,China**  
**Branch Factory: Located in Jalan Tampoi. Johor Bahru Malaysia**



Jiangsu Kangliyuan Sports Tech.Co.,Ltd.

Email: youhai@junxia.net

tradejunxia@junxia.net

Address: Binhu Avenue, Paoche Economic Development  
Zone, Pizhou City, Jiangsu Province, China

Branch Factory: Located in Jalan Tampoi. Johor Bahru Malaysia