


### 5.1 LINE ARRAY SYSTEM



Model	AO-5.4	AO-12B	AO-12B DSP
Type	Passive	Passive	Active
Driver	2x 5" MF; 2x 1" HF (COX)	1x 12" LF	
MF rated Power/ Peak	120W/8Ω 480W/ Peak	400W/8Ω 1600W/Peak	
HF rated Power/ Peak	20W/8Ω 60W/ Peak		
Sensitivity	94dB	100dB	100dB
Impedance	8Ω	6Ω	6Ω
Rated maximum SPL	99dB peak @1m	118dB peak @1m	118dB peak @1m
Frequency range	100Hz-20KHz	40Hz-350Hz	40Hz-350Hz
Damping Factor			≥400
Operating Voltage			110-270V
Weight	5KG		19KG
Dimensions(WxDxH)	375x180x216mm	375x420x395mm	

- Features:
- Portable type, Easy to carry
  - Amplifier built-in, No need separately amplifier
  - With DSP function, controlled signal on computer
  - 18mm Birch plywood cabinet
  - Coaxial speaker design, Clean sound

Application:  
Meeting room, mini indoor/outdoor show, theater church etc.

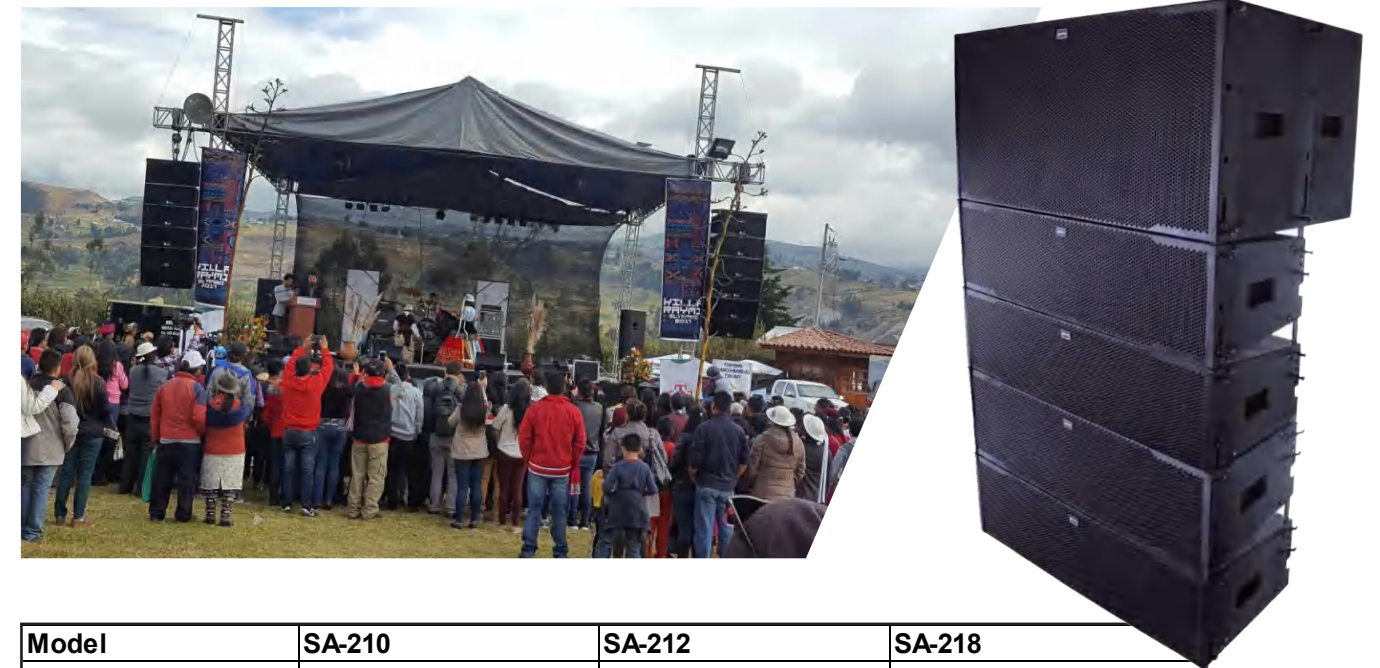

Model	SA-210	SA-212	SA-218
Type	Passive	Passive	Passive
Driver	2x 10" MF; 2x 1.75" HF	2x 12" MF; 2x 1.75" HF	2x 18" LOW
MF rated Power/ Peak	600W/8Ω 2200W/ Peak	750W/8Ω 2500W/Peak	1200W/8Ω 4800W/Peak
HF rated Power/ Peak	150W/8Ω 600W/ Peak	180W/8Ω 650W/ Peak	
Sensitivity	105dB	107dB	
Impedance	8Ω	8Ω	8Ω
Rated maximum SPL	135dB peak @1m	145dB peak @1m	145dB peak @1m
Frequency range	60Hz-20KHz	60Hz-20KHz	40Hz-300Hz
Dispersion Angle(1KHz)	120°x20°	120°x20°	
Weight	35KG	41KG	69KG
Dimensions(WxDxH)	1064x400x321mm	1064x400x392mm	1064x658x572mm



- Features:
- Portable type, Easy to carry
  - Amplifier built-in, No need separately amplifier
  - With DSP function, controlled signal on computer
  - 18mm Birch plywood cabinet
  - Powerful and Clean sound

Application:  
Meeting room, mini indoor/outdoor show, theater church etc.

Model	SA-208	SA-210B	SA-18B
Type	Active	Passive	Active
Driver	2x 8" MF; 2x 1.75" HF	2x 10" MF; 2x 1.75" HF	1x 18" LF
MF rated Power/ Peak	400W/8Ω 1600W/ Peak	500W/8Ω 2000W/Peak	800W/8Ω 2400W/Peak
HF rated Power/ Peak	150W/8Ω 600W/ Peak	150W/8Ω 600W/ Peak	
Sensitivity	102dB	105dB	
Impedance	8Ω	6Ω	6Ω
Rated maximum SPL	124dB peak @1m	129dB peak @1m	
Frequency range	70Hz-20KHz	60Hz-20KHz	50Hz-300Hz
Dispersion Angle(1KHz)	120°x20°	120°x20°	
Operating Voltage	110-270V	110-270V	110-270V
Weight	5KG		19KG
Dimensions(WxDxH)	630x380x270mm	1064x400x321mm	630x700x510mm



- Features:
- Professional Passive type (Active selectable)
  - Big Powerful speaker for outdoor event !
  - Combine with FP series Amplifier, great team!
  - 18mm Birch plywood cabinet
  - Powerful and Strong sound
  - Connection: Speakon-socket (4-pint)

Application:  
Big performance, indoor/outdoor show, concert, stadium etc.





**HOT**

**Features:**

- Portable type, Easy to carry
- Crossover built-in
- Popular design, Brown and Black color
- 18mm Birch plywood cabinet
- Powerful and Clean sound


**Application:**

Meeting room, mini indoor/outdoor event, theater church etc.

KA-208

KA-210

Model	KA-208	KA-210	KA-18 / S
Type	Passive	Passive	Passive
Driver	2x 8" MF; 2x 1.75" HF	2x 10" MF; 2x 1.75" HF	1x 18" LF
MF rated Power/ Peak	450W/8Ω 1600W/ Peak	600W/8Ω 2400W/Peak	700W/8Ω 2500W/Peak
HF rated Power/ Peak	100W/8Ω 400W/ Peak	150W/8Ω 600W/ Peak	
Sensitivity	126dB	128dB	
Impedance	8Ω	8Ω	8Ω
Rated maximum SPL	129dB peak @1m	135dB peak @1m	
Frequency range	70Hz-20KHz	60Hz-20KHz	50Hz-300Hz
Weight	27KG	28KG	52KG
Dimensions(WxDxH)	700x380x250mm	800x320x550mm	750 x 540 x 707mm

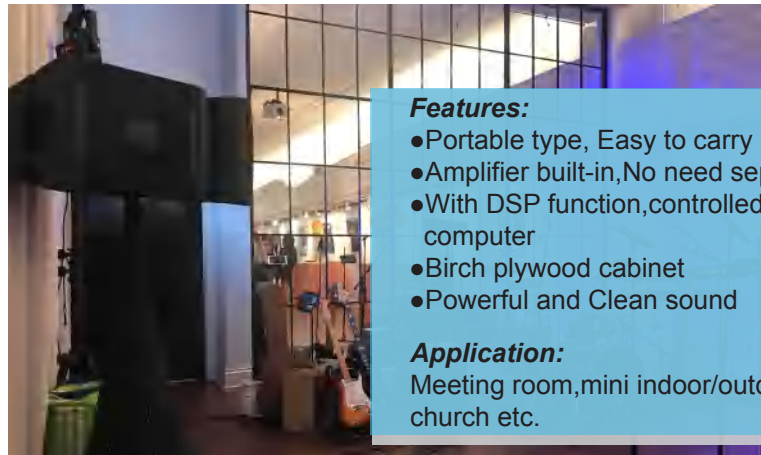

**Features:**

- Portable type, Easy to carry
- Amplifier built-in, No need separately amplifier
- With DSP function, controlled signal on computer
- Birch plywood cabinet
- Powerful and Clean sound

**Application:**

Meeting room, mini indoor/outdoor show, theater church etc.

Model	VX932	VX918S
Type	Passive/ Active	Passive/ Active
Driver	1x 12" MF; 3x 3" HF	1x 18" LF
MF rated Power/ Peak	350W/8Ω 1400W/ Peak	800W/8Ω 2400W/Peak
HF rated Power/ Peak	150W/8Ω 450W/ Peak	
Sensitivity	126dB	
Impedance	8Ω	8Ω
Rated maximum SPL	129dB peak @1m	
Frequency range	70Hz-20KHz	40Hz-300Hz
Weight	30KG	40KG
Dimensions(WxDxH)	343x379x595mm	597x 747x 515mm



SN2010

SN2012



**OUTDOOR EVENT**



Model	SN-2010	SN-2012	SN-18 / S
Type	Passive	Passive	Passive
Driver	2x 10" MF; 2x 3" HF	2x 12" MF; 2x 3" HF	1x 18" LOW
MF rated Power/ Peak	600W/8Ω 2000W/ Peak	750W/8Ω 2200W/Peak	800W/8Ω 2400W/Peak
HF rated Power/ Peak	150W/8Ω 600W/ Peak	150W/8Ω 600W/ Peak	
Sensitivity	105dB	107dB	
Impedance	8Ω	8Ω	8Ω
Rated maximum SPL	135dB peak @1m	145dB peak @1m	145dB peak @1m
Frequency range	60Hz-20KHz	60Hz-20KHz	40Hz-300Hz
Weight	31KG	57KG	69KG
Dimensions(WxDxH)	790x390x295mm	905x505x350mm	905x690x510mm

**5.2 SUBWOOFER SPEAKER**

**Double 18 inch**



VX932



SN8028



VX918S



S-218+

Model	SN8028	S-218+
Type	Passive	Passive
Driver	2x 18" LOW	2x 18" LOW
MF rated Power/ Peak	1250W/8Ω 3000W/Peak	1200W/8Ω 2700W/Peak
HF rated Power/ Peak		
Sensitivity		
Impedance	8Ω	8Ω
Rated maximum SPL	145dB peak @1m	145dB peak @1m
Frequency range	40Hz-300Hz	40Hz-300Hz
Weight	75KG	73KG
Dimensions(WxDxH)	1060x590x700mm	1070x800*570cm mm



### 5.2 COAXIAL SPEAKER



Model	D-300	D-400S	S-118
Type	Passive	Passive	Passive
Driver	1x 12" MF; 1x 3" HF	1x 15" MF; 1x 3" HF	1x 18" LOW
MF rated Power/ Peak	400W/8Ω 1600W/ Peak	500W/8Ω 2000W/ Peak	900W/8Ω 2500W/ Peak
HF rated Power/ Peak	150W/8Ω 500W/ Peak	150W/8Ω 500W/ Peak	
Sensitivity	105dB	107dB	
Impedance	8Ω	8Ω	8Ω
Rated maximum SPL	135dB peak @1m	145dB peak @1m	145dB peak @1m
Frequency range	60Hz-20KHz	60Hz-20KHz	40Hz-300Hz
Weight	17KG	26KG	44KG
Dimensions(WxDxH)	400X400X420mm	500X500X520mm	650X560X700mm



With Bag (selectable)



### 5.2 MONITOR SPEAKER

Model	SY-15
Type	Passive
Driver	1x 15" MF Neodymium ; 1x 3" HF Neodymium
MF rated Power/ Peak	500W/8Ω 2000W/ Peak
HF rated Power/ Peak	150W/8Ω 500W/ Peak
Sensitivity	107dB
Impedance	8Ω
Rated maximum SPL	129dB peak @1m
Frequency range	55-19KHz
Weight	19KG
Dimensions(WxDxH)	590x330x570mm



### QF SERIES

Model	QF12M	QF15M
Type	Passive & Active	Passive & Active
Driver	1x 12" MF; 1x 3" HF	1x 15" MF; 1x 3" HF
MF rated Power/ Peak	400W/8Ω 1600W/ Peak	450W/8Ω 1800W/ Peak
HF rated Power/ Peak	100W/8Ω 400W/ Peak	150W/8Ω 500W/ Peak
Sensitivity	105dB	107dB
Impedance	8Ω	8Ω
Rated maximum SPL	135dB peak @1m	145dB peak @1m
Frequency range	60Hz-20KHz	60Hz-20KHz
Weight	20KG	29KG
Dimensions(WxDxH)	605*415*360mm	695*515*420mm

### PS SERIES

Model	PS-12	PS-15
Type	Passive	Passive
Driver	1x 12" MF; 1x 3" HF	1x 15" MF; 1x 3" HF
MF rated Power/ Peak	400W/8Ω 1600W/ Peak	450W/8Ω 1800W/ Peak
HF rated Power/ Peak	100W/8Ω 400W/ Peak	150W/8Ω 500W/ Peak
Sensitivity	105dB	107dB
Impedance	8Ω	8Ω
Rated maximum SPL	135dB peak @1m	145dB peak @1m
Frequency range	60Hz-20KHz	60Hz-20KHz
Gross Weight	20KG	29KG
Dimensions(WxDxH)	425x390x640mm	530x440x735mm