2.4G 2.9 inch Electronic Shelf Label SETRV3-0290-3D SPECIFICATION

BASED ON 2.4G COMMUNICATION CLOUD PLATFORM

DALIAN SERTAG TECHNOLOGY CO., LTD

REV	DESCRIPTION	RELEASE DATE	EDITOR
3.0	Preliminary Release	2021/3/1	



Contents

1. General Description	3
2. Feature	
3. Specification	
4. Network Structure	
5 Why Select SERTAG Label	6



1. General Description

SERTAG's platform is a complete hardware-software system combining 2.4Ghz wireless communication and ESL tags, in-store navigation, ultralow power displays, merchandising supports and tools, and server infrastructure (cloud, distributed, or in- store). SERTAG's platform is open to third-party technologies and enables interconnection with any situation software or system. It offers the flexibility you need to anticipate and overcome any challenge.

SETRV3 series ESL tags with high-definition displays can be adapted to any sales scenario. It supports text, promotion, QR code, or barcode and can be reused with no paper required. It can be used for different applications, such as another kind of logistics management.

2. Feature

- ure SMART TAG LEADE
- Black/white/Red colors are available for ESLs.
- Cloud or local Server based options.
- The communication band is 2.4GHz

4

3. Specification

3.1 Product appearance






3.2 Feature

NO.	ITEM	DATA
1	Part NO.	SETRV3-0290-3D
2	Outline	91.2mm(H) ×42mm(V)×12mm(D)
3	Weight	40g
4	Color Display	Black, White, Red
5	Display Size	2.90 inch
6	Display Resolution	296(H)×128(V)
7	DPI SV	112RT TAG LEADER
8	Active Area	66.9mm(H)×29.06mm(V)
9	View Angle	>170°
10	Communication Band	2.4G
11	Communication Protocol	Private Protocol
12	Communication distance	Communication radius 12~15m
13	Communication success rate	100%
14	Operating temperature	0~40°C
15	Storage temperature	0~40°C
16	Operating humidity	45%~70%RH

3.3 Function

NO.	ITEM	DESCRIBE
1	Data display	Support the transmission and display of other contents such as text, pictures, symbols, and so on in any language.
2	NFC communication	Each tag can support the NFC communication function. [optional]
3	Temperature detection	Each tag supports temperature sampling, and the system can be read.
4	Electric quantity detection	Each tag supports the power sampling function, which can be read by the system.
5	LED light flicker setting	Support 3 color-independent control lights. Each light flashing frequency is1 time per second. The flashing times of each lamp can be set by the user.

4. Network Structure

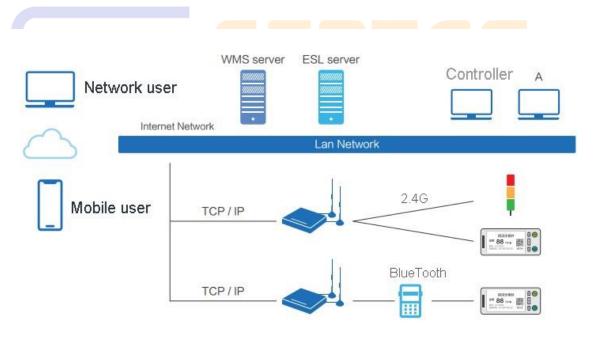

5. Why Select SERTAG Label

	Advantages	Pictures	
ESL Cloud			
•	ESL Cloud system is a cloud server-based complete solution with hardware and auto-updating software. All ESL tags can be controlled anytime and anywhere with a cloud server. All data can be shared on the cloud.	BLE CLOUD BIG DATA CENTRAL CLOUD SERVER	
API	interface		
•	Provided API interface to the third-party, for embedding our ESL into their system, and providing a more powerful, flexible, and competitive solution to end customers.	API	
Sup	perior readability	Heir S	
•	High Contrast: Use an E-paper display with	The Inc. Part	
	black and red on 'paper-white' background.	7. 2.	
•	Near 180° viewing angle with excellent readability.	Site Solution shots	
Cus	tom-made Template design	The Gimbal Experience	
•	It's easy to edit and create display templates.	Citized attents over it country and attent in country and attent in country and attents.	
•	You can use any font in your system. It also		
	enables any combination of text and images		
	including QR code, Barcode, logos, pictures, etc.		
•	Negative explicit mode and special symbols		
	are available.		
Versatility			
•	ESLs available in a range of different sizes and		

- ESLs available in a range of different sizes and specifications to suit all requirements across an entire retail estate.
- It can be customized with many functions to enhance customers' experience.

