# 2.4G 7.5 inch 4-Colors Electronic Label SETRV3-0750-89 Specification

DALIAN SERTAG TECHNOLOGY CO., LTD

#### ■ Product Appearance



#### **■** Product Introduction


The 7.5-inch four-color electronic label SETV3-0750-89 uses advanced E-Ink electronic paper technology and supports black, white, red and yellow four-color display, providing a more flexible price management solution for the retail industry. The electronic shelf label has ultra-low power consumption, high-definition visualization, remote wireless update and other features, enabling merchants to achieve fast and accurate product information adjustments and improve operational efficiency.

This electronic paper display label is suitable for multiple application scenarios such as supermarkets, convenience stores, warehouse management and medical care, helping digital upgrades. It supports text, pictures, QR codes or barcodes, and is reusable without paper.

#### **■** Product Parameters

| Item                     | Parameters                        |
|--------------------------|-----------------------------------|
| Model                    | SETV3-0750-89                     |
| Dimensions(mm)           | 178 x 126.58 x 9                  |
| Weight                   | 186g                              |
| Display Technology       | Full graphic E-ink display        |
| Pixel Color              | Black, white, red, yellow         |
| Display Size             | 7.5 inch                          |
| Active Area(mm)          | 163.2 x 97.9                      |
| Resolution(Pixel)        | 800 x 480                         |
| DPI                      | 136                               |
| Viewing Angle            | >170°                             |
| Operating Temperature    | 0~40°C                            |
| Storage Temperature      | <b>0~40</b> ℃                     |
| Operating Humidity       | 45%~70%RH                         |
| Protection Grade         | IP65                              |
| Battery                  | 6 x CR2430 AG LEADE               |
| Wireless Connectivity    | Private Protocol                  |
| ESL Operating Frequency  | 2.400~2.480GHz, Maximum EIRP≤10mW |
| Communication Mode       | AP                                |
| Communication Distance   | Within 30m (Open distance: 50m)   |
| NFC                      | Yes                               |
| Wireless Firmware Update | Yes                               |
| Usable Pages             | 8                                 |
| LED                      | Red, green, blue                  |
| Compliance               | CE, RoHS                          |

#### **■** Product Drawing

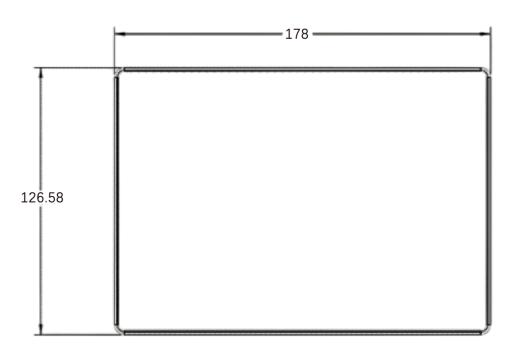




#### **■** Main Function

| NO. | Function       | Description   |
|-----|----------------|---|
| 1   | E-ink Display  | <ul> <li>7.5-inch black, white, red, and yellow four-color electronic paper display</li> <li>Low power consumption, long battery life</li> <li>Nearly 180° viewing angle</li> </ul> |
| 2   | ESL Management | <ul> <li>The ESL cloud system is a complete solution based<br/>on a cloud server, including hardware and<br/>automatically updated software.</li> </ul>                             |
|     |                | <ul> <li>All ESL labels can be controlled anytime and<br/>anywhere through the cloud server.</li> </ul>   |
|     |                | <ul> <li>All data can be shared in the cloud.</li> </ul>  |
|     |                | <ul> <li>In addition to being deployed to the customer's</li> </ul>   |

|   |                            | cloud server, the centralized management system can also be deployed on a local physical server   |
|---|----------------------------|---|
| 3 | NFC                        | <ul> <li>Built-in NFC allows you to connect to your<br/>smartphone, send offers, switch to a new page or<br/>log in to an online store.</li> </ul>                          |
| 4 | Wireless<br>Communications | Support remote batch update of displayed content  |
| 5 | Content Display            | <ul> <li>Supports the transmission and display of text, pictures, symbols, QR codes, barcodes and other content in any language.</li> <li>Supports DIY templates</li> </ul> |
| 6 | API Interface              | <ul> <li>Providing API interfaces to third parties allows us<br/>to embed our ESL into users' own systems.</li> </ul>   |

### ■ System Structure Diagram

## Business System ERP System Management Background Interface Modules Provide API interface Provide API interface ESL Base Station ESL data is forwarded by the base station ESL data is forwarded by the base station 2.46

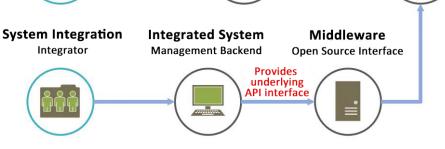

Actively obtain data

**Private Protocol** 

#### **■** ESL Solutions

The complete ESL (electronic shelf label) solution includes electronic tags, base stations, management software and accessories. The base station is responsible for wireless communication with the electronic tags to achieve remote updates of price and product information; the management software provides data synchronization, inventory management and price adjustment functions; accessories such as mounting brackets and batteries ensure the stable operation of the system. This solution can help retailers efficiently manage product information, improve operational efficiency, and optimize user experience.

