

7.3 inch 2.4G Electronic Tags SETPG0730C_D Specification

DALIAN SERTAG TECHNOLOGY CO., LTD

SERTAG


7.3 inch 2.4G Electronic Tags SETPG0730C_D

TECHNICAL DETAILS	Product model	SETPG0730C_D
	Dimensions (mm)	176.2*137.15*80mm
	Display Technology	E ink (Double-Sided Screen)
	Active Display Area (mm)	163.2(H) * 97.92(V)
	Resolution (pixels)	800*480
	Appearance Color	Silver
	Pixel Colors	Black/White/Red/Yellow/Orange/Blue/Green
	Viewing Angle	Nearly 180°
	Working Temperature	15~35°C
	Product Weight	268g
	Battery	2300mAh
	Power	Lithium battery power supply (Type-C interface charging)
	Battery Lifetime	3~5 years (updated twice a day)
	ESL Operating Frequency	2.4G
	Support Content Format	Text/Picture/QR code/Barcode
	Communication Radius	30m
	Template Design DIY	Yes
Communication Equipment	Gateway: SETP_Router_V4.4 / SETP_Router_V2.4	

Operating Process

http://192.168.1.171/esls_new/mms/tologin

- ① Click on the link to log in to the table card management system.

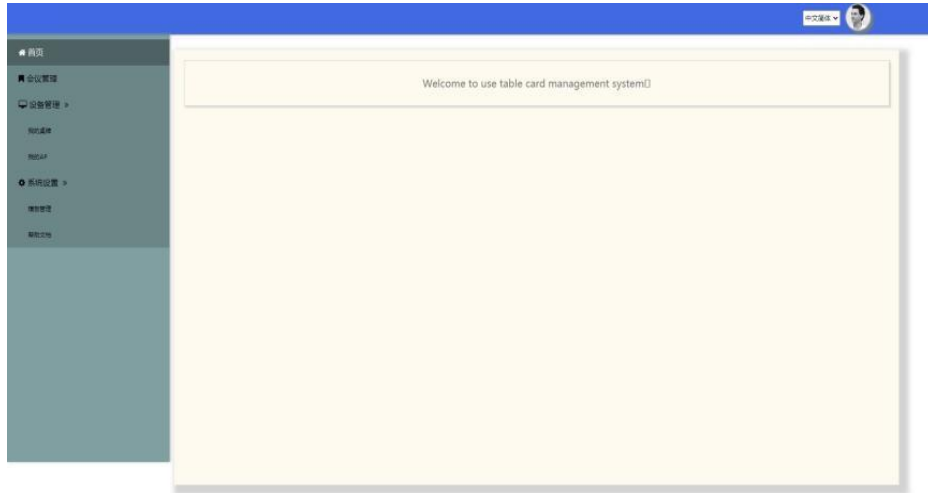

- ② Meeting Management-Add Meeting
- ③ Select the template type-add a table card to match the table card address.
- ④ Refresh the table card data.

序号	桌牌地址	标签状态	bg12	部门	职务	姓名
1	99.95.66.43	更新完成	bg12	XX市公安局	刑警队长	李XX

Usually, it only takes 5 or 6 steps to modify and use normally.

- ⑥ Update the contents of conference table cards.

(A large number of applications can also export excel tables, modify the editing contents and then import the tables.)