



Tianjin Qihang Plastic Technology Co.,.Ltd

www.qihangrubber.com

COMPANY PROFILE >>>



Tianjin Qihang Plastic Technology Co., Ltd. has many years of experience in the development and production of rubber products. Qihang rubber was established in Tianjin. It is an industrial and trade integration enterprise integrating scientific research, production, sales and service. The production adopts domestic advanced production technology, with an annual output of more than 36000 tons and a warehouse of 4000 square meters.

The company has passed ISO9001 quality management system certification, and has a large number of product research and development personnel and testing personnel, stable quality and cost-effective.

Our products are exported to all over the world, mainly exported to Europe, Southeast Asia, Asia and other places.

Our product cover are epdm rubber sheets,esd rubber sheets,NBR rubber sheets,NR rubber sheets,SBR rubber sheets,FKM rubber sheets,CR rubber sheets,neoprene rubber sheets,Insert cloth rubber sheets,insulation rubber sheets,non-slip rubber sheets,PVC rubber sheets,silicone rubber sheets,oil-resistant rubber sheets,black rubber sheets, cow mat,horse stall mats,pvc floor mat,rubber mat,rubber roll etc.

welcome businessmen from all over the world to cooperate with us, and hope to establish long-term good cooperative relations.



CORPORATE CULTURE

Vision: We commit to become a well-known brand in the rubber and plastic industry.

Mission: let our products spread all over the world; let us become a loyal partner of customers; let the company become a second home of employees.

Values: responsibility, quality, service, solidarity, innovation, win-win



Anti slip Rubber Sheet


Thickness: 3mm-8mm

Width: 0.5-1.6m

Length: Customized

Pattern: Coin, Diamond, Checker, Stripe

Application: For floor with shock resistant, oil resistant, Insulation, wear resistant.

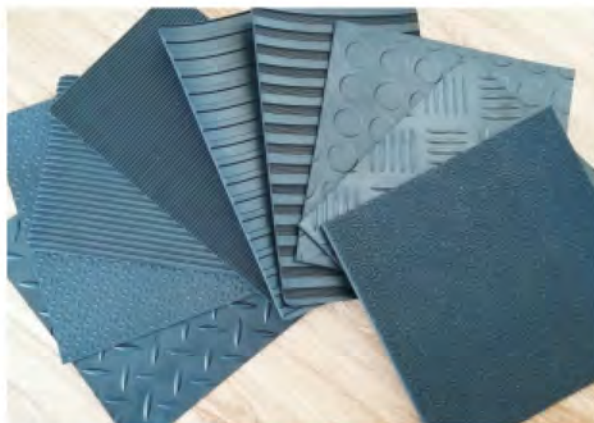

PVC anti slip sheet

Color pattern optional,

Feature: Anti-aging, anti-UV, strong acid, strong alkali resistant, flame retardant, oil resistant, scratch resistant, insulation.

Application: Used in workshop, shopping mall, restaurant, meeting room, swimming pool, balcony, kitchen, bathroom, etc.



Cow Mat

Thickness: 10mm-25mm


Size: 1m*2m 1.22m*1.83m

Product performance: the product surface distribution uniform ball with the function of anti slip and massage. The groove on the bottom surface increases the friction with the ground, which can timely discharge sewage to keep the ground dry.

Feature: Anti slip, anti static, heat insulation, easy to clean, easy to replace, anti fatigue, anti epidemic, no odor, high elastic.

Life time: 5-7 years.

Application: cow sleeping shed, milking hall, delivery room, horse farm, softball field, etc.

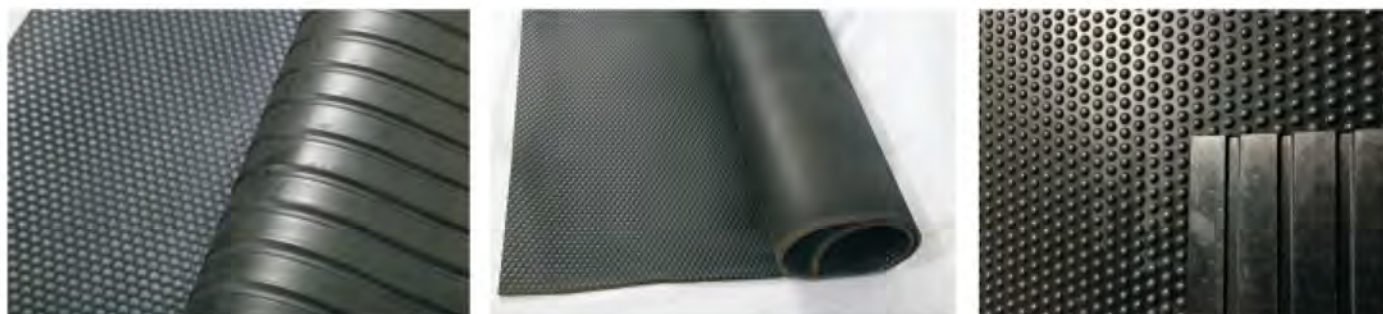

Silicone rubber sheet

Thickness: 0.3-80mm Width: 100mm*2000mm

Performance: high temperature resistance, the highest temperature is 200°C, good oil resistance;

Application: working in oil medium in low and high temperature environment, it can be used to make oil seal, gasket, seal, good sealing performance, used in medicine, chemical industry and food industry;




EPDM Rubber sheet

Size: 1-80mm X 100-2000mm

Feature: Working Temperature is -30°C to 100°C Oil resistant, weather resistant and aging resistant.

Application: it is suitable for rubber construction of sluice gate, bridge and other projects, waterproof and water-proof roof and silicon pad and seal with higher requirements.

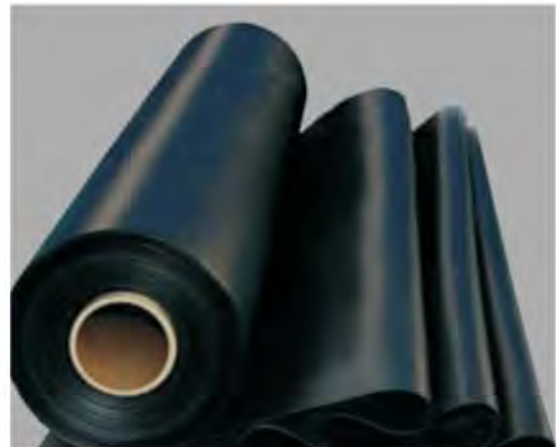

Nitrile Rubber Sheet (NBR)

Size: 1-80mm X 100-2000mm

Feature: Working Temperature is -30°C~100°C. Oil resistant, weather resistant and aging resistant. Working in oil (machine oil/diesel/gasoline/lubricating oil) with tightness and anti-expansion.

Application: It is used for punching various kinds of oil resistant/sealing parts /sealing rings, and oil contact workbench/floor/electronic product place.

For special size and special technical requirements of the product, we can produce as customer requirement.




Neoprene rubber sheet

Specification: thickness 1-80mm x width 500~2000mm x length customized

Performance: good oil resistance, sealing, shock absorption.

Applications: widely used in electronic, thermal aging places, bridge shock absorption, can be used as oil resistant materials.

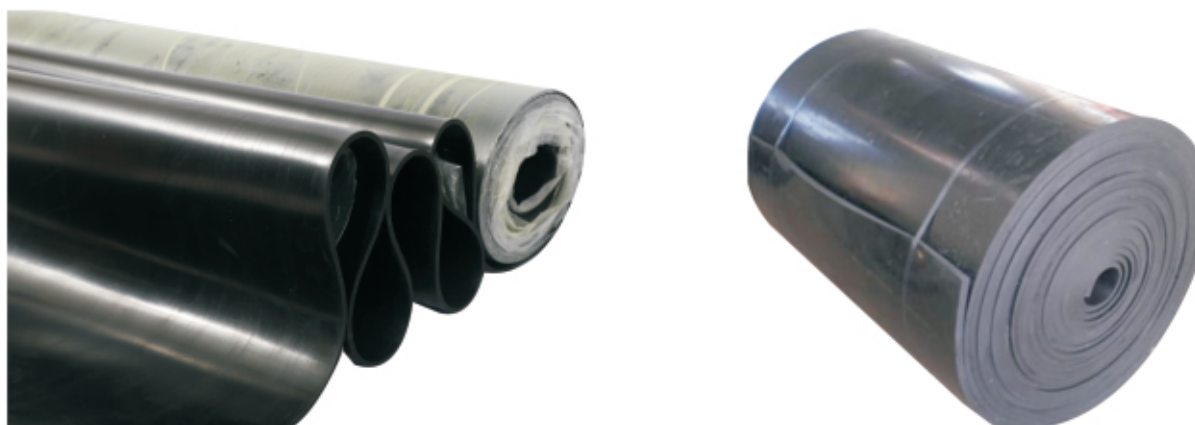


Fluorine (Viton) rubber sheet

Performance: the best oil resistance, flame retardant, high temperature resistance, chemical corrosion resistance and aging resistance,

Specification: specific gravity: 2.0; Tensile Strength: 8Mpa; Elongation: 300%; Hardness: 75° ±5°;

Usages: punching various kinds of high oil resistance, flame retardant, high temperature corrosion resistance seal, seal ring, cylinder die jacket and aerospace, aviation applications;

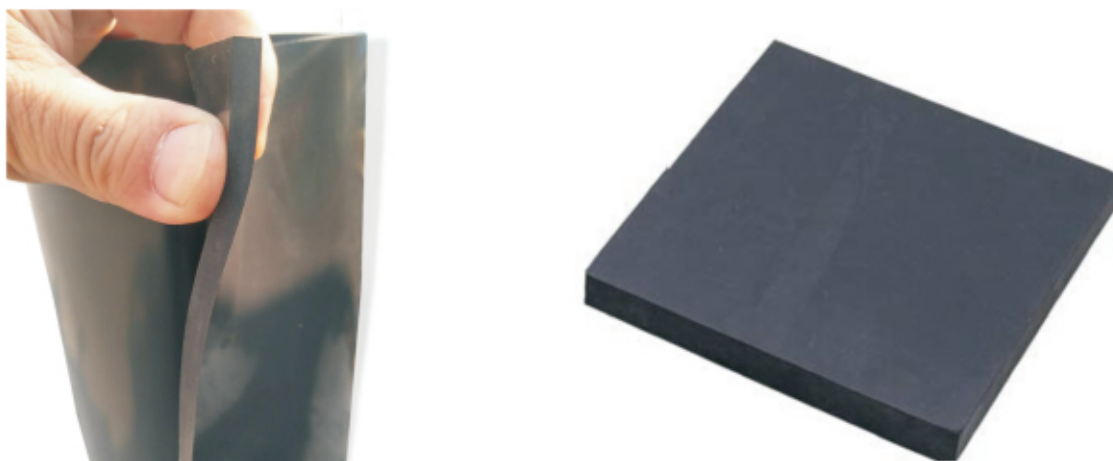

Natural rubber sheet

Thickness: 1-120mm Width: 0.5-2m Specific Gravity: 1.1-1.7

Tensile strength: 3Mpa-18Mpa Elongation: 280%-500% Hardness: 50°-70°

Application: suitable for all kinds of product quality requirements buffer ring, seal.





Insulation Rubber Sheet

Color: Red, Green, Black

Thickness: 3-50mm

Insulation grade: 5kv 10kv 15kv 20kv 25kv 30kv 35kv

Application: Suitable for auxiliary protection of electrical equipment, generator room/operation workshop/distribution room, etc

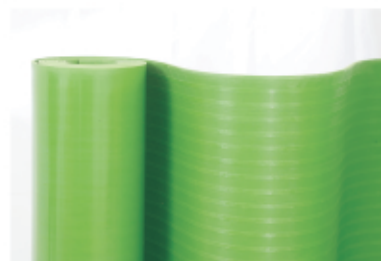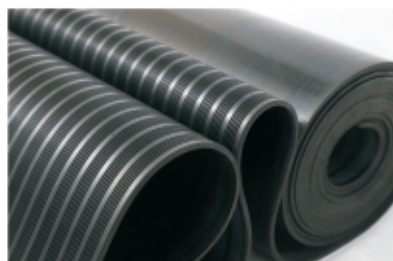


Cloth Insertion rubber sheet

Specification: thickness 1-80mm x width 500 ~ 2000mm x length unlimited

Parameters: product material, density and cloth diameter are specified by the customer, interlayer :1~2 layers.

Features: increase the tensile strength of the product

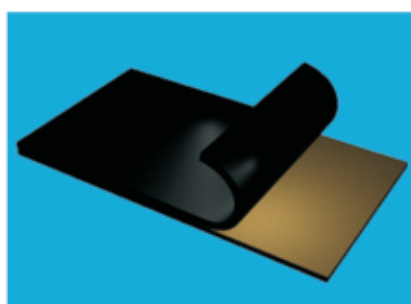

Anti static Rubber Sheet

Anti static rubber sheet also known as electrostatic skin.

Color: Green + Black

Feature: gorgeous color, good wear resistant, excellent anti static, electrostatic.

Anti static index 10^6 - 10^9 ohms, conducting static index 10^1 - 10^6 ohms.

Technical parameters: the rubber mat with two colors is made of light color in the surface, conductive materials are anti static agents, black bottom and the conductive materials are carbon black. Flat and non-crimp, not affected by moisture, and can effectively resist corrosion, high temperature, easy to clean and maintain.

Application: It can be used in the computer room and workbench for floor.



Flame retardant rubber sheet


Specification: thickness 1-80mm x width 500~2000mm x length unlimited

Performance: high flame retardant coefficient, good elasticity, high utility rate.

Specific gravity: 1.6-1.8 Tensile strength : 3.5Mpa

Elongation: 250% Hardness: $75^{\circ} \pm 5^{\circ}$ oxygen index >28

Application: anti - combustion, high oxygen index, suitable for all kinds of fire prevention places and refrigerators, air conditioners.

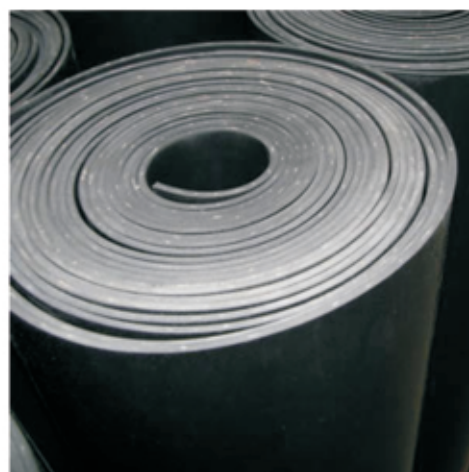




Rubber Block

Thickness:15–100mm

Length:Customized

Type:Industrial rubber block/Eco-friendly rubber block/High elastic rubber block /Natural rubber block

Application:Floor,shock resistant for equipment,Insulation,Oil resistant, Noise resistant

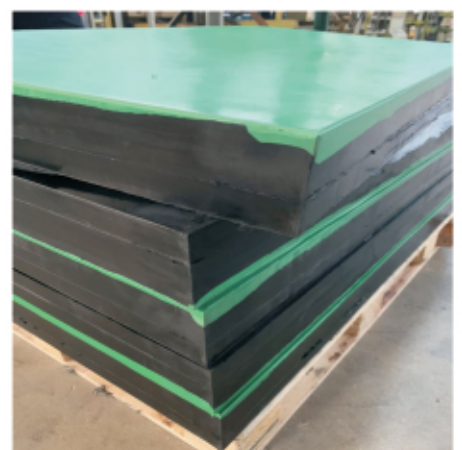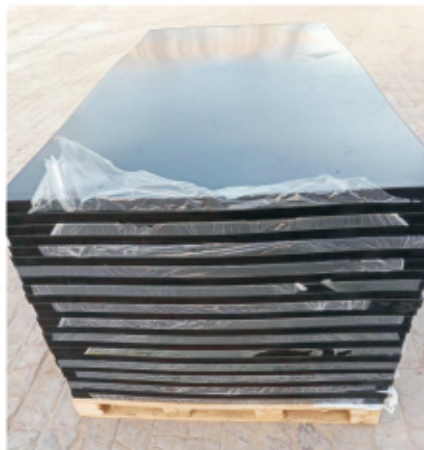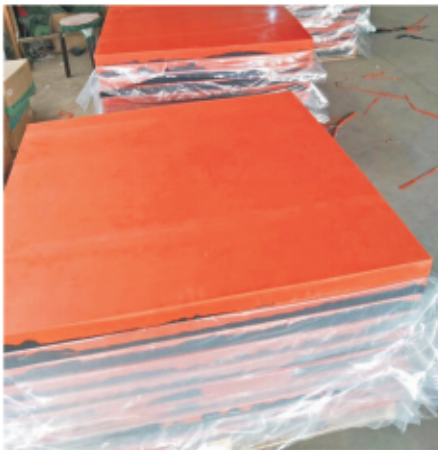

Processing with customized different size rubber blocks, strips and so on.

Equipped with large block cutting machine, strip cutting machine, high accuracy and fast delivery.



PVC PLASTIC SHEET

Features:

1. High heat resistance, cold resistance, strong acid, alkali resistance, pressure resistance, static electricity resistance, impact resistance, tension resistance, aging resistance, good light transmission, long service life.
2. For the restaurant can reduce the cleaning cost, add elegant and beautiful restaurant. For personal office, warm in winter and cool in summer, elastic, with insulation, moisture-proof, heat insulation, sound insulation, anti-corrosion, anti-impact, no deformation, no fracture, anti-light, anti-fading, weather resistance.
3. Anti-aging is widely used in electronic, chemical, pharmaceutical, food factory, clothing factory, working platform, machine surface, table tablecloth, etc.
4. Product features: green, AZO free, recyclable durable.
5. Direct contact with food.

Thickness	0.3-5mm, Other sizes can be customized
Width	0.3-2m, Other sizes can be customized
Usage	Banquet, Hotel, Outdoor, Party, Wedding, event
Color	transparent



ENTERPRISE SCENE >>>



WAREHOUSE & MACHINE



 Tianjin Qihang Plastic Technology Co., Ltd.

 Address: Tianjin, China

 Web: www.qihangrubber.com

 Tel: 0086-022-87802922

 Email: postmaster@qihangrubber.com