




NovoTrack
Rubber Products

天津纽威特橡胶制品股份有限公司
TIANJIN NOVOTRACK RUBBER PRODUCTS CO., LTD.



Company profile

NovoTrack prefabricated rubber coils strictly follow the standards of the World Athletics Federation and China Athletics Association, select high-quality raw materials, and are carefully manufactured with world-leading first-class equipment and technology. Obtained the certification of the World Athletics Federation (IAAF); "Official partner of the Chinese Athletics Association (prefabricated rubber) (2014-2017); Certificate of the Chinese Athletics Association; "Golden Track" award issued by the Chinese Athletics Association; materials; In terms of environmental performance, it has obtained a child-level certification product certificate; the company has passed ISO9000, ISO14000, OHSMS18000 management system certification.

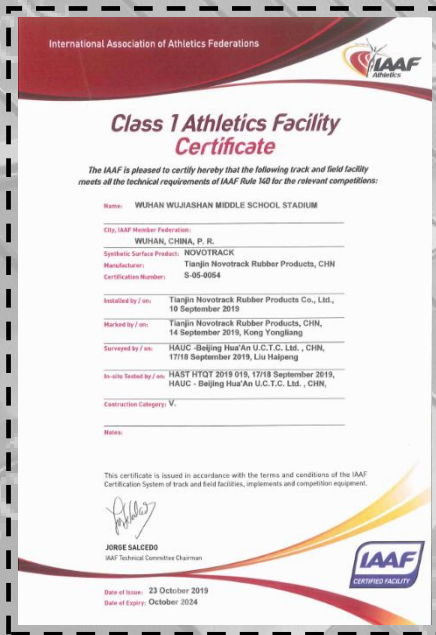

**IAAF
Class 1
Athletics
Facility
Certificate**



**Safety
management
t system**





**After-sales
service five
elements
certification**




**Child safety
and product
certification**


We specially developed these court surfaces with lychee texture grains. The product is 9m in thickness in two layers and the bottom layer is a waffle design which has better elasticity and bounce. The top wear-resisting layer further extends its durability. The multi-purpose surfaces are suitable for all kinds of training courts. The product does not contain any poisonous heavy metal or chemical staff and it is up to the environmental protection standard published by the state.

Specifications	Size
Length	15 -19 meter
Width	1.22-1.27 meter
Thickness	9 mm - 13 mm
Color:Please refer to the color card.Special color also negotiable.	

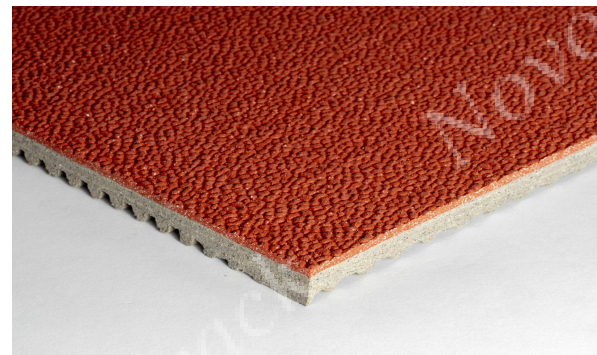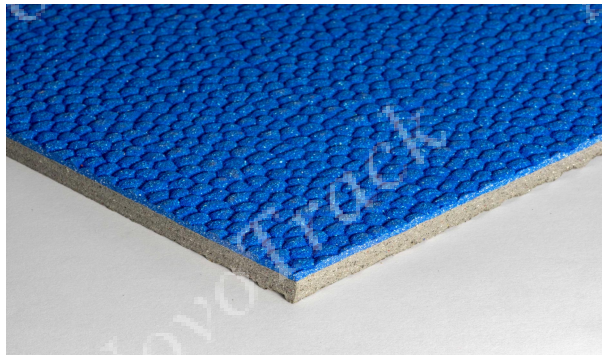

Project Cases

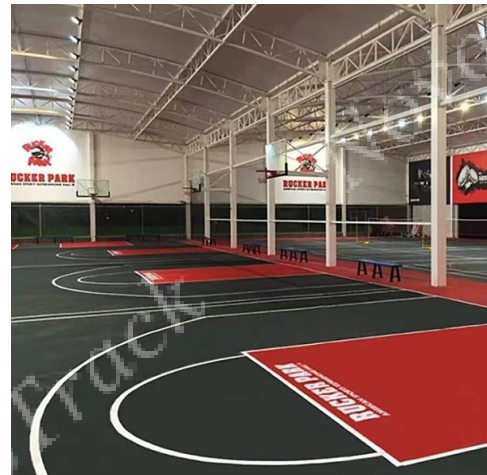

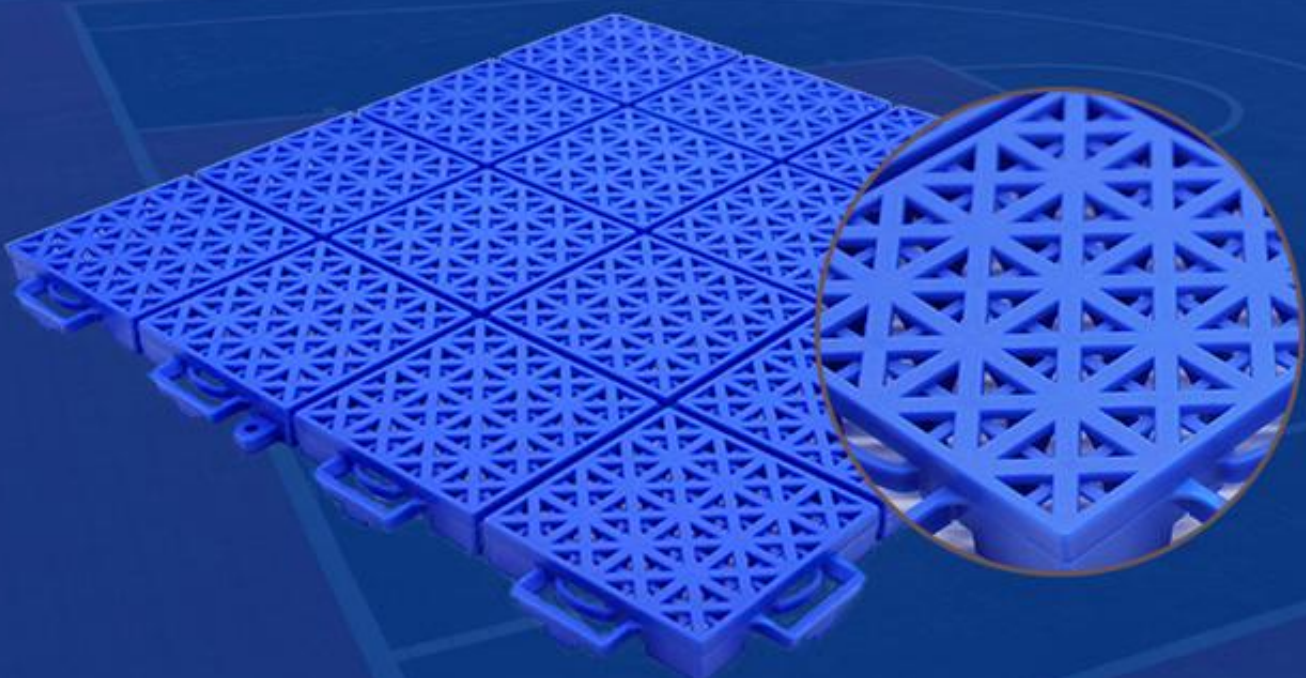

FEATURES

Protection for Athletes


Easy to Configure

Resilient Material

Smooth Playing Surface




NOVOTRACK
WWW.NOVOTRACK.LTD

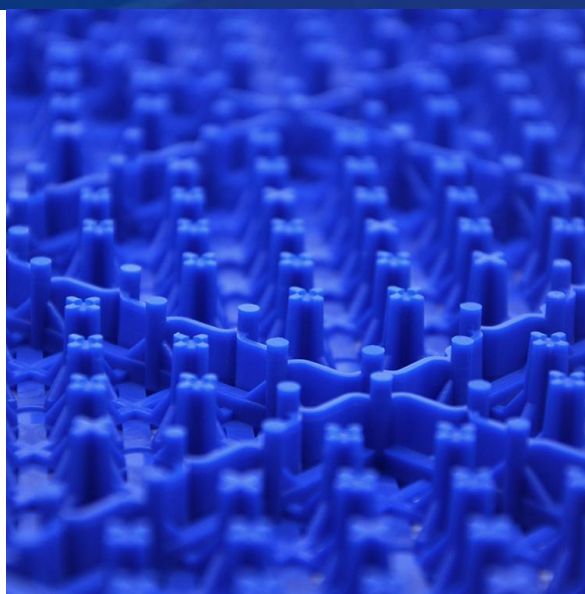

Weight	320 g
Length	340 mm
Width	340 mm
Thickness	15.8 mm

Color: Please refer to the color card. Special color also negotiable.



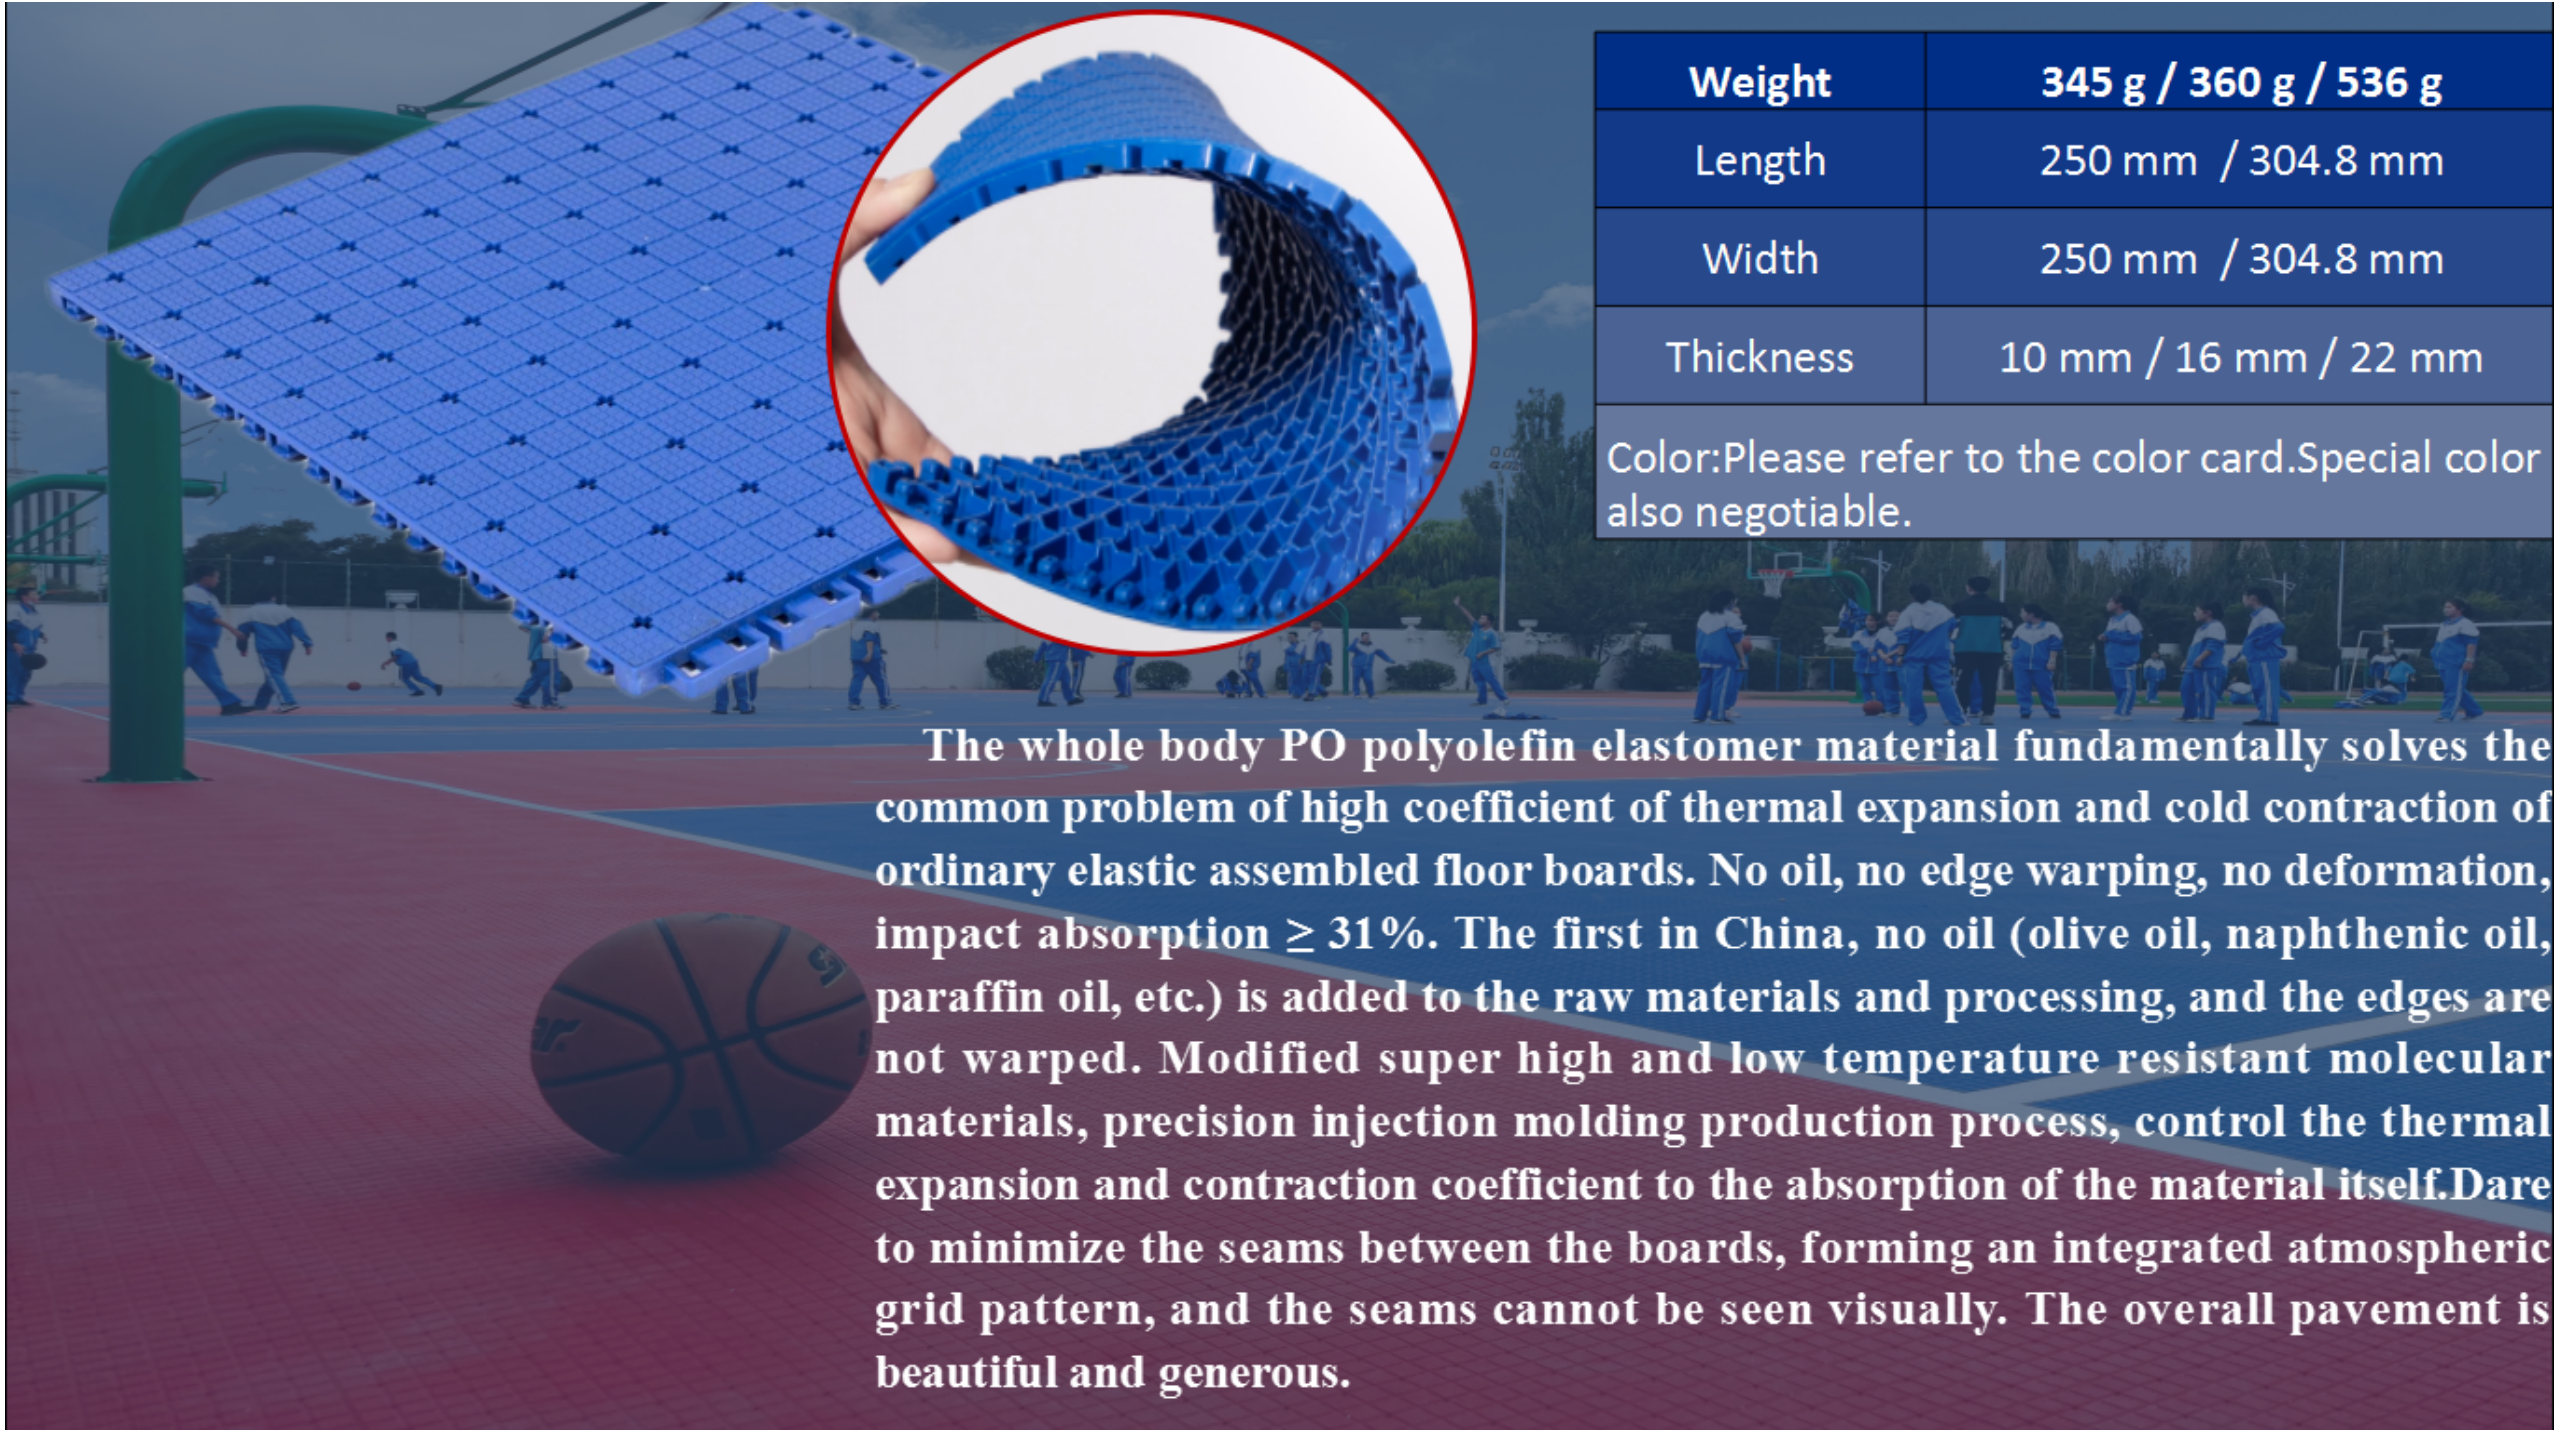


Weight	345 g / 360 g / 536 g
Length	250 mm / 304.8 mm
Width	250 mm / 304.8 mm
Thickness	10 mm / 16 mm / 22 mm

Color:Please refer to the color card.Special color also negotiable.

The whole body PO polyolefin elastomer material fundamentally solves the common problem of high coefficient of thermal expansion and cold contraction of ordinary elastic assembled floor boards. No oil, no edge warping, no deformation, impact absorption $\geq 31\%$. The first in China, no oil (olive oil, naphthenic oil, paraffin oil, etc.) is added to the raw materials and processing, and the edges are not warped. Modified super high and low temperature resistant molecular materials, precision injection molding production process, control the thermal expansion and contraction coefficient to the absorption of the material itself.Dare to minimize the seams between the boards, forming an integrated atmospheric grid pattern, and the seams cannot be seen visually. The overall pavement is beautiful and generous.

Other types

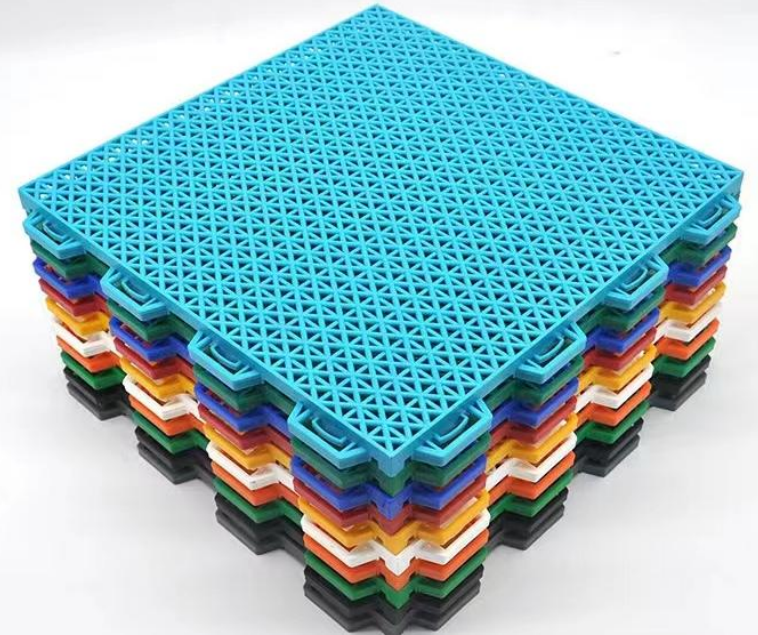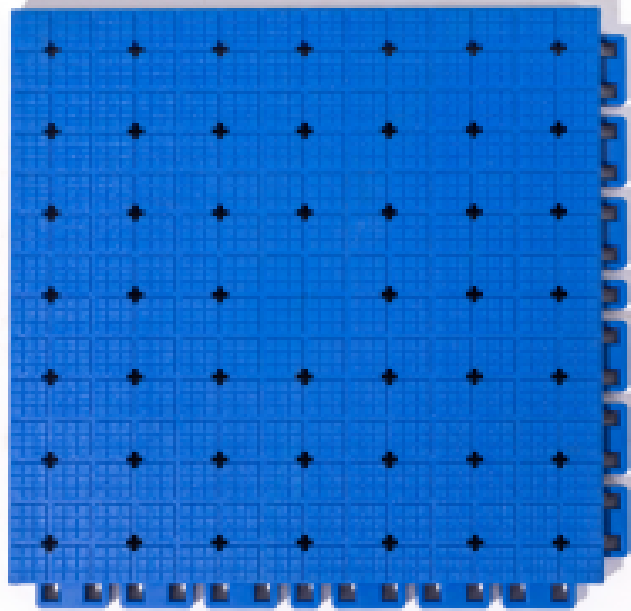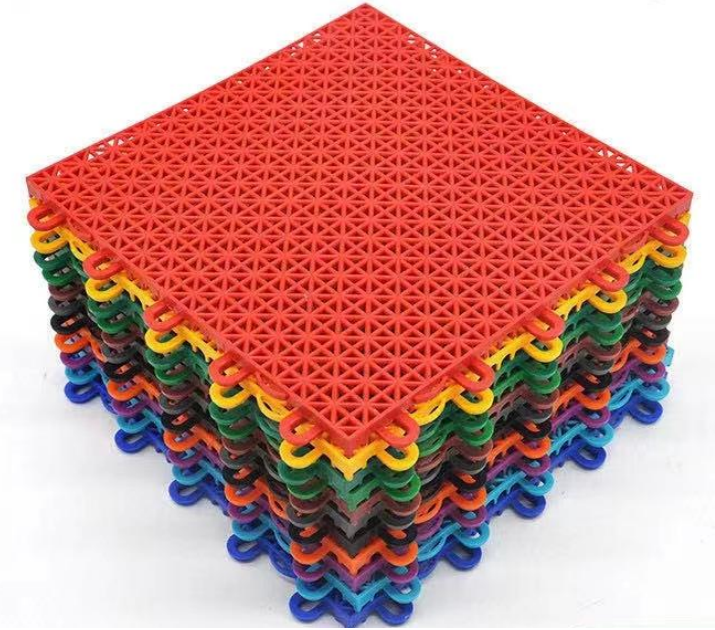



Project Cases



1.PVC Sports Plastic Floor is the best flooring materials that is widely accepted in international badminton court, basketball court, table tennis court, volleyball court, tennis court, handball court etc.

2.Comparing to hard flooring, PVC flooring has better safety, shock absorption and better rebound resilience. It is made of 100% pure PVC raw material.which is environmental protective.

Specifications	Size
Length	Customised
Width	1.5-1.8 meter
Thickness	4.5 mm - 8 mm
Color:Please refer to the color card.Special color or pattern also negotiable.	

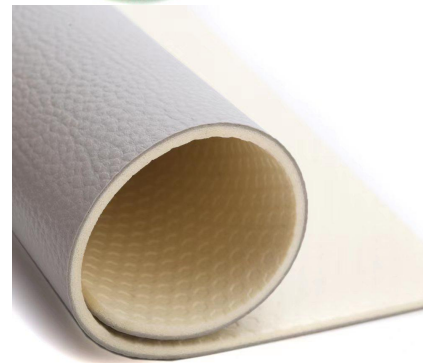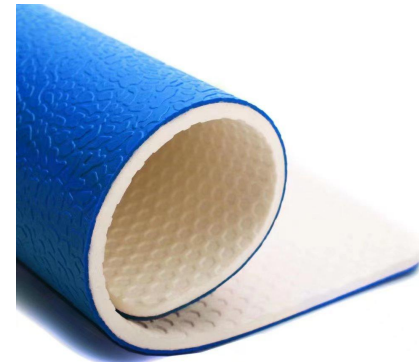

Project Cases



Tianjin NovoTrack Rubber Products Co.,Ltd.



Add:No.1-2 Shuigaozhuang Industrial Area,Xinkou,Xiqing District,Tianjin,China P.C.300380

Tel: +86 15522132293

Whatsapp:0086 15522132293

Wechat:RuthGuo520

E-mail:info@novotrack.com.cn | novotrack@tjnovotrack.cn

Website:https://www.novotrack.ltd

THANK YOU !