

Service factor:

Table 1				Driven machine factor				f1			
Driven equipment		Daily operating time with load(hour)		Driven equipment		Daily operating time with load(hour)					
								≤ 2	> 2-10	> 10	
Sewage treatment				Conveying machine							
Concentrator(Central Transmission)		-		Bucket conveyor		-			1.4	1.5	
Compressed filter		1.0		Winch		1.4			1.6	1.6	
Flocculator		0.8		Hoist		-			1.5	1.8	
Aerator		-		Belt conveyor≤150kW		1.0			1.2	1.3	
Collector		1.0		Belt conveyor≥150kW		1.1			1.3	1.4	
Vertical,rotary group				Elevators for goods*		-			1.2	1.5	
Blended collector		1.0		Elevators for customers*		-			1.5	1.8	
Concentrator		-		Scraper conveyor		-			1.2	1.5	
Screw pump		-		Automatic ladder		1.0			1.2	1.4	
Water wheel machine		-		Rail traveling mechanism		-			1.5	-	
Pump				Various frequency device		-			1.8	2.0	
Centrifugal pump		1.0		Reciprocating compressor		-			1.8	1.9	
Volume-down pump		1.3		Hoisting mechanism**							
1Piston		1.2		Rotary mechanism*					1.4	1.8	
>1Piston				Pitching mechanism					1.1	1.4	
Dredge				Traveling mechanism					1.6	2.0	
Bucket conveyor		-		Lifting mechanism					1.1	1.4	
Unloading device		-		Jibcrane					1.2	1.6	
Carterpillar traveling mechanism		1.2		Cooling tower							
Bucket digger				Cooling tower fan		-			-	2.0	
Be used for picking up		-		Fan (Shaft flow and centrifugal type)		-			1.4	1.5	
Be used for rough materials		-		Food industry							
Chopper		-		Sugar production							
Traveling mechanism*		-		Sugar-cane cutter*		-			-	1.7	
Plate blender		-		Sugar crane mill		-			-	1.7	
		1.0		Beet sugar production		-			-	1.2	
Chemical industry				Beet masher		-			-	1.4	
Extruder		-		Squeeze machine, mechanical refrigerator, cooking machine		-			-	1.5	
Paste mixer		-		Beet cleaner		-			-	1.5	
Rubber calendar		-		Beet chopper		-			-	1.5	
Cooling cylinder		-		Paper-making machinery							
Material mixer,be used for				Various kinds***		-			1.8	2.0	
Uniform medium		1.0		Pulper driving device					Supply goods according to customer requirements		
Non-uniform medium		1.4		Centrifugal compressor		-			1.4	1.5	
Blender,be used for				Rope way cable car							
Uniform density medium		1.0		Delivery ropeway		-			1.3	1.4	
Un-uniformed medium		1.2		Cableway of shuttle system		-			1.6	1.8	
Un-uniformed gas absorption		1.4		T rod elevator		-			1.3	1.4	
Oven		1.0		Continuous cableway		-			1.4	1.6	
Centrifugal machine		1.0		Cement industry							
Metal processing equipment				Concrete blender		-			1.5	1.5	
Plate turnover		1.0		Crusher*		-			1.2	1.4	
Steel pushing device		1.0		Rotary kiln		-			-	2.0	
Winding machine		-		Tube mill		-			-	2.0	
Cooling bed transverse frame		-		Powder concentrator		-			1.6	1.6	
Roller leveler		-		Roller press		-			-	2.0	
Roller path											
Continuous		-									
Interval		-									
Reversing mill		-									
Cutter											
Continuous*		-									
Crank type*		1.0									
Continuous casting driving device		-									
Rolling mill											
Reversing cogging mill		-									
Reversing plate slab mill		-									
Reversing wire mill		-									
Reversing thin plate mill		-									
Reversing middle thickness plate mill		-									
Roll gap adjusting and driving device		0.9									

Table 1				Driven machine factor				f ₁
Driven equipment	Daily running time with load(hour)			Driven equipment	Daily running time with load(hour)			
	≤ 2	> 2-10	> 10		≤ 2	> 2-10	> 10	
Wood industry				Plastics industry				
Barking machine				Miller, compound grinding				
Feed drive	1.25	1.25	1.50	Coating, film	1.25	1.25	1.25	
Main drive	1.75	1.75	1.75	Conveying pipe, Pulling rod, thin type				
Conveyor				Pipe type, Pile drawer	1.25	1.25	1.50	
Burner, repeating saw	1.25	1.25	1.50	Continuous mixer, Calender	1.50	1.50	1.50	
Rotary tower, transit transport	1.50	1.50	1.50	Blow film, to plasticizing				
Main loading, heavy loading	1.75	1.75	2.00	Batch mixer	1.75	1.75	1.75	
Main original wood, land base				Rubber industry				
Conveying chain				Continuous strong inner mixer, Mix roller,				
Floor	1.50	1.50	1.50	Batch feeding mixer (except for double sticks)	1.50	1.50	1.50	
Green-wood	1.50	1.50	1.75	Refiner, calender				
Cutting Chain				Double roller clamp feeding and mixed miller	1.25	1.25	1.50	
Saw transmission, traction	1.50	1.50	1.75	Batch strong inner mixer,				
Peeling barrel	1.75	1.75	2.00	Double stick single groove grain stick	1.75	1.75	1.75	
Feed drive				Miller heater, double sticks				
Edging, wood trimmer	1.25	1.25	1.50	Batch feeding mixer				
Planer feed, assorting table,				Wave stick miller	2.00	2.00	2.00	
Automatic incline lifting	1.75	1.75	1.75	Generator and exciter	1.00	1.00	1.25	
Multi-shaft feed, raw wood					1.75	1.75	2.00	
Transportation and rotation				Hammer crusher				
Transportation				Sand miller	1.25	1.25	1.50	
Charging tray								
Plywood lathe drive	1.50	1.50	1.75					
Conveying chain, Lifting								

⚠ Note: Determine required power P₂ of the driven equipment:
 *)Determine rated power according to maximum torque.
 **)It's necessary to check thermal capacity.


Prime mover factor

Table 2 Factor for prime mover	f ₂
Electric motors, hydraulic motors, turbines	1.0
Piston engines 4-6 cylinders	1.25
Piston engines 1-3 cylinders	1.5


Table 3 Start factor	f ₃			
f ₃ \ f ₁ × f ₂	1	1.25 -1.75	2- 2.75	≥ 3
Starts per hour				
≤ 5	1	1	1	1
6-25	1.2	1.12	1.06	1
26-60	1.3	1.2	1.12	1.06
61-180	1.5	1.3	1.2	1.12
> 180	1.7	1.5	1.3	1.2




K series gear units are available in the following designs:

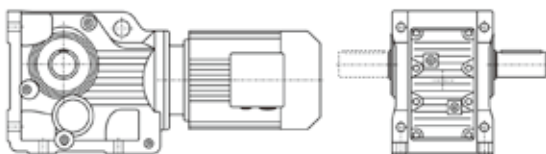


K...Y..
Foot-mounted solid shaft helical bevel gear units



KAB...Y..
Foot-mounted hollow shaft helical bevel gear units

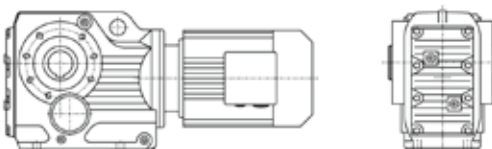


KA...Y..
Hollow shaft helical bevel gear units

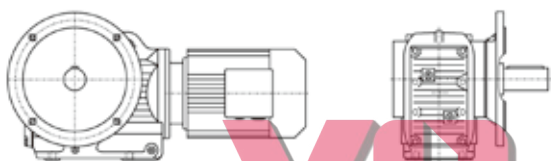


KF...Y..
Flanged-mounted solid shaft helical bevel units




KAF...Y..
Flange-mounted hollow shaft helical bevel gear units

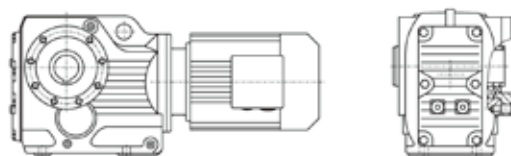


KAZ...Y..
Short-flange-mounted hollow shaft helical bevel gear units

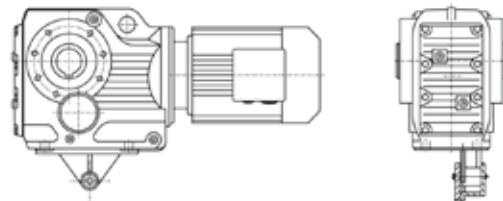


KAT...Y..
Torque-arm-mounted hollow shaft helical bevel gear units

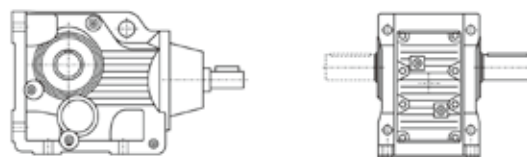

K (KF, KA, KAF, KAB, KAZ) S...
Helical bevel gear units with solid shaft input

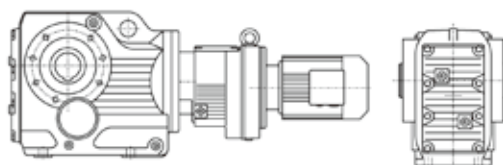

KA (K, KF, KAF, KAB, KAZ) ...R...Y..
Combi-type helical bevel gear units

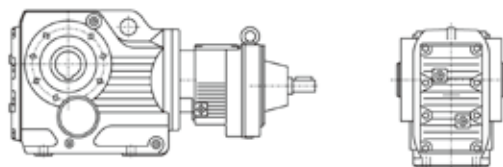


KA (K, KF, KAF, KAB, KAZ) S...R...
Combi-type helical bevel gear units with solid shaft input



KA (K, KF, KAF, KAB, KAZ) ...Y..
Customers provide the motor by themselves need connected flange.

Type Designations:

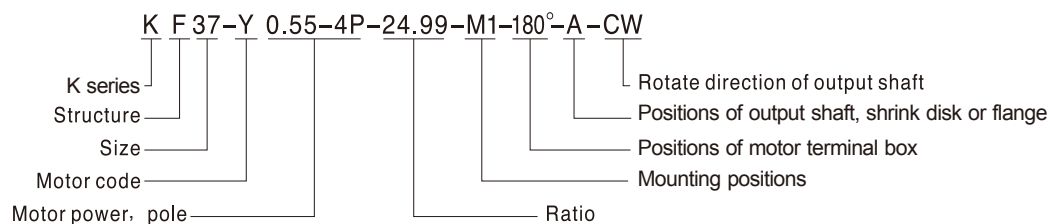

K series:
Helical bevel gear units

Structure:

Foot-mounted solid shaft	(-)
Hollow shaft	A
Flange-mounted solid shaft	F
Flange-mounted hollow shaft	AF
Short-flange-mounted hollow shaft	AZ
Foot-mounted hollow shaft	AB
Torque-arm-mounted hollow shaft	AT
Foot-mounted solid shaft with solid shaft input	S
Hollow shaft with solid shaft input	AS
Flange-mounted solid shaft with solid shaft input	FS
Flange-mounted hollow shaft with solid shaft input	AFS
Hollow shaft with shrink disk	H..(H, HF, HZ, HT)

Size:
(see selection table)

Motor code:

Common motor	Y(Y2)
Flameproof motor	B
Direct current motor	Z
Brake motor	YEJ
Multi-speed motor	D
Variable frequency motor	YVP
Electromagnetic variable speed motor	YCT
Metallurgy hoisting motor	R
Transduction braking motor	YVPJ
Roller way	G

Motor power, pole :
See selection table

Ratio:
See selection table

Mounting positions:
M1, M2, M3, M4, M5, M6(See page 03)

Positions of motor terminal box:
0°, 90°, 180°, 270°(See page 03)


Output shaft \ flange \ shrink disc directions:
Viewing from motor end: left side = A, right side = B,
both side = AB(See mounting positions)

Direction of rotation from the output shaft end:


Clockwise	CW
Counter clockwise	CCW

*Dimensions of hollow shaft with shrink disc, see page 40-41.

Mounting positions

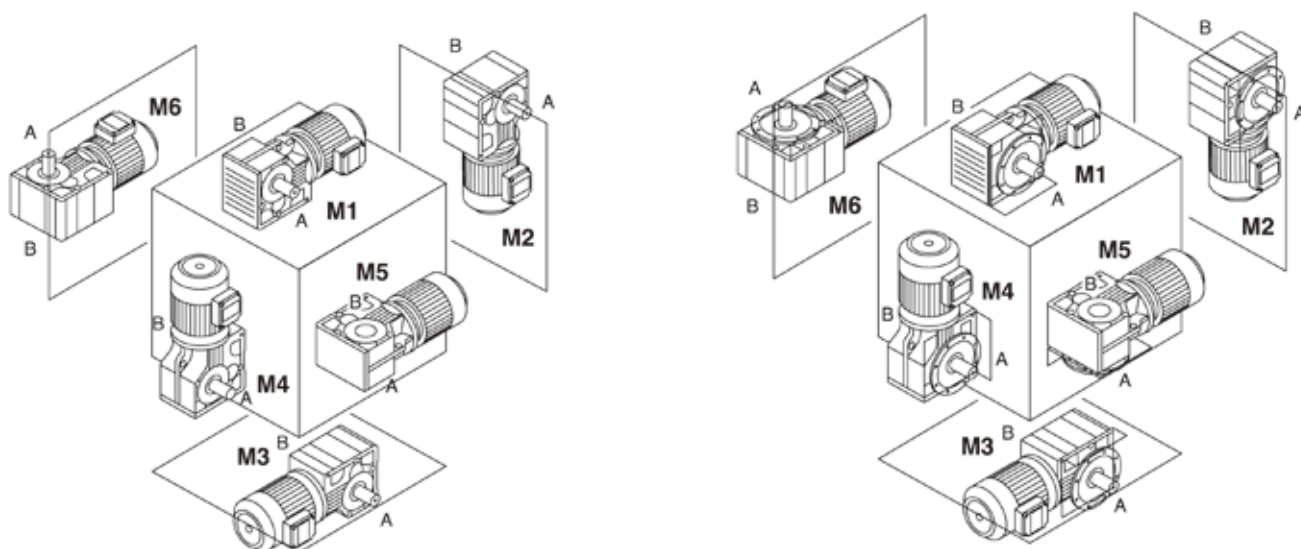


Positions of motor terminal box:



0°



90°



180°



270°

Input power rating and permissible torque

Size	37	47	57	67	77	87	97	107	127	157	167	187
Structure	K KA KF KAF KAZ KAT KAB											
Input power rating(kw)	0.18~3.0	0.18~3.0	0.18~5.5	0.18~5.5	0.37~11	0.75~22	1.1~30	3~45	7.5~90	11~160	11~200	18.5~200
Ratio	5.36~106.38	5.81~131.87	6.57~145.14	7.14~144.79	7.24~192.18	7.19~197.37	8.95~176.05	8.74~141.46	8.68~146.07	12.65~150.41	17.28~163.91	17.27~180.78
Permissible torque (n·m)	200	400	600	820	1550	2700	4300	8000	13000	18000	32000	50000

Gear unit weight

Size	37	47	57	67	77	87	97	107	127	157	167	187
Weight (kgs)	11	20	27	33	57	85	130	250	380	610	1015	1700

The marked weight is average value, it has no constraint force.

Oil

K...,KAB...:

Size	Oil level(L)					
	M1	M2	M3	M4	M5	M6
K..37	0.5	1	1	1.3	1	1
K..47	0.8	1.3	1.5	2	1.6	1.6
K..57	1.2	2.3	2.5	3	2.6	2.4
K..67	1.1	2.4	2.6	3.4	2.6	2.6
K..77	2.2	4.1	4.4	5.9	4.2	4.4
K..87	3.7	8	8.7	10.9	7.8	8
K..97	7	14	15.7	20	15.7	15.5
K..107	10	21	25.5	33.5	24	24
K..127	21	41.5	44	54	40	41
K..157	31	62	65	90	58	62
K..167	35	100	100	125	85	85
K..187	60	170	170	205	130	130

KF...:

Size	Oil level(L)					
	M1	M2	M3	M4	M5	M6
KF37	0.5	1.1	1.1	1.5	1	1
KF47	0.8	1.3	1.7	2.2	1.6	1.6
KF57	1.3	2.3	2.7	3	2.9	2.7
KF67	1.1	2.4	2.8	3.6	2.7	2.7
KF77	2.1	4.1	4.4	6	4.5	4.5
KF87	3.7	8.2	9	11.9	8.4	8.4
KF97	7	14.7	17.3	21.5	15.7	16.5
KF107	10	22	26	35	25	25
KF127	21	41.5	46	55	41	41
KF157	31	66	69	92	62	62

KA..., KAF..., KAZ...:

Size	Oil level(L)					
	M1	M2	M3	M4	M5	M6
K..37	0.5	1	1	1.4	1	1
K..47	0.8	1.3	1.6	2.1	1.6	1.6
K..57	1.3	2.3	2.7	3	2.9	2.7
K..67	1.1	2.4	2.7	3.6	2.6	2.6
K..77	2.1	4.1	4.6	6	4.4	4.4
K..87	3.7	8.2	8.8	11.1	8	8
K..97	7	14.7	15.7	20	15.7	15.7
K..107	10	20.5	24	32	24	24
K..127	21	41.5	43	52	40	40
K..157	31	66	67	87	62	62
KA..167	35	100	100	125	85	85
KA..187	60	170	170	205	130	130

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
0.18kW						0.18kW					
0.09	16482	14975	0.74			1.5	994	903	0.78		
0.11	13692	12440	0.89			1.8	873	793	0.88		
0.13	12013	10914	1.0			2.0	767	697	1.0		
0.14	10807	9819	1.1			2.3	675	613	1.1	K 67R37	4
0.16	9293	8443	1.3	K 127R77	4	2.6	597	542	1.3	KF 67R37	4
0.19	8236	7483	1.5	KF 127R77	4	3.0	518	471	1.5	KA 67R37	4
0.21	7226	6565	1.7	KA 127R77	4	3.3	462	420	1.7	KAF67R37	4
0.24	6388	5804	1.9	KAF127R77	4	3.9	397	361	1.9		
0.28	5533	5027	2.2			4.3	356	323	2.2		
0.31	4868	4423	2.5			5.1	299	272	2.6		
0.37	4184	3801	2.9								
0.43	3563	3237	3.4								
0.17	9037	8211	0.8			2.3	677	615	0.8		
0.19	7888	7167	1.0			2.6	599	544	0.9		
0.23	6711	6097	1.1			2.9	521	473	1.1		
0.25	6144	5582	1.2			3.3	463	421	1.2		
0.27	5575	5065	1.3	K 107R77	4	3.8	398	362	1.4	K 57R37	4
0.32	4732	4299	1.6	KF 107R77	4	4.4	351	319	1.6	KF 57R37	4
0.37	4135	3757	1.8	KA 107R77	4	5.1	300	273	1.9	KA 57R37	4
0.43	3562	3236	2.1	KAF107R77	4	5.8	264	240	2.1	KAF57R37	4
0.48	3158	2869	2.4			6.5	237	215	2.4		
0.56	2756	2504	2.7			7.2	211	192	2.7		
0.63	2425	2203	3.1			8.4	183	166	3.1		
0.30	5139	4669	0.79			3.7	413	375	0.9		
0.34	4493	4082	0.90			4.3	359	326	1.0		
0.39	3944	3583	1.0			4.8	318	289	1.2	K 47R37	4
0.45	3421	3108	1.2			5.6	275	250	1.4	KF 47R37	4
0.50	3035	2757	1.3			6.2	248	225	1.5	KA 47R37	4
0.57	2662	2419	1.5			7.0	218	198	1.7	KAF47R37	4
0.65	2337	2123	1.7	K 97R57	4	8.3	184	167	2.0		
0.75	2043	1856	2.0	KF 97R57	4	9.3	164	149	2.3		
0.86	1789	1625	2.3	KA 97R57	4	11	141	128	2.7		
0.97	1574	1430	2.6	KAF97R57	4						
1.1	1388	1261	2.9			6.8	226	205	0.83	K 37R17	4
1.3	1213	1102	3.3			7.7	199	181	0.94	KF 37R17	4
1.5	1053	957	3.8			8.7	176	160	1.07	KA 37R17	4
1.6	941	855	4.3			10	150	136	1.26	KAF37R17	4
1.9	818	743	4.9			11	140	127	1.34		
2.1	717	651	5.6			5.9	275	144.79	2.8	K 67	6
						6.9	235	123.54	3.3	KF 67	6
						7.9	205	108.03	3.8	KA 67	6
						8.3	195	102.62	4.0	KAF67	6
0.45	3420	3107	0.74								
0.51	3003	2728	0.85								
0.59	2610	2371	0.97			9.6	168	144.79	4.6	K 67	4
0.67	2298	2088	1.1			11	144	123.54	5.4	KF 67	4
0.75	2041	1854	1.2	K 87R57	4	13	126	108.03	6.1	KA 67	4
0.84	1825	1658	1.4	KF 87R57	4						
1.0	1557	1415	1.6	KA 87R57	4						
1.1	1353	1229	1.9	KAF87R57	4	5.9	276	145.14	2.0	K 57	6
1.3	1187	1078	2.1			6.9	235	123.85	2.4	KF 57	6
1.5	1047	951	2.4			7.8	206	108.29	2.7	KA 57	6
1.7	921	837	2.8			8.3	196	102.88	2.9	KAF57	6
1.9	799	726	3.2			9.4	172	90.26	3.3		
0.9	1666	1514	0.9			9.6	169	145.14	3.3		
1.0	1528	1388	1.0			11	144	123.85	3.9	K 57	4
1.1	1341	1218	1.1			13	126	108.29	4.5	KF 57	4
1.3	1159	1053	1.3	K 77R37	4	14	120	102.88	4.7	KA 57	4
1.5	1017	924	1.4	KF 77R37	4	15	105	90.26	5.4	KAF57	4
1.7	897	815	1.6	KA 77R37	4	18	89	76.56	6.3		
2.0	780	709	1.9	KAF77R37	4						
2.2	685	622	2.1			6.4	251	131.87	1.50	K 47	6
2.5	608	552	2.4			7.0	231	121.48	1.63	KF 47	6
2.9	534	485	2.7			8.1	198	104.37	1.90	KA 47	6
3.2	471	428	3.1			9.4	173	90.86	2.2	KAF47	6
3.8	404	367	3.6			10	162	85.12	2.3		

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p
0.18kW						0.25kW					
11	153	131.87	2.5	K 47	4	0.86	2484	1625	1.6		
12	141	121.48	2.7	KF 47	4	1.0	2186	1430	1.8	K 97R57	4
13	121	104.37	3.1	KA 47	4	1.1	1928	1261	2.1	KF 97R57	4
15	106	90.86	3.6	KAF47	4	1.3	1685	1102	2.4	KA 97R57	4
16	99	85.12	3.8			1.5	1463	957	2.8	KAF97R57	4
						1.6	1307	855	3.1		
8.0	202	106.38	0.93	K 37	6	0.7	3192	2088	0.80		
8.7	186	97.81	1.01	KF 37	6	0.7	2834	1854	0.90		
10	159	83.69	1.18	KA 37	6	0.8	2535	1658	1.0	K 87R57	4
12	138	72.54	1.36	KAF37	6	1.0	2163	1415	1.2	KF 87R57	4
13	124	106.38	1.52			1.1	1879	1229	1.4	KA 87R57	4
14	114	97.81	1.65			1.3	1648	1078	1.5	KAF87R57	4
17	97	83.69	1.93			1.5	1454	951	1.7		
19	84	72.54	2.2			1.7	1280	837	2.0		
21	79	67.80	2.4			1.9	1110	726	2.3		
24	68	58.60	2.8			2.2	975	638	2.6		
28	58	49.79	3.2								
31	52	44.46	3.6			1.3	1610	1053	0.9		
37	44	37.97	4.3			1.5	1413	924	1.0		
39	41	35.57	4.5	K 37	4	1.7	1246	815	1.2		
46	35	29.96	5.4	KF 37	4	2.0	1084	709	1.3		
48	34	28.83	5.6	KA 37	4	2.2	951	622	1.5		
56	29	24.99	6.5	KAF37	4	2.5	844	552	1.7	K 77R37	4
60	27	23.36	6.7			2.9	741	485	2.0	KF 77R37	4
69	23	20.19	7.4			3.2	654	428	2.2	KA 77R37	4
81	20	17.15	8.5			3.9	547	358	2.7	KAF77R37	4
91	18	15.31	9.2			4.3	489	320	3.0		
106	15	13.08	10			4.9	433	283	3.4		
114	14	12.14	11			5.7	376	246	3.9		
133	12	10.49	12			6.4	330	216	4.4		
156	10	8.91	15			7.3	292	191	5.0		
175	9	7.96	16			8.2	260	170	5.6		
0.25kW						2.3	937	613	0.8		
0.14	15010	9819	0.81			2.6	829	542	0.9		
0.16	12907	8443	0.95			3.0	720	471	1.1	K 67R37	4
0.19	11438	7482	1.07	K 127R77	4	3.3	642	420	1.2	KF 67R37	4
0.21	10036	6565	1.2	KF 127R77	4	3.9	552	361	1.4	KA 67R37	4
0.24	8872	5804	1.4	KA 127R77	4	4.3	494	323	1.6	KAF67R37	4
0.28	7685	5027	1.6	KAF127R77	4	5.1	416	272	1.9		
0.31	6761	4423	1.8			5.8	367	240	2.1		
0.37	5811	3801	2.1			6.4	332	217	2.3		
0.43	4948	3237	2.5								
0.23	9320	6097	0.81			3.3	644	421	0.9		
0.25	8533	5582	0.88			3.8	553	362	1.0		
0.27	7743	5065	1.0			4.4	488	319	1.2		
0.32	6572	4299	1.1			5.1	417	273	1.4		
0.37	5743	3757	1.3			5.8	367	240	1.5	K 57R37	4
0.43	4947	3236	1.5	K 107R77	4	6.5	329	215	1.7	KF 57R37	4
0.48	4386	2869	1.7	KF 107R77	4	7.2	294	192	1.9	KA 57R37	4
0.56	3828	2504	2.0	KA 107R77	4	8.4	254	166	2.2	KAF57R37	4
0.63	3368	2203	2.2	KAF107R77	4	9.9	216	141	2.6		
0.74	2857	1869	2.6			11	193	126	2.9		
0.82	2582	1689	2.9			13	165	108	3.4		
0.91	2343	1533	3.2			15	145	95	3.9		
1.06	2013	1317	3.7								
0.45	4751	3108	0.9	K 97R57	4	4.2	536	154.02	2.7	K 77	8
0.50	4215	2757	1.0	KF 97R57	4	4.8	471	135.28	3.1	KF 77	8
0.57	3698	2419	1.1	KA 97R57	4	5.0	447	128.52	3.3	KA 77	8
0.65	3245	2123	1.2	KAF97R57	4	5.7	395	113.56	3.7	KAF77	8
0.75	2837	1856	1.4								
						4.4	507	192.18	2.9	K 77	6
						4.7	474	179.37	3.1	KF 77	6
						5.5	407	154.02	3.6	KA 77	6
						6.3	357	135.28	4.1	KAF77	6

Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f _B	Type Type	Pole p
0.25kW						0.37kW					
5.2	430	123.54	1.8	K 67	8	0.19	16930	7483	0.72		
6.0	376	108.03	2.1	KF 67	8	0.21	14853	6565	0.82		
6.3	357	102.62	2.2	KA 67	8	0.24	13131	5804	0.93	K 127R77	4
7.2	313	90.04	2.5	KAF67	8	0.28	11373	5027	1.07	KF 127R77	4
						0.31	10007	4423	1.22	KA 127R77	4
5.9	382	144.79	2.0	K 67	6	0.37	8600	3801	1.42	KAF127R77	4
6.9	326	123.54	2.4	KF 67	6	0.43	7324	3237	1.67		
7.9	285	108.03	2.7	KA 67	6	0.72	4357	1926	2.80		
8.3	271	102.62	2.8	KAF67	6	0.79	3975	1757	3.07		
						0.90	3486	1541	3.51		
9.6	234	144.79	3.3	K 67	4	0.37	8500	3757	0.88		
11	199	123.54	3.9	KF 67	4	0.43	7321	3236	1.03		
13	174	108.03	4.4	KA 67	4	0.48	6491	2869	1.16		
14	166	102.62	4.7	KAF67	4	0.56	5665	2504	1.33	K 107R77	4
5.9	383	145.14	1.5	K 57	6	0.63	4984	2203	1.51	KF 107R77	4
6.9	327	123.85	1.7	KF 57	6	0.74	4229	1869	1.78	KA 107R77	4
7.8	286	108.29	2.0	KA 57	6	0.82	3821	1689	1.97	KAF107R77	4
8.3	272	102.88	2.1	KAF57	6	0.91	3468	1533	2.2		
9.4	238	90.26	2.4			1.06	2980	1317	2.5		
11	202	76.56	2.8			1.21	2602	1150	2.9		
9.6	234	145.14	2.4			0.65	4803	2123	0.84		
11	200	123.85	2.8	K 57	4	0.75	4199	1856	0.96		
13	175	108.29	3.2	KF 57	4	0.86	3676	1625	1.10		
14	166	102.88	3.4	KA 57	4	0.97	3235	1430	1.25	K 97R57	4
15	146	90.26	3.9	KAF57	4	1.1	2853	1261	1.42	KF 97R57	4
18	124	76.56	4.6			1.3	2493	1102	1.62	KA 97R57	4
6.4	348	131.87	1.08	K 47	6	1.5	2165	957	1.87	KAF97R57	4
7.0	321	121.48	1.17	KF 47	6	1.6	1934	855	2.1		
8.1	276	104.37	1.36	KA 47	6	1.9	1681	743	2.4		
9.4	240	90.86	1.57	KAF47	6	2.1	1473	651	2.7		
10	225	85.12	1.67			2.4	1296	573	3.1		
11	213	131.87	1.77	K 47	4	1.0	3201	1415	0.79		
11	196	121.48	1.92	KF 47	4	1.1	2781	1229	0.91		
13	169	104.37	2.2	KA 47	4	1.3	2439	1078	1.04		
15	147	90.86	2.6	KAF47	4	1.5	2152	951	1.18	K 87R57	4
16	137	85.12	2.7			1.7	1894	837	1.34	KF 87R57	4
10	221	83.69	0.9	K 37	6	1.9	1643	726	1.55	KA 87R57	4
12	192	72.54	1.0	KF 37	6	2.2	1443	638	1.76	KAF87R57	4
13	179	67.80	1.1	KA 37	6	2.5	1272	562	2.0		
15	155	58.60	1.2	KAF37	6	2.9	1072	474	2.4		
17	131	49.79	1.4			3.3	964	426	2.6		
						3.7	844	373	3.0		
13	172	106.38	1.1			1.7	1844	815	0.79		
14	158	97.81	1.2			2.0	1604	709	0.91		
17	135	83.69	1.4			2.2	1407	622	1.04		
19	117	72.54	1.6			2.5	1249	552	1.17	K 77R37	4
21	109	67.80	1.7			2.9	1097	485	1.33	KF 77R37	4
24	95	58.60	2.0			3.2	968	428	1.50	KA 77R37	4
28	80	49.79	2.3			3.9	810	358	1.80	KAF77R37	4
31	72	44.46	2.6			4.3	724	320	2.0		
37	61	37.97	3.1			4.9	640	283	2.3		
39	57	35.57	3.3	K 37	4	5.7	557	246	2.6		
46	48	29.96	3.9	KF 37	4	6.4	489	216	3.0		
48	47	28.83	4.0	KA 37	4	7.3	432	191	3.4		
56	40	24.99	4.7	KAF37	4	8.2	385	170	3.8		
60	38	23.36	4.9			9.3	339	150	4.3		
69	33	20.19	5.3			3.3	950	420	0.81		
81	28	17.15	6.1			3.9	817	361	0.94		
91	25	15.31	6.7			4.3	731	323	1.05	K 67R37	4
106	21	13.08	7.3			5.1	615	272	1.25	KF 67R37	4
114	20	12.14	7.7			5.8	543	240	1.42	KA 67R37	4
133	17	10.49	8.9			6.4	491	217	1.57	KAF67R37	4
156	14	8.91	10			7.3	432	191	1.78		
175	13	7.96	11			8.4	376	166	2.05		
204	11	6.80	13			9.7	326	144	2.37		
218	10	6.37	13			12	269	119	2.86		

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p
0.37kW						0.37kW					
5.1	618	273	0.91	K 57R37 KF 57R37 KA 57R37 KAF57R37	4	8.5	392	104.37	0.96	K 47	6
5.8	543	240	1.04			9.7	341	90.86	1.10	KF 47	6
6.5	486	215	1.16			10	319	85.12	1.18	KA 47	6
7.2	434	192	1.30			12	282	75.2	1.33	KAF47	6
8.4	376	166	1.50			11 315 131.87 1.19 12 290 121.48 1.30 13 249 104.37 1.51 15 217 90.86 1.73 16 203 85.12 1.85 18 180 75.20 2.1 20 167 69.84 2.3 22 151 63.30 2.5					
9.9	319	141	1.77								
11	285	126	1.98								
13	244	108	2.3								
15	215	95	2.6								
3.8	868	174.99	2.9	K 87	8	14 234 97.81 0.80 17 200 83.69 0.94 19 173 72.54 1.08 21 162 67.80 1.16 24 140 58.60 1.34 28 119 49.79 1.58 31 106 44.46 1.77 37 91 37.97 2.07 39 85 35.57 2.21 46 72 29.96 2.63 48 69 28.83 2.73 56 60 24.99 3.15 60 56 23.36 3.28 69 48 20.19 3.60 81 41 17.15 4.13 91 37 15.31 4.5 106 31 13.08 5.0 114 29 12.14 5.2 133 25 10.49 6.0 156 21 8.91 7.1 175 19 7.96 7.7 204 16 6.80 8.7 218 15 6.37 9.0 259 13 5.56 10					
4.1	813	164.05	3.1	KF 87	8						
4.6	729	147.09	3.5	KA 87	8						
				KAF87	8						
4.5	740	197.27	3.4	K 87	6						
5.1	657	174.99	3.9	KF 87	6						
				KA 87	6						
				KAF87	6						
5.0	671	135.28	2.2	K 77	8	K 37 4 KF 37 4 KA 37 4 KAF37 4					
5.2	637	128.52	2.3	KF 77	8						
5.9	563	113.56	2.6	KA 77	8						
6.9	481	97.05	3.0	KAF77	8						
5.7	578	154.02	2.5	K 77	6						
6.5	508	135.28	2.9	KF 77	6						
6.9	482	128.52	3.0	KA 77	6						
7.8	426	113.56	3.4	KAF77	6						
7.23	459	192.18	3.2	K 77	4	0.08 57099 16978 0.82 0.10 47998 14272 0.98 0.11 44111 13116 1.07 0.12 39170 11647 1.20 0.19 24662 7333 1.9					
7.75	429	179.37	3.4	KF 77	4						
9.02	368	154.02	4.0	KA 77	4						
				KAF77	4						
6.2	536	108.03	1.44	K 67	8						
6.5	509	102.62	1.52	KF 67	8						
7.4	446	90.04	1.73	KA 67	8						
				KAF67	8						
7.2	464	123.54	1.66	K 67	6	0.12 38783 11532 0.78 0.14 34395 10227 0.87 0.16 28913 8597 1.04 0.21 21988 6538 1.37 0.26 18046 5366 1.67 0.34 13651 4059 2.2					
8.2	405	108.03	1.90	KF 67	6						
8.6	385	102.62	2.0	KA 67	6						
9.8	338	90.04	2.3	KAF67	6						
9.6	346	144.79	2.2	K 67	4						
11	295	123.54	2.6	KF 67	4						
13	258	108.03	3.0	KA 67	4						
15	215	90.04	3.6	KAF67	4						
18	182	76.37	4.2		4	0.20 23142 6881 0.73 0.23 19947 5931 0.85 0.35 13365 3974 1.27 0.46 10247 3047 1.65					
7.1	465	123.85	1.2	K 57	6						
8.2	406	108.29	1.4	KF 57	6						
8.6	386	102.88	1.5	KA 57	6						
10	339	90.26	1.7	KAF57	6						
12	287	76.56	2.0		6						
13	259	69.12	2.2		6						
9.6	347	145.14	1.6	K 57	4	0.31 14875 4423 0.82 0.37 12783 3801 0.96 0.43 10886 3237 1.12 0.47 9891 2941 1.24 0.55 8569 2548 1.43 0.72 6477 1926 1.89 0.79 5909 1757 2.1 0.90 5183 1541 2.4 1.0 4513 1342 2.7 1.2 3958 1177 3.1 1.4 3447 1025 3.5					
11	296	123.85	1.9	KF 57	4						
13	259	108.29	2.2	KA 57	4						
14	246	102.88	2.3	KAF57	4						
15	216	90.26	2.6		4						
18	183	76.56	3.1		4						
20	165	69.12	3.4		4						

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p
0.55kW						0.55kW					
0.48	9649	2869	0.78	K 107R77 KF 107R77 KA 107R77 KAF107R77	4	3.8	1290	174.99	2.0	K 87	8
0.56	8421	2504	0.89			4.1	1209	164.05	2.1	KF 87	8
0.63	7409	2203	1.01			4.5	1084	147.09	2.3	KA 87	8
0.74	6286	1869	1.20							KAF87	8
0.82	5680	1689	1.32			4.5	1101	197.27	2.3	K 87	6
0.91	5156	1533	1.46			5.1	976	174.99	2.6	KF 87	6
1.1	4429	1317	1.70			5.4	915	164.05	2.8	KA 87	6
1.2	3868	1150	1.94			6.0	821	147.09	3.1	KAF87	6
1.4	3414	1015	2.2								
1.6	2929	871	2.6			6.5	755	135.28	1.9	K 77	8
1.8	2630	782	2.9	K 97R57 KF 97R57 KA 97R57 KAF97R57	4	6.9	717	128.52	2.0	KF 77	8
2.0	2307	686	3.3			7.8	634	113.56	2.3	KA 77	8
2.3	2038	606	3.7			9.1	541	97.05	2.7	KAF77	8
1.0	4809	1430	0.8			5.7	859	154.02	1.70	K 77	6
1.1	4241	1261	1.0			6.5	755	135.28	1.93	KF 77	6
1.3	3706	1102	1.1			6.9	717	128.52	2.0	KA 77	6
1.5	3218	957	1.3			7.8	634	113.56	2.3	KAF77	6
1.6	2875	855	1.4								
1.9	2499	743	1.6			9.0	547	154.02	2.7	K 77	4
2.1	2189	651	1.8			10	481	135.28	3.0	KF 77	4
2.4	1927	573	2.1			11	457	128.52	3.2	KA 77	4
2.8	1695	504	2.4			12	403	113.56	3.6	KAF77	4
3.2	1470	437	2.8	K 87R57 KF 87R57 KA 87R57 KAF87R57	4	14	345	97.05	4.2		
3.6	1285	382	3.1			7.2	689	123.54	1.12	K 67	6
4.6	1026	305	3.9			8.2	603	108.03	1.28	KF 67	6
1.5	3198	951	0.79			8.6	573	102.62	1.35	KA 67	6
1.7	2815	837	0.90			10	502	90.04	1.53	KAF67	6
1.9	2442	726	1.04			12	426	76.37	1.81		
2.2	2146	638	1.18			11	439	123.54	1.76	K 67	4
2.5	1890	562	1.34			13	384	108.03	2.0	KF 67	4
2.9	1594	474	1.59			15	320	90.04	2.4	KA 67	4
3.3	1433	426	1.77			18	271	76.37	2.8	KAF67	4
3.7	1254	373	2.0	K 77R37 KF 77R37 KA 77R37 KAF77R37	4	8.2	604	108.29	0.93		
4.2	1110	330	2.3			8.6	574	102.88	0.98	K 57	6
4.7	985	293	2.6			9.8	504	90.26	1.12	KF 57	6
5.6	841	250	3.0			12	427	76.56	1.32	KA 57	6
5.9	794	236	3.2			13	386	69.12	1.46	KAF57	6
6.9	676	201	3.8			14	339	60.81	1.66		
2.5	1856	552	0.78			15	320	57.42	1.76		
2.9	1631	485	0.89			11	440	123.85	1.28		
3.2	1439	428	1.01			13	385	108.29	1.47		
3.9	1204	358	1.21			14	365	102.88	1.54	K 57	4
4.3	1076	320	1.35			15	321	90.26	1.76	KF 57	4
4.9	952	283	1.53			18	272	76.56	2.1	KA 57	4
5.7	827	246	1.76			20	246	69.12	2.3	KAF57	4
6.4	726	216	2.0	K 67R37 KF 67R37 KA 67R37 KAF67R37	4	23	216	60.81	2.6		
7.3	642	191	2.3			24	204	57.42	2.8		
8.2	572	170	2.5			13	371	104.37	1.01		
9.3	504	150	2.9			15	323	90.86	1.17		
5.1	915	272	0.84			16	302	85.12	1.24	K 47	4
5.8	807	240	0.95			18	267	75.20	1.41	KF 47	4
6.4	730	217	1.1			20	248	69.84	1.52	KA 47	4
7.3	642	191	1.2			22	225	63.30	1.67	KAF47	4
8.4	558	166	1.4			24	202	56.83	1.86		
9.7	484	144	1.6			28	174	48.95	2.2		
12	400	119	1.9			30	164	46.03	2.3		
7.2	646	192	0.87	K 57R37 KF 57R37 KA 57R37 KAF57R37	4	24	208	58.6	0.90	K 37	4
8.4	558	166	1.0			28	177	49.79	1.06	KF 37	4
9.9	474	141	1.2			31	158	44.46	1.19	KA 37	4
11	424	126	1.3			37	135	37.97	1.39	KAF37	4
13	363	108	1.6								
15	319	95	1.8								

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p
0.55kW						0.75kW					
39	126	35.57	1.49			1.9	3329	726	0.76		
46	106	29.96	1.77			2.2	2926	638	0.87		
48	102	28.83	1.84			2.5	2577	562	0.98		
56	89	24.99	2.1	K 37	4	2.9	2174	474	1.17	K 87R57	4
60	83	23.36	2.2	KF 37	4	3.3	1954	426	1.30	KF 87R57	4
69	72	20.19	2.4	KA 37	4	3.7	1711	373	1.48	KA 87R57	4
81	61	17.15	2.8	KAF37	4	4.2	1513	330	1.68	KAF87R57	4
91	54	15.31	3.0			4.7	1344	293	1.89		
106	46	13.08	3.3			5.6	1147	250	2.2		
114	43	12.14	3.5			5.9	1082	236	2.3		
133	37	10.49	4.0			6.9	922	201	2.8		
156	32	8.91	4.8								
175	28	7.96	5.2			3.9	1642	358	0.89	K 77R37	4
204	24	6.80	5.8			4.3	1468	320	0.99	KF 77R37	4
218	23	6.37	6.0			4.9	1298	283	1.12	KA 77R37	4
259	19	5.36	6.9			5.7	1128	246	1.29	KAF77R37	4
						6.4	991	216	1.47		
0.75kW						3.9	1737	175.47	2.3	K 97	8
0.11	60151	13116	0.78			4.4	1508	152.31	2.7	KF 97	8
0.12	53414	11647	0.88	K 187R97	4	4.8	1389	140.28	2.9	KA 97	8
0.19	33630	7333	1.40	KA 187R97	4					KAF97	8
0.21	30901	6738	1.52			4.6	1456	147.09	1.7	K 87	8
0.23	27443	5984	1.71			5.4	1254	126.68	2.0	KF 87	8
						5.9	1140	115.16	2.2	KA 87	8
0.16	39426	8597	0.76	K 167R97	4	6.6	1017	102.71	2.5	KAF87	8
0.21	29984	6538	1.00	KA 167R97	4						
0.26	24609	5366	1.22			5.2	1295	174.99	2.0	K 87	6
0.34	18615	4059	1.62			5.5	1214	164.05	2.1	KF 87	6
0.41	15405	3359	1.95			6.2	1088	147.09	2.3	KA 87	6
						7.2	937	126.68	2.7	KAF87	6
0.35	18225	3974	0.93	K 157R97	4						
0.46	13974	3047	1.21	KF 157R97	4	7.0	956	197.27	2.7	K 87	4
0.83	7705	1680	2.2	KA 157R97	4	8.0	848	174.99	3.0	KF 87	4
1.02	6260	1365	2.7	KAF157R97	4	8.5	795	164.05	3.2	KA 87	4
						9.4	712	147.09	3.6	KAF87	4
0.43	14845	3237	0.82								
0.47	13488	2941	0.91			6.7	1001	135.28	1.46	K 77	6
0.55	11685	2548	1.05	K 127R77	4	7.1	951	128.52	1.53	KF 77	6
0.72	8833	1926	1.38	KF 127R77	4	8.0	840	113.56	1.73	KA 77	6
0.79	8058	1757	1.52	KA 127R77	4	9.4	718	97.05	2.0	KAF77	6
0.90	7067	1541	1.73	KAF127R77	4	10	658	88.97	2.2		
1.0	6154	1342	1.99								
1.2	5398	1177	2.3			9.0	746	154.02	1.95	K 77	4
1.4	4701	1025	2.6			10	655	135.28	2.2	KF 77	4
1.5	4123	899	3.0			11	623	128.52	2.3	KA 77	4
						12	550	113.56	2.6	KAF77	4
0.82	7746	1689	0.97			14	470	97.05	3.1		
0.91	7030	1533	1.07								
1.1	6040	1317	1.25	K 107R77	4	11	598	123.54	1.29		
1.2	5274	1150	1.43	KF 107R77	4	13	523	108.03	1.47	K 67	4
1.4	4655	1015	1.62	KA 107R77	4	15	436	90.04	1.77	KF 67	4
1.6	3994	871	1.88	KAF107R77	4	18	370	76.37	2.1	KA 67	4
1.8	3586	782	2.1			20	334	68.95	2.3	KAF67	4
2.0	3146	686	2.4			23	294	60.66	2.6		
2.3	2779	606	2.7			24	277	57.28	2.8		
1.3	5054	1102	0.8								
1.5	4389	957	0.9			11	600	123.85	0.9		
1.6	3921	855	1.0			13	525	108.29	1.1		
1.9	3407	743	1.2	K 97R57	4	14	498	102.88	1.1		
2.1	2986	651	1.4	KF 97R57	4	15	437	90.26	1.3	K 57	4
2.4	2628	573	1.5	KA 97R57	4	18	371	76.56	1.5	KF 57	4
2.8	2311	504	1.7	KAF97R57	4	20	335	69.12	1.7	KA 57	4
3.2	2004	437	2.0			23	295	60.81	1.9	KAF57	4
3.6	1752	382	2.3			24	278	57.42	2.0		
4.6	1399	305	2.9			28	237	48.89	2.4		
5.4	1183	258	3.4			31	215	44.43	2.6		
6.0	1064	232	3.8								
7.0	913	199	4.4								

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type	Pole p
0.75kW						1.1kW					
18	364	75.2	1.03			1.5	6047	899	2.0		
20	338	69.84	1.11			1.8	5314	790	2.3	K 127R77	4
22	307	63.30	1.23	K 47	4	2.0	4641	690	2.6	KF 127R77	4
24	275	56.83	1.37	KF 47	4	2.3	4029	599	3.0	KA 127R77	4
28	237	48.95	1.59	KA 47	4	2.6	3625	539	3.4	KAF127R77	4
30	223	46.03	1.69	KAF47	4	3.0	3148	468	3.9		
35	192	39.61	1.96			1.2	7735	1150	1.0		
39	171	35.39	2.2			1.4	6827	1015	1.1		
45	151	31.19	2.5			1.6	5859	871	1.3		
						1.8	5260	782	1.4	K 107R77	4
31	215	44.46	0.87			2.0	4614	686	1.6	KF 107R77	4
37	184	37.97	1.02			2.3	4076	606	1.8	KA 107R77	4
39	172	35.57	1.09			2.7	3464	515	2.2	KAF107R77	4
46	145	29.96	1.30			3.1	3060	455	2.5		
48	140	28.83	1.35			3.5	2704	402	2.8		
56	121	24.99	1.55			4.0	2361	351	3.2		
60	113	23.36	1.62			4.5	2065	307	3.6		
69	98	20.19	1.78	K 37	4	1.9	4998	743	0.81		
81	83	17.15	2.0	KF 37	4	2.1	4379	651	0.92	K 97R57	4
91	74	15.31	2.2	KA 37	4	2.4	3854	573	1.05	KF 97R57	4
106	63	13.08	2.4	KAF37	4	2.8	3390	504	1.19	KA 97R57	4
114	59	12.14	2.6			3.2	2939	437	1.38	KAF97R57	4
133	51	10.49	3.0			3.6	2569	382	1.57		
156	43	8.91	3.5			4.1	2300	342	1.76		
175	39	7.96	3.8			2.9	3188	474	0.80		
204	33	6.80	4.3			3.3	2865	426	0.89		
218	31	6.37	4.4			3.7	2509	373	1.01	K 87R57	4
259	26	5.36	5.1			4.2	2220	330	1.14	KF 87R57	4
						4.7	1971	293	1.29	KA 87R57	4
						5.6	1682	250	1.51	KAF87R57	4
						5.9	1587	236	1.60		
						6.9	1352	201	1.88		
						3.9	2548	175.47	1.6	K 97	8
						4.4	2212	152.31	1.8	KF 97	8
						4.8	2037	140.28	2.0	KA 97	8
						5.5	1810	124.61	2.2	KAF97	8
						5.2	1904	175.47	2.1	K 97	6
						5.9	1653	152.31	2.4	KF 97	6
						6.5	1522	140.28	2.7	KA 97	6
						7.3	1352	124.61	3.0	KAF97	6
						8.0	1238	175.47	3.3	K 97	4
						9.1	1074	152.31	3.7	KF 97	4
						10	989	140.28	4.1	KA 97	4
										KAF97	4
						5.2	1899	174.99	1.34	K 87	6
						5.5	1780	164.05	1.42	KF 87	6
						6.2	1596	147.09	1.59	KA 87	6
						7.2	1375	126.68	1.84	KAF87	6
						8.0	1234	174.99	2.1		
						8.5	1157	164.05	2.2	K 87	4
						9.5	1037	147.09	2.4	KF 87	4
						11	894	126.68	2.8	KA 87	4
						12	812	115.16	3.1	KAF87	4
						6.7	1468	135.28	0.99	K 77	6
						7.1	1395	128.52	1.04	KF 77	6
						8.0	1232	113.56	1.18	KA 77	6
						9.4	1053	97.05	1.38	KAF77	6

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p
1.1kW						1.5kW					
10	954	135.28	1.53			0.21	61360	6738	0.77		
11	906	128.52	1.61	K 77	4	0.23	54494	5984	0.86		
12	801	113.56	1.82	KF 77	4	0.26	48720	5350	0.96		
14	685	97.05	2.1	KA 77	4	0.29	43803	4810	1.07	K 187R97	4
16	628	88.97	2.3	KAF77	4	0.32	39741	4364	1.18	KA 187R97	4
18	551	78.07	2.6			0.39	32866	3609	1.43		
19	522	73.99	2.8			0.46	27884	3062	1.69		
						0.56	22940	2519	2.0		
						0.62	20654	2268	2.3		
13	762	108.03	1.01			0.34	36964	4059	0.81		
14	724	102.62	1.06			0.42	30589	3359	0.98		
16	635	90.04	1.21			0.51	24961	2741	1.21		
18	539	76.37	1.43	K 67	4	0.64	19798	2174	1.52	K 167R97	4
20	486	68.95	1.58	KF 67	4	0.82	15463	1698	1.95	KA 167R97	4
23	428	60.66	1.80	KA 67	4	1.0	12767	1402	2.4		
24	404	57.28	1.91	KAF67	4	1.1	11757	1291	2.6		
29	344	48.77	2.2								
32	313	44.32	2.5								
36	271	38.39	2.8								
16	637	90.26	0.89			0.6	21118	2319	0.8		
18	540	76.56	1.04			0.8	15299	1680	1.1		
20	488	69.12	1.16			1.0	12431	1365	1.4	K 157R97	4
23	429	60.81	1.31			1.1	11192	1229	1.5	KF 157R97	4
24	405	57.42	1.39			1.3	9954	1093	1.7	KA 157R97	4
29	345	48.89	1.64			1.5	8578	942	2.0	KAF157R97	4
32	313	44.43	1.80			1.6	7777	854	2.2		
36	271	38.49	2.1			2.5	5145	565	3.3		
39	252	35.70	2.2			2.8	4581	503	3.7		
46	214	30.28	2.6								
51	193	27.34	2.9	K 57	4	2.6	4881	536	2.5	K 127R87	4
58	170	24.05	3.3	KF 57	4	3.3	3807	418	3.2	KF 127R87	4
62	160	22.71	3.5	KA 57	4	3.8	3342	367	3.7	KA 127R87	4
72	136	19.34	4.0	KAF57	4						
80	124	17.57	4.2								
92	107	15.22	4.6			0.80	16000	1757	0.76		
106	93	13.25	4.7			0.91	14033	1541	0.87		
117	84	11.92	4.9			1.0	12221	1342	1.00		
124	79	11.26	5.1			1.2	10718	1177	1.14	K 127R77	4
146	68	9.59	5.6			1.4	9334	1025	1.31	KF 127R77	4
161	61	8.71	6.0			1.6	8187	899	1.49	KA 127R77	4
185	53	7.55	6.4			1.8	7194	790	1.70	KAF127R77	4
213	46	6.57	7.0			2.0	6284	690	1.94		
						2.3	5455	599	2.2		
						2.6	4908	539	2.5		
						3.0	4262	468	2.9		
						3.4	3734	410	3.3		
25	401	56.83	0.94			1.4	9243	1015	0.8		
29	345	48.95	1.09			1.6	7932	871	0.9		
30	325	46.03	1.16			1.8	7121	782	1.1		
35	279	39.61	1.35	K 47	4	2.0	6247	686	1.2	K 107R77	4
40	250	35.39	1.51	KF 47	4	2.3	5519	606	1.4	KF 107R77	4
45	220	31.19	1.71	KA 47	4	2.7	4690	515	1.6	KA 107R77	4
48	207	29.32	1.82	KAF47	4	3.1	4144	455	1.8	KAF107R77	4
54	183	25.91	2.1			3.5	3661	402	2.1		
64	154	21.81	2.4			4.0	3196	351	2.4		
72	138	19.58	2.7			4.6	2796	307	2.7		
47	211	29.96	0.89								
56	176	24.99	1.07			2.4	5218	573	0.8		
60	165	23.36	1.11			2.8	4590	504	0.9		
69	142	20.19	1.22			3.2	3980	437	1.0		
82	121	17.15	1.40			3.7	3479	382	1.2	K 97R57	4
91	108	15.31	1.52	K 37	4	4.1	3114	342	1.3	KF 97R57	4
107	92	13.08	1.68	KF 37	4	4.6	2778	305	1.5	KA 97R57	4
115	86	12.14	1.76	KA 37	4	5.4	2350	258	1.7	KAF97R57	4
133	74	10.49	2.0	KAF37	4	6.0	2113	232	1.9		
157	63	8.91	2.4			7.0	1812	199	2.2		
176	56	7.96	2.6								
206	48	6.80	2.9								
220	45	6.37	3.0								
261	38	5.36	3.5								

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p
1.5kW						1.5kW					
4.2	3005	330	0.84	K 87R57	4	23	585	60.81	0.96		
4.8	2668	293	0.95	KF 87R57	4	24	552	57.42	1.02		
5.6	2277	250	1.11	KA 87R57	4	29	470	48.89	1.20		
5.9	2149	236	1.18	KAF87R57	4	32	427	44.43	1.32	K 57	4
7.0	1830	201	1.39			36	370	38.49	1.52	KF 57	4
7.7	1667	183	1.52			39	343	35.70	1.64	KA 57	4
						46	291	30.28	1.94	KAF57	4
4.9	2770	141.93	2.7	K 107	8	51	263	27.34	2.1		
5.8	2334	119.58	3.2	KF 107	8	58	231	24.05	2.4		
6.2	2163	110.83	3.5	KA 107	8	62	218	22.71	2.6		
				KAF107	8	72	186	19.34	2.9		
4.5	2972	152.31	1.36	K 97	8	35	381	39.61	0.99		
4.9	2738	140.28	1.48	KF 97	8	40	340	35.39	1.10		
5.5	2432	124.61	1.66	KA 97	8	45	300	31.19	1.25		
				KAF97	8	48	282	29.32	1.33	K 47	4
5.2	2569	175.47	1.57	K 97	6	54	249	25.91	1.51	KF 47	4
6.0	2229	152.31	1.81	KF 97	6	64	210	21.81	1.79	KA 47	4
6.6	2053	140.28	1.97	KA 97	6	72	188	19.58	2.0	KAF47	4
7.4	1824	124.61	2.2	KAF97	6	83	162	16.86	2.2		
8.0	1688	175.47	2.4	K 97	4	88	153	15.86	2.3		
9.2	1465	152.31	2.7	KF 97	4	103	131	13.65	2.6		
10	1349	140.28	3.0	KA 97	4	115	117	12.19	2.8		
11	1199	124.61	3.4	KAF97	4	119	113	11.77	3.0		
6.3	2153	147.09	1.18	K 87	6	60	225	23.36	0.82		
7.2	1854	126.68	1.37	KF 87	6	69	194	20.19	0.90		
7.9	1686	115.16	1.50	KA 87	6	82	165	17.15	1.03		
9.0	1503	102.71	1.69	KAF87	6	91	147	15.31	1.12	K 37	4
8.0	1683	174.99	1.51			107	126	13.08	1.23	KF 37	4
8.5	1578	164.05	1.61			115	117	12.14	1.29	KA 37	4
9.5	1415	147.09	1.79	K 87	4	133	101	10.49	1.49	KAF37	4
11	1218	126.68	2.1	KF 87	4	157	86	8.91	1.75		
12	1108	115.16	2.3	KA 87	4	176	77	7.96	1.90		
14	988	102.71	2.6	KAF87	4	206	65	6.80	2.2		
16	830	86.34	3.1			220	61	6.37	2.2		
						261	52	5.36	2.6		
8.0	1680	113.56	0.87	K 77	6	2.2kW					
9.4	1436	97.05	1.01	KF 77	6	0.33	57466	4364	0.82		
10	1317	88.97	1.11	KA 77	6	0.39	47524	3609	0.99		
12	1155	78.07	1.26	KAF77	6	0.46	40321	3062	1.17		
10	1301	135.28	1.12			0.50	37108	2818	1.27		
11	1236	128.52	1.18			0.56	33171	2519	1.42	K 187R97	4
12	1092	113.56	1.33			0.63	29866	2268	1.57	KA 187R97	4
14	933	97.05	1.56	K 77	4	0.69	27048	2054	1.74		
16	856	88.97	1.70	KF 77	4	0.78	23979	1821	1.96		
18	751	78.07	1.94	KA 77	4	0.88	21135	1605	2.2		
19	712	73.99	2.0	KAF77	4	0.52	36094	2741	0.83		
22	623	64.75	2.3			0.63	29655	2252	1.01		
24	561	58.34	2.6			0.65	28628	2174	1.05	K 167R97	4
27	492	51.18	3.0			0.84	22360	1698	1.35	KA 167R97	4
31	434	45.16	3.4			1.0	18462	1402	1.63		
35	385	40.04	3.8			1.1	17000	1291	1.77		
16	866	90.04	0.89			1.3	14498	1101	2.1		
18	735	76.37	1.05			1.5	12431	944	2.4		
20	663	68.95	1.16			0.85	22123	1680	0.76		
23	583	60.66	1.32	K 67	4	1.0	17975	1365	0.94	K 157R97	4
24	551	57.28	1.40	KF 67	4	1.2	16184	1229	1.05	KF 157R97	4
29	469	48.77	1.64	KA 67	4	1.3	14393	1093	1.18	KA 157R97	4
32	426	44.32	1.81	KAF67	4	1.5	12404	942	1.36	KAF157R97	4
36	369	38.39	2.1			1.7	11246	854	1.50		
39	343	35.62	2.2			1.9	9955	756	1.70		
46	291	30.22	2.7								
51	262	27.28	2.9								
58	231	24.00	3.3								

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p
2.2kW						2.2kW					
2.6	7058	536	1.73	K 127R87	4	40	490	35.20	3.0	K 77	4
3.0	6229	473	1.96	KF 127R87	4	46	430	30.89	3.4	KF 77	4
3.4	5504	418	2.2	KA 127R87	4	49	407	29.27	3.6	KA 77	4
3.9	4833	367	2.5	KAF127R87	4	55	356	25.62	4.1	KAF77	4
4.3	4346	330	2.8								
1.4	13497	1025	0.91			23	844	60.66	0.91		
1.6	11838	899	1.03			25	797	57.28	0.97		
1.8	10403	790	1.17	K 127R77	4	29	678	48.77	1.14		
2.1	9086	690	1.34	KF 127R77	4	32	616	44.32	1.25		
2.4	7888	599	1.55	KA 127R77	4	37	534	38.39	1.44		
2.6	7098	539	1.72	KAF127R77	4	40	495	35.62	1.56		
3.0	6163	468	1.98			47	420	30.22	1.83		
3.5	5399	410	2.3			52	379	27.28	2.0		
						59	334	24.00	2.3	K 67	4
						63	315	22.66	2.3	KF 67	4
						74	268	19.30	2.7	KA 67	4
						81	244	17.54	2.9	KAF67	4
						93	211	15.19	3.1		
						107	184	13.22	3.4		
						116	170	12.24	2.9		
						136	145	10.42	3.2		
						150	132	9.47	3.4		
						173	114	8.20	3.6		
						199	99	7.14	4.0		
2.3	7980	606	0.94			32	618	44.43	0.91		
2.8	6782	515	1.11			37	535	38.49	1.05		
3.1	5992	455	1.26	K 107R77	4	40	497	35.70	1.14		
3.5	5294	402	1.42	KF 107R77	4	47	421	30.28	1.34		
4.0	4622	351	1.63	KA 107R77	4	52	380	27.34	1.48	K 57	4
4.6	4043	307	1.86	KAF107R77	4	59	334	24.05	1.69	KF 57	4
5.1	3648	277	2.1			63	316	22.71	1.79	KA 57	4
5.8	3200	243	2.4			73	269	19.34	2.0	KAF57	4
						81	244	17.57	2.1		
						93	212	15.22	2.4		
						107	184	13.25	2.3		
						119	166	11.92	2.4		
						126	157	11.26	2.5		
3.7	5030	382	0.80	K 97R57	4	55	360	25.91	1.04		
4.2	4504	342	0.90	KF 97R57	4	65	303	21.81	1.24		
4.7	4016	305	1.01	KA 97R57	4	73	272	19.58	1.38	K 47	4
5.5	3397	258	1.19	KAF97R57	4	84	234	16.86	1.52	KF 47	4
6.1	3055	232	1.32			90	221	15.86	1.62	KA 47	4
7.1	2620	199	1.54			104	190	13.65	1.78	KAF47	4
						116	170	12.19	1.94		
						121	164	11.77	1.61		
						134	147	10.56	1.79		
						156	127	9.10	2.1		
5.0	3948	141.93	1.90	K 107	8	109	182	13.08	0.85		
5.9	3326	119.58	2.3	KF 107	8	135	146	10.49	1.03	K 37	4
6.4	3083	110.83	2.4	KA 107	8	159	124	8.91	1.21	KF 37	4
7.1	2763	99.34	2.7	KAF107	8	178	111	7.96	1.32	KA 37	4
						209	95	6.80	1.49	KAF37	4
						223	89	6.37	1.54		
						265	75	5.36	1.77		
6.1	3200	152.31	1.26	K 97	6						
6.7	2947	140.28	1.37	KF 97	6						
7.5	2618	124.61	1.54	KA 97	6						
14	1443	103.78	2.80	KAF97	6						
8.1	2440	175.47	1.66								
9.3	2118	152.31	1.91	K 97	4						
10	1951	140.28	2.1	KF 97	4						
11	1733	124.61	2.3	KA 97	4						
14	1443	103.78	2.8	KAF97	4						
15	1346	96.80	3.0								
9.7	2046	147.09	1.24								
11	1762	126.68	1.44	K 87	4						
12	1602	115.16	1.58	KF 87	4						
14	1428	102.71	1.78	KA 87	4						
16	1201	86.34	2.1	KAF87	4						
18	1103	79.34	2.3								
20	980	70.46	2.6								
23	876	63.00	2.9								
13	1579	113.56	0.9								
15	1350	97.05	1.08								
16	1237	88.97	1.18								
18	1086	78.07	1.34	K 77	4						
19	1029	73.99	1.42	KF 77	4						
22	901	64.75	1.62	KA 77	4						
24	811	58.34	1.80	KAF77	4						
28	712	51.18	2.0								
31	628	45.16	2.3								
35	557	40.04	2.6								

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type	Pole p
3.0kW						3.0kW					
0.46	54983	3062	0.85							K 107	4
0.5	50602	2818	0.93			10	2692	141.93	2.8	KF 107	4
0.56	45233	2519	1.04			12	2268	119.58	3.3	KA 107	4
0.63	40726	2268	1.15	K 187R97	4					KAF107	4
0.69	36883	2054	1.27	KA 187R97	4						
0.78	32699	1821	1.44			7.7	3496	124.61	1.16	K 97	6
0.88	28820	1605	1.63			9.3	2911	103.78	1.39	KF 97	6
1.0	25050	1395	1.88			9.9	2716	96.80	1.49	KA 97	6
1.2	21476	1196	2.2			11	2427	86.52	1.67	KAF97	6
0.84	30490	1698	0.99			8.1	3328	175.47	1.21		
1.0	25175	1402	1.2			9.3	2889	152.31	1.40		
1.1	23182	1291	1.3	K 167R97	4	10	2660	140.28	1.52		
1.3	19770	1101	1.52	KF 167R97	4	11	2363	124.61	1.71		
1.5	16951	944	1.77	KA 167R97	4	14	1968	103.78	2.05	K 97	4
1.7	15137	843	1.99	KAF167R97	4	15	1836	96.80	2.20	KF 97	4
1.9	13593	757	2.2			16	1646	86.52	2.46	KA 97	4
						18	1477	77.89	2.74	KAF97	4
1.2	22069	1229	0.77			20	1338	70.54	3.02		
1.3	19627	1093	0.86			23	1186	62.55	3.41		
1.5	16915	942	1.00	K 157R97	4	25	1072	56.55	3.77		
1.7	15335	854	1.10	KF 157R97	4						
1.9	13575	756	1.25	KA 157R97	4	9.6	2790	147.09	0.91		
2.5	10146	565	1.67	KAF157R97	4	11	2403	126.68	1.06		
2.8	9032	503	1.87			12	2184	115.16	1.16		
						14	1948	102.71	1.30		
2.6	9625	536	1.27			16	1637	86.34	1.55	K 87	4
3.0	8494	473	1.44	K 127R87	4	18	1505	79.34	1.69	KF 87	4
3.4	7506	418	1.63	KF 127R87	4	20	1336	70.46	1.90	KA 87	4
3.9	6590	367	1.85	KA 127R87	4	23	1195	63.00	2.1	KAF87	4
4.3	5926	330	2.1	KAF127R87	4	25	1074	56.64	2.4		
4.9	5207	290	2.3			29	932	49.16	2.7		
						32	835	44.02	2.9		
1.8	14186	790	0.86			39	693	36.52	3.4		
2.1	12390	690	0.99	K 127R77	4						
2.4	10756	599	1.14	KF 127R77	4	16	1687	88.97	0.86		
2.6	9679	539	1.26	KA 127R77	4	18	1481	78.07	0.98		
3.0	8404	468	1.45	KAF127R77	4	19	1403	73.99	1.04		
3.5	7362	410	1.66			22	1228	64.75	1.19	K 77	4
						24	1106	58.34	1.32	KF 77	4
3.1	8170	455	0.92			28	971	51.18	1.50	KA 77	4
3.5	7219	402	1.04			31	856	45.16	1.70	KAF77	4
4.0	6303	351	1.19			35	759	40.04	1.92		
4.6	5513	307	1.36	K 107R77	4	40	668	35.20	2.2		
5.1	4974	277	1.51	KF 107R77	4	46	586	30.89	2.5		
5.8	4363	243	1.72	KA 107R77	4						
6.6	3861	215	1.95	KAF107R77	4	32	841	44.32	0.92		
7.5	3394	189	2.2			37	728	38.39	1.06		
8.5	3017	168	2.5			40	676	35.62	1.14		
9.5	2676	149	2.8			47	573	30.22	1.34		
10	2496	139	3.0			52	517	27.28	1.49		
						59	455	24.00	1.65	K 67	4
5.5	4893	258	0.83	K 97R57	4	63	430	22.66	1.71	KF 67	4
6.1	4400	232	0.92	KF 97R57	4	74	366	19.30	1.95	KA 67	4
7.1	3774	199	1.07	KA 97R57	4	81	333	17.54	2.1	KAF67	4
				KAF97R57	4	93	288	15.19	2.3		
						107	251	13.22	2.5		
5.0	5366	141.46	1.40			116	232	12.24	2.1		
5.9	4543	119.76	1.66	K 107	8	136	198	10.42	2.4		
6.4	4204	110.83	1.79	KF 107	8	150	180	9.47	2.5		
7.1	3768	99.34	2.0	KA 107	8						
7.9	3402	89.68	2.2	KAF107	8	47	574	30.28	0.98	K 57	4
						52	519	27.34	1.09	KF 57	4
6.8	3968	141.46	1.9	K 107	6	59	456	24.05	1.24	KA 57	4
8.0	3360	119.76	2.2	KF 107	6	63	431	22.71	1.31	KAF57	4
8.7	3109	110.83	2.4	KA 107	6	73	367	19.34	1.47		
9.7	2787	99.34	2.7	KAF107	6	81	333	17.57	1.57		

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p
3.0kW						4.0kW					
93	289	15.22	1.74			4.0	8404	351	0.89		
107	251	13.25	1.9			4.6	7350	307	1.02		
119	226	11.92	1.7	K 57	4	5.1	6632	277	1.13	K 107R77	4
126	214	11.26	1.8	KF 57	4	5.8	5818	243	1.29	KF 107R77	4
148	182	9.59	2.1	KA 57	4	6.6	5148	215	1.46	KA 107R77	4
163	165	8.71	2.2	KAF57	4	7.5	4525	189	1.66	KAF107R77	4
188	143	7.55	2.4			8.5	4022	168	1.68		
216	125	6.57	2.6			9.5	3567	149	1.9		
						11	3232	135	2.1		
73	371	19.58	1.01			7.1	5032	199	0.80	K 97R57	4
84	320	16.86	1.12							KF 97R57	4
90	301	15.86	1.19							KA 97R57	4
104	259	13.65	1.31							KAF97R57	4
116	231	12.19	1.42	K 47	4	5.3	6825	134.94	1.8	K 127	8
121	223	11.77	1.18	KF 47	4	5.8	6202	122.60	2.0	KF 127	8
134	200	10.56	1.31	KA 47	4	6.4	5570	110.13	2.2	KA 127	8
156	173	9.1	1.53	KAF47	4					KAF127	8
166	162	8.56	1.56			6.6	5464	146.07	2.2	K 127	6
193	140	7.36	1.68			7.1	5047	134.94	2.4	KF 127	6
216	125	6.58	1.81			7.8	4587	122.60	2.7	KA 127	6
244	110	5.81	1.96			8.7	4119	110.13	3.0	KAF127	6
159	169	8.91	0.89	K 37	4	6.4	5605	110.83	1.34	K 107	8
178	151	7.96	0.97	KF 37	4	7.1	5024	99.34	1.50	KF 107	8
209	129	6.8	1.09	KA 37	4	7.9	4536	89.68	1.66	KA 107	8
223	121	6.37	1.13	KAF37	4	8.7	4120	81.46	1.83	KAF107	8
265	102	5.36	1.29			6.8	5309	141.93	1.42	K 107	6
4.0kW						8.0	4473	119.58	1.68	KF 107	6
1.7	19697	825	2.4	K 187R107	4	8.7	4146	110.83	1.81	KA 107	6
2.8	12272	514	3.8	KA 187R107	4	9.7	3716	99.34	2.0	KAF107	6
0.57	59473	2510	0.79			11	3354	89.68	2.2		
0.63	53547	2268	0.88			10	3527	141.46	2.1		
0.70	48494	2054	0.97			12	2986	119.76	2.5		
0.79	42993	1821	1.09	K 187R97	4	13	2764	110.83	2.7	K 107	4
0.90	37894	1605	1.24	KA 187R97	4	14	2477	99.34	3.0	KF 107	4
1.0	32936	1395	1.43			16	2236	89.68	3.4	KA 107	4
1.2	28237	1196	1.66			18	2031	81.46	3.7	KAF107	4
1.4	24696	1046	1.90			20	1802	72.27	4.2		
1.5	22240	942	2.1			10	3498	140.28	1.16		
1.0	33101	1402	0.91			12	3107	124.61	1.30	K 97	4
1.1	30480	1291	0.99			14	2588	103.78	1.56	KF 97	4
1.3	25994	1101	1.16	K 167R97	4	15	2414	96.80	1.67	KA 97	4
1.5	22288	944	1.35	KA 167R97	4	17	2157	86.52	1.87	KAF97	4
1.7	19903	843	1.51			18	1942	77.89	2.1		
1.9	17873	757	1.68			20	1759	70.54	2.3		
2.3	14874	630	2.0			13	2872	115.16	0.88		
1.7	20163	854	0.84	K 157R97	4	14	2561	102.71	0.99		
1.9	17849	756	0.95	KF 157R97	4	17	2153	86.34	1.18		
2.5	13339	565	1.27	KA 157R97	4	18	1978	79.34	1.28	K 87	4
2.9	11876	503	1.42	KAF157R97	4	20	1757	70.46	1.44	KF 87	4
3.3	10223	433	1.66			23	1571	63.00	1.62	KA 87	4
2.7	12655	536	0.97			25	1412	56.64	1.80	KAF87	4
3.0	11167	473	1.09	K 127R87	4	29	1226	49.16	2.1		
3.4	9869	418	1.24	KF 127R87	4	33	1098	44.02	2.3		
3.9	8665	367	1.41	KA 127R87	4	39	911	36.52	2.8		
4.3	7901	330	1.55	KAF127R87	4						
4.9	6943	290	1.76								
5.6	6057	253	2.0								
2.4	14341	599	0.85	K 127R77	4						
2.6	12905	539	0.95	KF 127R77	4						
3.0	11205	468	1.09	KA 127R77	4						
3.5	9816	410	1.24	KAF127R77	4						

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type	Pole p
4.0kW						5.5kW					
22	1615	64.75	0.90			3.4	13570	418	0.90		
25	1455	58.34	1.00			3.9	11914	367	1.03		
28	1276	51.18	1.14			4.4	10713	330	1.14	K 127R87	4
32	1126	45.16	1.29	K 77	4	5.0	9414	290	1.30	KF 127R87	4
36	998	40.04	1.46	KF 77	4	5.7	8213	253	1.49	KA 127R87	4
38	957	38.39	1.52	KA 77	4	6.7	6980	215	1.75	KAF127R87	4
41	878	35.20	1.66	KAF77	4	7.1	6590	203	1.71		
47	770	30.89	1.89			8.6	5454	168	2.1		
49	730	29.27	2.0			9.7	4805	148	2.3		
56	639	25.62	2.3								
62	576	23.08	2.5			6.7	6980	215	1.08	K 107R77	4
71	505	20.25	2.9			7.6	6136	189	1.23	KF 107R77	4
						8.6	5454	168	1.38	KA 107R77	4
						9.7	4837	149	1.55	KAF107R77	4
						11	4383	135	1.72		
48	754	30.22	1.02								
53	680	27.28	1.13			4.8	10288	150.03	1.64	K 157	8
60	598	24.00	1.26			5.9	8423	122.83	2.0	KF 157	8
64	565	22.66	1.30			7.2	6833	99.65	2.5	KA 157	8
75	481	19.30	1.48	K 67	4	7.8	6338	92.42	2.7	KAF157	8
82	437	17.54	1.59	KF 67	4						
95	379	15.19	1.74	KA 67	4	5.3	9253	134.94	1.3	K 127	8
109	330	13.22	1.91	KAF67	4	5.9	8399	122.60	1.5	KF 127	8
118	305	12.24	1.63			6.5	7556	110.13	1.6	KA 127	8
138	260	10.42	1.81			8.1	6143	89.43	2.0	KAF127	8
152	236	9.47	1.91								
176	204	8.20	2.02			7.1	6940	134.94	1.76	K 127	6
202	178	7.14	2.2			7.8	6299	122.60	1.94	KF 127	6
						8.7	5667	110.13	2.2	KA 127	6
60	600	24.05	0.94			11	4599	89.43	2.7	KAF127	6
63	566	22.71	1.00								
74	482	19.34	1.12			8.7	5700	110.83	1.32	K 107	6
82	438	17.57	1.19			9.7	5109	99.34	1.47	KF 107	6
95	380	15.22	1.33	K 57	4	11	4612	89.68	1.63	KA 107	6
109	330	13.25	1.45	KF 57	4	12	4190	81.46	1.79	KAF107	6
121	297	11.92	1.31	KA 57	4						
128	281	11.26	1.39	KAF57	4	10	4866	141.93	1.55		
150	239	9.59	1.59			12	4100	119.58	1.83	K 107	4
165	217	8.71	1.69			13	3800	110.83	1.98	KF 107	4
191	188	7.55	1.82			14	3406	99.34	2.2	KA 107	4
219	164	6.57	1.98			16	3075	89.68	2.4	KAF107	4
						18	2793	81.46	2.7		
5.5kW											
0.79	59116	1821	0.80			12	4273	124.61	0.95		
0.90	52104	1605	0.90			14	3558	103.78	1.1		
1.0	45286	1395	1.04	K 187R97	4	15	3319	96.80	1.2	K 97	4
1.2	38826	1196	1.21	KA 187R97	4	17	2967	86.52	1.35	KF 97	4
1.4	33957	1046	1.38			18	2671	77.89	1.5	KA 97	4
1.5	30580	942	1.54			20	2419	70.54	1.65	KAF97	4
2.0	23926	737	2.0			23	2145	62.55	1.85		
2.3	20095	619	2.3			25	1939	56.55	2.1		
						30	1643	47.93	2.4		
1.31	35742	1101	0.84								
1.5	30645	944	0.98			17	2960	86.34	0.85		
1.7	27367	843	1.10			18	2720	79.34	0.95		
1.9	24575	757	1.22			20	2416	70.46	1.05		
2.3	20452	630	1.47	K 167R97	4	23	2160	63.00	1.15	K 87	4
2.6	18212	561	1.65	KA 167R97	4	25	1942	56.64	1.3	KF 87	4
3.0	15550	479	1.93			29	1686	49.16	1.5	KA 87	4
3.4	13700	422	2.2			33	1509	44.02	1.6	KAF87	4
2.2	21458	661	0.79			39	1252	36.52	1.85		
2.5	18342	565	0.92	K 157R97	4	46	1076	31.39	2.3		
2.9	16329	503	1.04	KF 157R97	4	52	956	27.88	2.5		
3.3	14057	433	1.20	KA 157R97	4						
3.8	12271	378	1.38	KAF157R97	4	32	1548	45.16	0.94	K 77	4
4.3	10778	332	1.57			36	1373	40.04	1.06	KF 77	4
						47	1059	30.89	1.38	KA 77	4
						49	1004	29.27	1.45	KAF77	4
						56	878	25.62	1.66		

Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p
5.5kW						7.5kW					
62	791	23.08	1.84	K 77 KF 77 KA 77 KAF77	4	6.4	10522	150.03	1.6	K 157 KF 157 KA 157 KAF157	6
71	694	20.25	2.0			7.8	8614	122.83	2.0		
81	613	17.87	2.2			9.6	6989	99.65	2.4		
91	543	15.84	2.4			10	6482	92.42	2.6		
107	464	13.52	2.5			12	5593	79.75	3.0		
117	424	12.36	2.6								
133	371	10.81	2.7			7.1	9464	134.94	1.29	K 127	6
						7.8	8590	122.48	1.42	KF 127	6
						8.7	7727	110.18	1.58	KA 127	6
						11	6272	89.43	1.95	KAF127	6
						10	6736	146.07	1.81	K 127 KF 127 KA 127 KAF127	4
						11	6223	134.94	1.96		
						12	5648	122.60	2.2		
						13	5081	110.13	2.4		
						16	4124	89.43	3.0		
						18	3805	82.52	3.2		
						21	3272	70.95	3.7		
						10	6545	141.93	1.15		
						12	5514	119.58	1.36		
						13	5111	110.83	1.47		
						15	4581	99.34	1.64		
						16	4136	89.68	1.82		
						18	3757	81.46	2.00		
						20	3333	72.27	2.3		
						22	3024	65.58	2.5		
						26	2599	56.37	2.9		
						30	2269	49.20	3.2		
						35	1925	41.74	3.6		
						40	1682	36.48	4.0		
						15	4464	96.80	0.91	K 97 KF 97 KA 97 KAF97	4
						17	3990	86.52	1.01		
						19	3592	77.89	1.13		
						21	3253	70.54	1.24		
						23	2884	62.55	1.40		
						26	2608	56.55	1.55		
						30	2210	47.93	1.83		
						35	1931	41.87	2.1		
						38	1766	38.30	2.3		
						43	1579	34.23	2.6		
7.5kW						23	2905	63.00	0.87	K 87 KF 87 KA 87 KAF87	4
						26	2612	56.64	0.97		
						30	2267	49.16	1.12		
						33	2030	44.02	1.20		
						40	1684	36.52	1.40		
						47	1448	31.39	1.75		
						52	1286	27.88	1.90		
						59	1149	24.92	2.0		
						65	1033	22.41	2.1		
						75	897	19.45	2.4		
						84	803	17.42	2.6		
						92	736	15.95	2.3		
						101	666	14.45	3.0		
						47	1424	30.89	1.02		
						50	1350	29.27	1.08		
						57	1181	25.62	1.23		
						63	1064	23.08	1.37		
						72	934	20.25	1.56		
						82	824	17.87	1.65		
						92	730	15.84	1.80		
						108	623	13.52	1.82		
						118	570	12.36	1.89		
						135	499	10.81	1.95		
						153	440	9.54	2.0		
						173	390	8.46	2.1		
						202	333	7.22	2.3		

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type	Pole p
11kW						11kW					
1.8	52831	825	0.89			20	4888	72.27	1.54		
2.0	46107	720	1.02	K 187R107	4	22	4435	65.58	1.70	K 107	4
2.4	39319	614	1.20	KA 187R107	4	26	3813	56.37	1.97	KF 107	4
2.8	32915	514	1.43			30	3328	49.2	2.2	KA 107	4
3.3	28753	449	1.63			35	2823	41.74	2.5	KAF107	4
4.0	23374	365	2.0			40	2467	36.48	2.7		
2.0	47196	737	1.00	K 187R97	4	21	4771	70.54	0.85		
2.4	39639	619	1.19	KA 187R97	4	23	4231	62.55	0.96		
2.8	33556	524	1.40			26	3825	56.55	1.06	K 97	4
4.7	20044	313	1.50			30	3242	47.93	1.25	KF 97	4
5.3	17482	273	1.72	K 167R107	4	35	2832	41.87	1.43	KA 97	4
5.8	16009	250	1.88	KA 167R107	4	38	2590	38.3	1.56	KAF97	4
6.7	13960	218	2.2			43	2315	34.23	1.75		
7.2	13000	203	2.3			47	2085	30.82	1.94		
2.6	35925	561	0.84			52	1888	27.91	2.1		
3.0	30674	479	0.98	K 167R97	4	59	1674	24.75	2.4		
3.5	27024	422	1.11	KA 167R97	4	65	1513	22.37	2.7		
4.0	23502	367	1.28			33	2977	44.02	0.82		
4.4	21260	332	0.80	K 157R97	4	40	2470	36.52	0.95		
5.0	18571	290	0.91	KF 157R97	4	47	2123	31.39	1.20		
				KA 157R97	4	52	1886	27.88	1.30		
				KAF157R97	4	59	1685	24.92	1.39		
6.8	13768	215	0.89	K 127R87	4	65	1516	22.41	1.43	K 87	4
7.2	13000	203	0.94	KF 127R87	4	75	1315	19.45	1.64	KF 87	4
8.7	10758	168	1.14	KA 127R87	4	84	1178	17.42	1.76	KA 87	4
9.9	9478	148	1.29	KAF127R87	4	92	1079	15.95	1.57	KAF87	4
5.4	18313	135.38	1.64	K 167	8	101	977	14.45	1.9		
6.6	14932	110.38	2.0	KA 167	8	116	849	12.56	2.0		
5.9	16740	164.44	1.80	K 167	6	131	753	11.13	2.1		
7.2	13782	135.38	2.2	KA 167	6	147	674	9.96	2.2		
8.9	11122	164.44	2.7	K 167	4	177	559	8.27	2.4		
11	9158	135.38	3.3	KA 167	4	203	486	7.19	2.5		
5.9	16615	122.83	1.02	K 157	8	63	1561	23.08	0.93		
7.3	13480	99.65	1.26	KF 157	8	72	1370	20.25	1.03		
7.9	12502	92.42	1.35	KA 157	8	82	1209	17.87	1.13		
9.1	10788	79.75	1.57	KAF157	8	92	1071	15.84	1.23	K 77	4
6.5	15273	150.03	1.11	K 157	6	108	914	13.52	1.38	KF 77	4
7.9	12504	122.83	1.35	KF 157	6	118	836	12.36	1.12	KA 77	4
9.7	10144	99.65	1.67	KA 157	6	135	731	10.81	1.27	KAF77	4
10	9408	92.42	1.80	KAF157	6	153	645	9.54	1.37		
12	8119	79.75	2.1			173	572	8.46	1.46		
9.7	10147	150.03	1.67	K 157	4	202	488	7.22	1.57		
12	8308	122.83	2.0	KF 157	4	15kW					
15	6740	99.65	2.5	KA 157	4	2.4	53617	614	0.88		
16	6251	92.42	2.7	KAF157	4	2.8	44884	514	1.05	K 187R107	4
11	9127	134.94	1.34			3.3	39208	449	1.20	KA 187R107	4
12	8295	122.60	1.47	K 127	4	4.0	31873	365	1.47		
13	7449	110.13	1.64	KF 127	4	5.4	23403	268	2.0		
16	6049	89.43	2.0	KA 127	4	4.7	27332	313	1.10		
18	5581	82.52	2.2	KAF127	4	5.3	23839	273	1.26		
21	4799	70.95	2.5			5.8	21831	250	1.38		
13	7496	110.83	1.00	K 107	4	6.7	19037	218	1.58	K 167R107	4
15	6719	99.34	1.12	KF 107	4	7.2	17727	203	1.70	KA 167R107	4
16	6066	89.68	1.24	KA 107	4	7.9	16155	185	1.86		
18	5510	81.46	1.36	KAF107	4	9.0	14234	163	2.1		
						6.2	20696	237	0.82		
						7.0	18338	210	0.92	K 157R107	4
						7.9	16068	184	1.05	KF 157R107	4
						9.4	13535	155	1.25	KA 157R107	4
						12	11003	126	1.54	KAF157R107	4
						13	9606	110	1.76		

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type	Pole p
15kW						18.5kW					
5.4	25096	180.78	1.87	K 187	6	2.9	54981	514	0.85	K 187R107 KA 187R107	4
6.0	22285	160.53	2.1	KA 187	6	3.3	48028	449	0.98		
						4.0	39043	365	1.20		
						5.5	28667	268	1.64		
7.2	18793	135.38	1.60	K 167	6	6.5	24281	227	1.9		
8.8	15324	110.39	1.96	KA 167	6						
8.9	15166	164.44	1.12	K 167	4	4.7	33481	313	0.90	K 167R107 KA 167R107	4
11	12486	135.38	1.36	KA 167	4	5.4	29202	273	1.03		
						5.9	26742	250	1.12		
						6.7	23319	218	1.29		
7.9	16990	122.39	1.00	K 157	6	7.2	21714	203	1.39	K 157R107 KA 157R107	4
9.7	13833	99.65	1.22	KF 157	6	7.9	19789	185	1.52		
10	12830	92.42	1.32	KA 157	6	9.0	17436	163	1.73		
12	11071	79.75	1.53	KAF157	6	11	14868	139	2.0		
14	9770	70.35	1.73			12	12943	121	2.3		
9.7	13837	150.03	1.22	K 157	4	8.0	19682	184	0.86	K 157R107	4
12	11329	122.83	1.49	KF 157	4	9.5	16580	155	1.02	KF 157R107	4
15	9191	99.65	1.84	KA 157	4	12	13478	126	1.26	KA 157R107	4
16	8524	92.42	2.0	KAF157	4	13	11766	110	1.44	KAF157R107	4
18	7355	79.75	2.3								
11	12445	134.94	0.97	K 127 KF 127 KA 127 KAF127	4	5.4	30951	180.78	1.52	K 187 KA 187	6
12	11307	122.60	1.08			6.0	27484	160.53	1.71		
13	10157	110.13	1.20			6.7	24745	144.53	1.9		
16	8248	89.43	1.48			7.4	22317	130.35	2.1		
18	7611	82.52	1.61			8.1	20424	180.78	2.3	K 187 KA 187	4
21	6544	70.95	1.87			9.2	18136	160.53	2.6		
23	5774	62.60	2.1			10	16328	144.53	2.9		
27	4987	54.07	2.5			11	14726	130.35	3.2		
31	4410	47.82	2.8								
16	8271	89.68	0.91	K 107 KF 107 KA 107 KAF107	4	11	15195	134.5	1.98	K 167 KA 167	4
18	7513	81.46	1.00			13	12471	110.39	2.4		
20	6665	72.27	1.13			17	9851	87.20	3.1		
22	6048	65.58	1.24								
26	5199	56.37	1.45			10	17061	99.65	0.99	K 157	6
30	4538	49.2	1.62			11	15823	92.42	1.08	KF 157	6
35	3850	41.74	1.80			12	13654	79.75	1.24	KA 157	6
40	3365	36.48	2.0			14	12050	70.38	1.4	KAF157	6
45	2972	32.22	2.2								
47	2844	30.84	2.3			12	13827	122.39	1.22	K 157 KF 157 KA 157 KAF157	4
51	2637	28.59	2.6			15	11258	99.65	1.50		
						16	10441	92.42	1.62		
						18	9010	79.75	1.88		
30	4421	47.93	0.91	K 97 KF 97 KA 97 KAF97	4	21	7951	70.38	2.1	K 127 KF 127 KA 127 KAF127	4
35	3862	41.87	1.05			24	6894	61.02	2.5		
38	3532	38.3	1.14			27	6133	54.29	2.8		
43	3157	34.23	1.28			31	5286	46.79	3.2		
47	2843	30.82	1.42			39	4295	38.02	3.9		
52	2574	27.91	1.57								
59	2283	24.75	1.77			13	12442	110.13	0.98	K 107 KF 107 KA 107 KAF107	4
65	2063	22.37	1.96			16	10103	89.43	1.21		
77	1749	18.96	2.3			18	9323	82.52	1.31		
88	1527	16.56	2.6			21	8016	70.95	1.52		
47	2895	31.39	0.88	K 87 KF 87 KA 87 KAF87	4	23	7072	62.60	1.73	K 107 KF 107 KA 107 KAF107	4
52	2571	27.88	0.99			27	6109	54.07	2.0		
59	2298	24.92	1.10			31	5403	47.82	2.3		
65	2067	22.41	1.23			37	4540	40.19	2.7		
75	1794	19.45	1.37			41	4121	36.48	3.0		
84	1607	17.42	1.41			47	3544	31.36	3.4		
92	1471	15.95	1.48			53	3127	27.67	3.9		
101	1333	14.45	1.5								
116	1158	12.56	1.53			20	8165	72.27	0.92	K 107 KF 107 KA 107 KAF107	4
131	1027	11.13	1.58			22	7409	65.58	1.01		
147	919	9.96	1.73			26	6368	56.37	1.18		
177	763	8.27	1.84			30	5558	49.2	1.35		
203	663	7.19	2.2			35	4716	41.74	1.47		
						40	4121	36.48	1.64		

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type	Pole p
18.5kW						22kW					
46	3640	32.22	1.86			9.7	20289	99.65	0.83	K 157	6
48	3484	30.84	1.88	K 107	4	11	18817	92.42	0.90	KF 157	6
51	3230	28.59	2.1	KF 107	4	12	16237	79.75	1.04	KA 157	6
57	2931	25.94	2.3	KA 107	4	14	14330	70.38	1.18	KAF157	6
66	2519	22.30	2.7	KAF107	4	16	12424	61.02	1.36		
76	2199	19.46	3.1			12	16502	122.83	1.03		
89	1865	16.51	3.6			15	13388	99.65	1.26		
						16	12417	92.42	1.36	K 157	4
35	4730	41.87	0.85			18	10714	79.75	1.58	KF 157	4
48	3482	30.82	1.16			21	9456	70.38	1.79	KA 157	4
53	3153	27.91	1.28	K 97	4	24	8198	61.02	2.1	KAF157	4
59	2796	24.75	1.45	KF 97	4	27	7294	54.29	2.3		
66	2527	22.37	1.60	KA 97	4	31	6286	46.79	2.7		
78	2142	18.96	1.9	KAF97	4	39	5108	38.02	3.3		
89	1871	16.56	2.2								
106	1565	13.85	2.6			16	12015	89.43	1.02		
123	1355	11.99	2.7			18	11087	82.52	1.10		
						21	9532	70.95	1.28		
59	2815	24.92	0.83			23	8410	62.60	1.45	K 127	4
66	2532	22.41	0.85			27	7264	54.07	1.68	KF 127	4
76	2197	19.45	0.98			31	6425	47.82	1.90	KA 127	4
84	1968	17.42	1.05	K 87	4	37	5400	40.19	2.3	KAF127	4
102	1633	14.45	1.12	KF 87	4	40	4901	36.48	2.5		
117	1419	12.56	1.21	KA 87	4	47	4215	31.36	2.9		
132	1257	11.13	1.25	KAF87	4	53	3719	27.67	3.3		
148	1125	9.96	1.32			61	3212	23.90	3.8		
178	934	8.27	1.41			70	2841	21.14	4.3		
204	812	7.19	1.50								
22kW						22kW					
3.3	57114	449	0.82			26	7573	56.37	0.99		
4.0	46429	365	1.01			30	6610	49.20	1.11		
5.5	34091	268	1.38	K 187R107	4	35	5608	41.74	1.23		
6.5	28875	227	1.63	KA 187R107	4	40	4901	36.48	1.38		
7.4	25313	199	1.86			46	4329	32.22	1.56		
8.8	21370	168	2.2			48	4143	30.84	1.54	K 107	4
						51	3841	28.59	1.76	KF 107	4
5.4	34727	273	0.87			57	3485	25.94	1.94	KA 107	4
5.9	31801	250	0.95			66	2996	22.30	2.2	KAF107	4
6.7	27730	218	1.08			76	2614	19.46	2.3		
7.2	25822	203	1.16	K 167R107	4	89	2218	16.51	2.6		
7.9	23533	185	1.28	KA 167R107	4	102	1939	14.43	2.6		
9.0	20734	163	1.45			109	1815	13.51	2.9		
11	17681	139	1.70			125	1584	11.79	3.0		
12	15392	121	2.0			147	1343	10	3.3		
9.5	19717	155	0.86	K 157R107	4	48	4141	30.82	0.98		
12	16028	126	1.06	KF 157R107	4	53	3750	27.91	1.08		
13	13992	110	1.21	KA 157R107	4	59	3325	24.75	1.22		
				KAF157R107	4	66	3005	22.37	1.34	K 97	4
5.4	36807	180.78	1.28			78	2547	18.96	1.59	KF 97	4
6.0	32684	160.53	1.44			89	2225	16.56	1.82	KA 97	4
6.7	29427	144.53	1.60	K 187	6	106	1861	13.85	1.87	KAF97	4
7.4	26540	130.35	1.77	KA 187	6	123	1611	11.99	2.1		
8.6	23044	113.18	2.0			137	1439	10.71	2.2		
						164	1202	8.95	2.3		
8.1	24288	180.78	1.94			76	2613	19.45	0.83		
9.2	21567	160.53	2.2	K 187	4	84	2340	17.42	0.88		
10	19418	144.53	2.4	KA 187	4	102	1941	14.45	0.94	K 87	4
11	17512	130.35	2.7			117	1687	12.56	1.02	KF 87	4
						132	1495	11.13	1.05	KA 87	4
11	18070	134.5	1.66			148	1338	9.96	1.11	KAF87	4
13	14831	110.39	2.0	K 167	4	178	1111	8.27	1.18		
17	11715	87.20	2.6	KA 167	4	204	966	7.19	1.27		
19	10460	77.86	2.9								

Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p	Output speed r/min	Output torque Nm	Ratio i	Service factor f_B	Type Type	Pole p
30kW						37kW					
5.5	49099	268	0.96	K 187R107 KA 187R107	4	5.5	56947	268	0.83	K 187R107 KA 187R107	4
6.5	41587	227	1.13		4	6.5	48235	227	0.97		4
7.4	36458	199	1.29		4	7.4	42285	199	1.11		4
8.8	30778	168	1.5		4	8.8	35698	168	1.32		4
6.7	39938	218	0.75	K 167R107 KA 167R107	4	8.0	39310	185	0.77	K 167R107 KA 167R107	4
7.2	37190	203	0.81		4	9.1	34635	163	0.87		4
7.9	33893	185	0.89		4	11	29536	139	1.02		4
9.0	29862	163	1.01		4	12	25711	121	1.17		4
11	25465	139	1.18		4	8.2	40572	180.78	1.16	K 187 KA 187	4
12	22168	121	1.36	K 187 KA 187	4	8.9	37268	166.06	1.26		4
8.1	33120	180.78	1.42		4	10	32436	144.53	1.45		4
8.9	30423	166.06	1.54		4	11	29395	130.98	1.60		4
10	26478	144.53	1.78		4	13	25400	113.18	1.85		4
11	23996	130.98	1.96	K 167 KA 167	4	14	23046	102.69	2.0	K 167 KA 167	4
13	20735	113.18	2.3		4	17	19853	88.46	2.4		4
14	18813	102.69	2.5		4	14	24559	109.43	1.22		4
17	16206	88.46	2.9		4	17	19646	87.54	1.53		4
13	20048	109.43	1.50		4	19	17828	78.44	1.69		4
17	15975	87.20	1.88	K 157 KF 157 KA 157 KAF157	4	22	15301	68.18	2.0	K 157 KF 157 KA 157 KAF157	4
19	14554	79.44	2.1		4	24	13582	60.52	2.2		4
22	12427	67.83	2.4		4	35	9592	42.74	3.1		4
24	11088	60.52	2.7		4	16	20741	92.42	0.82		4
15	18256	99.65	0.93		4	19	17898	79.75	0.95	K 127 KF 127 KA 127 KAF127	4
16	16932	92.42	1.00	K 127 KF 127 KA 127 KAF127	4	21	15795	70.38	1.07		4
18	14611	79.75	1.16		4	24	13694	61.02	1.24		4
21	12894	70.38	1.31		4	27	12184	54.29	1.39		4
24	11179	61.02	1.51		4	32	10501	46.79	1.61		4
27	9946	54.29	1.70	K 107 KF 107 KA 107 KAF107	4	39	8533	38.02	1.98	K 107 KF 107 KA 107 KAF107	4
31	8572	46.79	1.97		4	47	7025	31.30	2.4		4
39	6965	38.02	2.4		4	24	14049	62.60	0.87		4
47	5734	31.30	3.0		4	27	12135	54.07	1.01		4
21	12998	70.95	0.94	K 107 KF 107 KA 107 KAF107	4	31	10732	47.82	1.14		4
23	11469	62.60	1.07		4	37	9020	40.19	1.35		4
27	9906	54.07	1.23		4	41	8187	36.48	1.49		4
31	8761	47.82	1.39		4	47	7040	31.36	1.74		4
37	7363	40.19	1.66		4	53	6212	27.67	1.97		4
40	6683	36.48	1.83	K 97 KF 97 KA 97 KAF97	4	62	5366	23.90	2.3	K 97 KF 97 KA 97 KAF97	4
47	5747	31.36	2.1		4	70	4747	21.14	2.6		4
53	5071	27.67	2.4		4	83	3988	17.77	2.8		4
61	4380	23.90	2.8		4	103	3220	14.35	3.1		4
35	7647	41.74	0.90	K 97 KF 97 KA 97 KAF97	4	116	2870	12.78	3.1		4
40	6683	36.48	1.01		4	138	2410	10.74	3.5	K 97 KF 97 KA 97 KAF97	4
46	5903	32.22	1.08		4	171	1948	8.68	3.5		4
51	5238	28.59	1.29		4	41	8187	36.48	0.83		4
57	4752	25.94	1.42		4	48	6921	30.84	0.92		4
66	4085	22.30	1.63	K 97 KF 97 KA 97 KAF97	4	52	6416	28.59	1.05	K 97 KF 97 KA 97 KAF97	4
76	3565	19.46	1.66		4	57	5822	25.94	1.16		4
89	3025	16.51	1.87		4	66	5005	22.3	1.33		4
102	2644	14.43	1.90		4	76	4367	19.46	1.35		4
109	2475	13.51	2.15		4	90	3705	16.51	1.53		4
125	2160	11.79	2.19	K 97 KF 97 KA 97 KAF97	4	103	3238	14.43	1.55	K 97 KF 97 KA 97 KAF97	4
147	1832	10.00	2.39		4	110	3032	13.51	1.75		4
168	1601	8.74	2.45		4	126	2646	11.79	1.79		4
59	4534	24.75	0.89		4	148	2244	10.00	1.82		4
66	4098	22.37	0.99		4	169	1961	8.74	1.95		4
78	3474	18.96	1.16	K 97 KF 97 KA 97 KAF97	4	41	8187	36.48	0.83	K 97 KF 97 KA 97 KAF97	4
89	3034	16.56	1.33		4	48	6921	30.84	0.92		4
106	2537	13.85	1.59		4	52	6416	28.59	1.05		4
123	2197	11.99	1.66		4	57	5822	25.94	1.16		4
137	1962	10.71	1.37		4	66	5005	22.3	1.33		4
164	1640	8.95	1.52		4	76	4367	19.46	1.35		4

Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p		
45kW						55kW							
6.5	58664	227	0.80	K 187R107	4	17	29204	87.54	1.03	K 167	4		
7.4	51428	199	0.91		4	19	25974	77.86	1.16				
8.8	43416	168	1.08		4	22	22745	68.18	1.32				
11	35922	139	0.84	K 167R107	4	24	20263	60.74	1.48				
12	31270	121	0.96	KA 167R107	4	29	17207	51.58	1.75				
8.2	49344	180.78	0.95	K 187	4	35	14258	42.74	2.1	KA 157	4		
8.9	45326	166.06	1.04		4	41	12170	36.48	2.5				
10	39449	144.53	1.19		4	24	20357	61.02	0.83				
11	35751	130.98	1.31		4	27	18111	54.29	0.93				
13	30892	113.18	1.52		4	32	15609	46.79	1.08				
14	28029	102.69	1.68		4	39	12684	38.02	1.33				
17	24145	88.46	1.9		4	47	10442	31.30	1.62				
20	20291	74.34	2.3		4	54	9214	27.62	1.84				
14	29869	109.43	1.01	K 167	4	62	7990	23.95	2.1	KAF157	4		
17	23894	87.54	1.26		4	69	7109	21.31	2.4				
19	21683	79.44	1.42		4	81	6128	18.37	2.8				
22	18610	68.18	1.62		4	99	4977	14.92	3.4				
24	16519	60.52	1.82		4	117	4220	12.65	3.8				
29	14079	51.58	2.1		4	37	13408	40.19	0.91				
35	11666	42.74	2.6	K 157	4	47	10465	31.36	1.17	K 127	4		
21	19210	70.38	0.88		4	53	9234	27.67	1.32				
24	16655	61.02	1.02		4	62	7976	23.90	1.53				
27	14818	54.29	1.14		4	70	7056	21.14	1.73				
32	12771	46.79	1.32		4	83	5928	17.77	2.06				
39	10378	38.02	1.63		4	103	4787	14.35	2.38				
47	8543	31.30	2.0		4	116	4267	12.78	1.88				
54	7539	27.62	2.2		4	138	3583	10.74	2.1				
62	6537	23.95	2.6		4	171	2896	8.68	2.3				
69	5817	21.31	2.9	KAF157	4	75kW							
81	5014	18.37	3.4		4	11	59298	130.35	0.79			K 187	4
31	13052	47.82	0.94	K 127	4	13	52224	114.80	0.90				
37	10970	40.19	1.11		4	14	47016	103.35	1.00				
41	9957	36.48	1.23		4	17	40242	88.46	1.17				
47	8562	31.36	1.43		4	20	33818	74.34	1.39				
53	7555	27.67	1.62		4	23	29283	64.37	1.61				
62	6526	23.90	1.87		4	28	24402	53.64	1.9				
70	5773	21.14	2.1		4	32	20803	45.73	2.3				
83	4850	17.77	2.3		4	19	35420	77.86	0.85				
103	3917	14.35	2.5		4	22	30857	67.83	0.97				
116	3491	12.78	2.6		4	24	27531	60.52	1.09				
138	2931	10.74	2.8		4	29	23496	51.65	1.28				
171	2369	8.68	2.9		4	34	19598	43.08	1.53				
52	7804	28.59	0.87	K 107	4	41	16595	36.48	1.81	K 167	4		
57	7080	25.94	0.96		4	46	14616	32.13	2.1				
66	6087	22.30	1.10		4	52	13042	28.67	2.3				
76	5312	19.46	1.11		4	61	11114	24.43	2.7				
90	4506	16.51	1.26		4	39	17296	38.02	0.98				
103	3939	14.43	1.44		4	47	14239	31.30	1.19				
110	3688	13.51	1.47		4	54	12565	27.62	1.35				
126	3218	11.79	1.55		4	62	10895	23.95	1.55				
148	2729	10.00	1.60		4	69	9694	21.31	1.75				
169	2386	8.74	1.64		4	81	8357	18.37	2.0				
10	45904	145.33	1.02	K 187	4	99	6787	14.92	2.5	KAF157	4		
11	41371	130.98	1.14		4	117	5755	12.65	2.9				
13	36261	114.80	1.30		4	47	14271	31.36	0.86				
14	32436	102.69	1.45		4	53	12592	27.67	0.97				
17	29511	88.46	1.59		4	62	10877	23.90	1.12				
20	24800	74.34	1.90		4	70	9621	21.14	1.27				
23	21474	64.37	2.19		4	83	8084	17.77	1.36				
						103	6528	14.35	1.51				
						114	5900	12.78	1.54				
						138	4886	10.74	1.72				
						171	3949	8.68	1.74				

Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p
90kW						132kW					
14	56058	102.69	0.84	K 187 KA 187	4	20	59121	74.34	0.79	K 187 KA 187	4
16	51134	93.67	0.92			23	51192	64.37	0.92		
19	42242	77.38	1.11			28	42659	53.64	1.10		
23	35139	64.37	1.34			31	38499	48.41	1.22		
28	29282	53.64	1.61			34	34666	43.59	1.36		
31	26427	48.41	1.8			38	30841	38.78	1.52		
34	23796	43.59	2.0			45	26570	33.41	1.77		
38	21170	38.78	2.2			53	22331	28.08	2.1		
22	37028	67.83	0.81	K 167 KA 167	4	61	19333	24.31	2.3	K 167 KA 167	4
24	33038	60.52	0.91			74	16112	20.26	2.6		
29	28157	51.58	1.07			86	13734	17.27	2.8		
35	23332	42.74	1.29			35	33990	42.74	0.88		
40	19953	36.55	1.51			41	29012	36.48	1.04		
45	17807	32.62	1.69			46	25942	32.62	1.16		
52	15651	28.67	1.92			54	22053	27.73	1.36		
61	13336	24.43	2.3			61	19429	24.43	1.55		
73	11054	20.25	2.7	74	16104	20.25	1.87	K 157 KF 157 KA 157 KAF157	4		
86	9433	17.28	3.2	86	13742	17.28	2.2				
39	20755	38.02	0.82	62	19047	23.95	0.89				
47	17087	31.30	0.99	70	16947	21.31	1.00				
54	15078	27.62	1.12	81	14609	18.37	1.16				
62	13074	23.95	1.29	100	11866	14.92	1.43				
69	11633	21.31	1.45	118	10060	12.65	1.59				
81	10028	18.37	1.69	28	51708	53.64	0.91				
99	8145	14.92	2.1	33	44082	45.73	1.07	K 187 KA 187	4		
117	6906	12.65	2.5	42	34096	35.37	1.38				
62	13052	23.90	0.94	47	30693	31.84	1.53				
70	11546	21.14	1.06	61	23434	24.31	1.9				
83	9701	17.77	1.15	74	19530	20.26	2.1				
103	7834	14.35	1.26	86	16648	17.27	2.3				
116	6982	12.78	1.28	41	35166	36.48	0.86				
138	5863	10.74	1.43	62	23338	24.21	1.29				
171	4738	8.68	1.45	73	19800	20.54	1.52	K 167 KA 167	4		
17	58625	88.46	0.80	86	16657	17.28	1.81				
20	49267	74.34	0.95	81	17708	18.37	0.96				
21	46173	69.67	1.02	100	14382	14.92	1.18				
24	41853	63.14	1.12	118	12194	12.65	1.39				
33	30307	45.73	1.55	33	55103	45.73	0.85				
35	28332	42.75	1.66	45	40258	33.41	1.17				
38	26178	39.50	1.80	47	38366	31.84	1.23				
42	23441	35.37	2.0	59	30618	25.41	1.54	K 187 KA 187	4		
53	18610	28.08	2.5	74	24413	20.26	1.69				
29	34184	51.58	0.88	86	20810	17.27	1.87				
35	28325	42.74	1.06	61	29437	24.43	1.02				
41	24176	36.48	1.24	73	24750	20.54	1.22				
46	21618	32.62	1.39	86	20906	17.35	1.44				
54	18378	27.73	1.64	100	17978	14.92	0.94				
61	16191	24.43	1.86	118	15243	12.65	1.05				
74	13420	20.25	2.2					K 157 KF 157 KA 157 KAF157	4		
86	11452	17.28	2.6								
60	15872	23.95	1.07	K 157	4						
70	14123	21.31	1.20	KF 157	4						
81	12174	18.37	1.39	KA 157	4						
100	9888	14.92	1.71	KAF157	4						
118	8384	12.65	2.0								

Permissible torque	Output speed	Ratio	Type	Power	Permissible torque	Output speed	Ratio	Type	Power			
Nm	r/min	i	Type	kW/4p	Nm	r/min	i	Type	kW/4p			
200	5.0	279	K 37R17 KF 37R17 KA 37R17 KAF37R17	0.18	1550	1.0	1388	K 77R37 KF 77R37 KA 77R37 KAF77R37	0.25			
	5.2	267				1.1	1218					
	5.9	234				1.3	1053					
	6.8	205				1.5	924					
	7.7	181		1.7		815	0.37					
	8.7	160		2.0		709						
	10	136		2.2		622			0.55			
	11	127		2.5		552						
	13	110		2.9		485	0.75					
	14	96		3.2		428						
400	2.5	552	K 47R37 KF 47R37 KA 47R37 KAF47R37	0.18		3.9			358	K 87R57 KF 87R57 KA 87R57 KAF87R57	1.1	
	2.8	495				4.3			320			
	3.3	416				4.9	283					
	3.7	375				5.7	246					
	4.3	326		0.25	2700	0.34	4037	K 97R57 KF 97R57 KA 97R57 KAF97R57	0.18			
	4.8	289				0.39	3609					
	5.6	250				0.45	3107					
	6.3	219				0.51	2728					
	7.2	193		0.37		0.59	2371		0.25			
	8.3	167				0.67	2088					
9.3	149	0.75	1854									
11	128	0.84	1658			0.37						
600	1.5	906	K 57R37 KF 57R37 KA 57R37 KAF57R37	0.18			0.98		1415		K 97R57 KF 97R57 KA 97R57 KAF97R57	0.55
	1.7	806					1.1		1229			
	2.0	699					1.3		1078			
	2.3	615				1.5	951					
	2.6	544		0.25		1.7	837		0.75			
	2.9	473				1.9	726					
	3.3	421			2.2	638						
	3.8	362			2.5	562	1.1					
	4.4	319		3.0	474							
	5.1	273		3.3	426							
5.8	240	0.55	3.8	373	1.5							
6.5	215		4.2	330								
7.2	192		4.8	293		2.2						
8.4	166		5.6	250								
9.9	141	5.9	236									
11	126	7.0	201									
820	13	108	K 67R37 KF 67R37 KA 67R37 KAF67R37	1.10	4300	0.23	6027	K 97R57 KF 97R57 KA 97R57 KAF97R57	0.18			
	15	95				0.26	5392					
	1.2	1171				0.30	4669					
	1.3	1034				0.34	4082					
	1.5	903		0.25		0.39	3583					
	1.8	793				0.45	3108					
	2.0	697				0.51	2757		0.37			
	2.3	613				0.58	2419					
	2.6	542		0.66		2123						
	3.0	471		0.75		1856	0.55					
3.3	420	0.86	1625									
3.9	361	0.98	1430									
4.3	323	1.1	1261									
5.1	272	0.55	1.3	1102		0.75						
5.8	240		1.5	957								
6.4	217		1.6	855	1.1							
7.3	191		1.9	743								
1550	0.59	2370	K 77R37 KF 77R37 KA 77R37 KAF77R37	0.18		2.1	651	1.5				
	0.68	2050				2.4	573					
	0.78	1772			2.8	504						
	0.92	1514			3.2	437						
					3.6	382	2.2					
		4.1	342									


All gear units are overloaded in above table. Determination of operating torque should not higher than the gearunit's nominal torque.

Permissible torque	Output speed	Ratio	Type	Power	Permissible torque	Output speed	Ratio	Type	Power			
Nm	r/min	i	Type	kW/4p	Nm	r/min	i	Type	kW/4p			
4300	4.6	305	K 97R57	3.0	13000	1.5	899	K 127R77	3.0			
	5.4	258	KF 97R57			1.8	790					
	6.0	232	KA 97R57	2.0		690	4.0					
	7.1	199	KAF97R57	2.3		599						
8000	0.13	10528	K 107R77	0.18		18000	2.6	539	KAF127R77	5.5		
		9391					3.0	468				
		8211					3.4	410				
	0.19	7167		0.25			2.6	536	K 127R87	4.0		
		6097					2.9	473				
		5582					3.3	418				
	0.27	5065		0.37			3.8	367	KA 127R87	5.5		
		4299					4.2	330				
		3757					4.8	290				
	0.43	3236	KAF107R77	0.55	18000		0.08	17679		0.55		
		2869					0.09	15729				
		2504					0.10	14721				
	0.63	2203		0.75		0.11	13097					
		1869				0.12	11368					
						0.14	10114					
	0.83	1689		1.1		0.16	8718					
		1533				0.18	7734					
		1317				0.27	5074	K 157R97	1.1			
	1.2	1150		1.5		0.31	4514					
		1015				0.35	3974					
		871				0.40	3516					
	1.8	782		2.2		0.46	3047			K 157R97	1.5	
		686				0.48	2899					
		606				0.60	2319	KA 157R97				
	2.7	515		3.0		0.69	2026	KAF157R97	2.2			
		455				0.77	1802					
		3.6				402	4.0		0.83	1680		
	351			1.0		1365						
	307			5.5		1.1	1229	K 157R107	3.0			
	277			1.3		1093						
243			1.5	942								
13000	0.08	17550		0.18		1.6	854					
	0.09	16006				1.8	756					
	0.10	14975				2.1	661					
	0.13	10914		0.25		2.5	565		5.5			
		9819				2.9	503					
						3.3	433		7.5			
	0.16	8443		0.37		5.0	290					
		7483				4.8	307	K 157R107	11			
		6565				5.6	260					
	0.24	5804	K 127R77	0.55		6.2	237	KF 157R107	15			
		5027				7.0	210					
		4423				0.07	19653			KA 157R107	0.55	
	0.37	3801		0.75		0.08	17345					
						0.09	14945					
						0.11	13190					
	0.43	3237		1.1		0.12	11532	K 167R97	0.75			
		2941				0.14	10227					
						0.16	8597					
	0.55	2548		1.5		0.21	6538	KA 167R97	1.1			
		2218				0.26	5366					
		1926				0.29	4798					
	0.72			2.2		0.34	4059	1.5				
	0.79	1757		1.5				0.75				
		1541										
	1.0	1342		2.2				1.1				
		1177										
		1025										
	1.2			2.2				1.5				


All gear units are overloaded in above table. Determination of operating torque should not higher than the gearunit's nominal torque.

Permissible torque Nm	Output speed r/min	Ratio i	Type Type	Power kW/4p	Permissible torque Nm	Output speed r/min	Ratio i	Type Type	Power kW/4p
32000	0.42	3359	K 167R97 KA 167R97	2.2	50000	2.0	720	K 187R107 KA 187R107	15
	0.52	2741				2.4	614		
	0.63	2252		3		2.9	514		18.5
	0.65	2174				3.3	449		
	0.85	1698		4		4.0	365		30
	1.0	1402				5.5	268		37
	1.1	1291		5.5		6.5	227		
	1.3	1101				7.4	199		45
	1.5	944		7.5		8.8	168		
	1.7	843							
	1.9	757							
	2.6	561		11					
	3.0	479							
	3.4	422		15					
	3.9	367							
	4.7	313		18.5					
	5.4	273		22					
	5.9	250							
	6.7	218		30					
	7.2	203							
	7.9	185							
50000	9.0	163	K 167R107 KA 167R107	37					
	11	139		45					
	12	121							
	0.04	32625		0.55					
	0.05	27165							
	0.06	24353							
	0.07	19144							
	0.08	16978							
	0.10	14272		0.75					
	0.11	13116							
	0.12	11647							
	0.13	10413		1.1					
	0.15	9363							
	0.17	8126							
	0.19	7333		1.5					
	0.21	6738							
	0.24	5984							
	0.27	5350		2.2					
	0.30	4810							
	0.33	4364							
	0.39	3609	K 187R97 KA 187R97	3					
	0.46	3062							
	0.56	2519		4					
	0.63	2268							
	0.69	2054							
	0.78	1821		5.5					
	0.88	1605							
	1.0	1395		7.5					
	1.2	1196							
	2.0	737		15					
	2.4	619							
	2.8	524		18.5					


All gear units are overloaded in above table. Determination of operating torque should not higher than the gearunit's nominal torque.

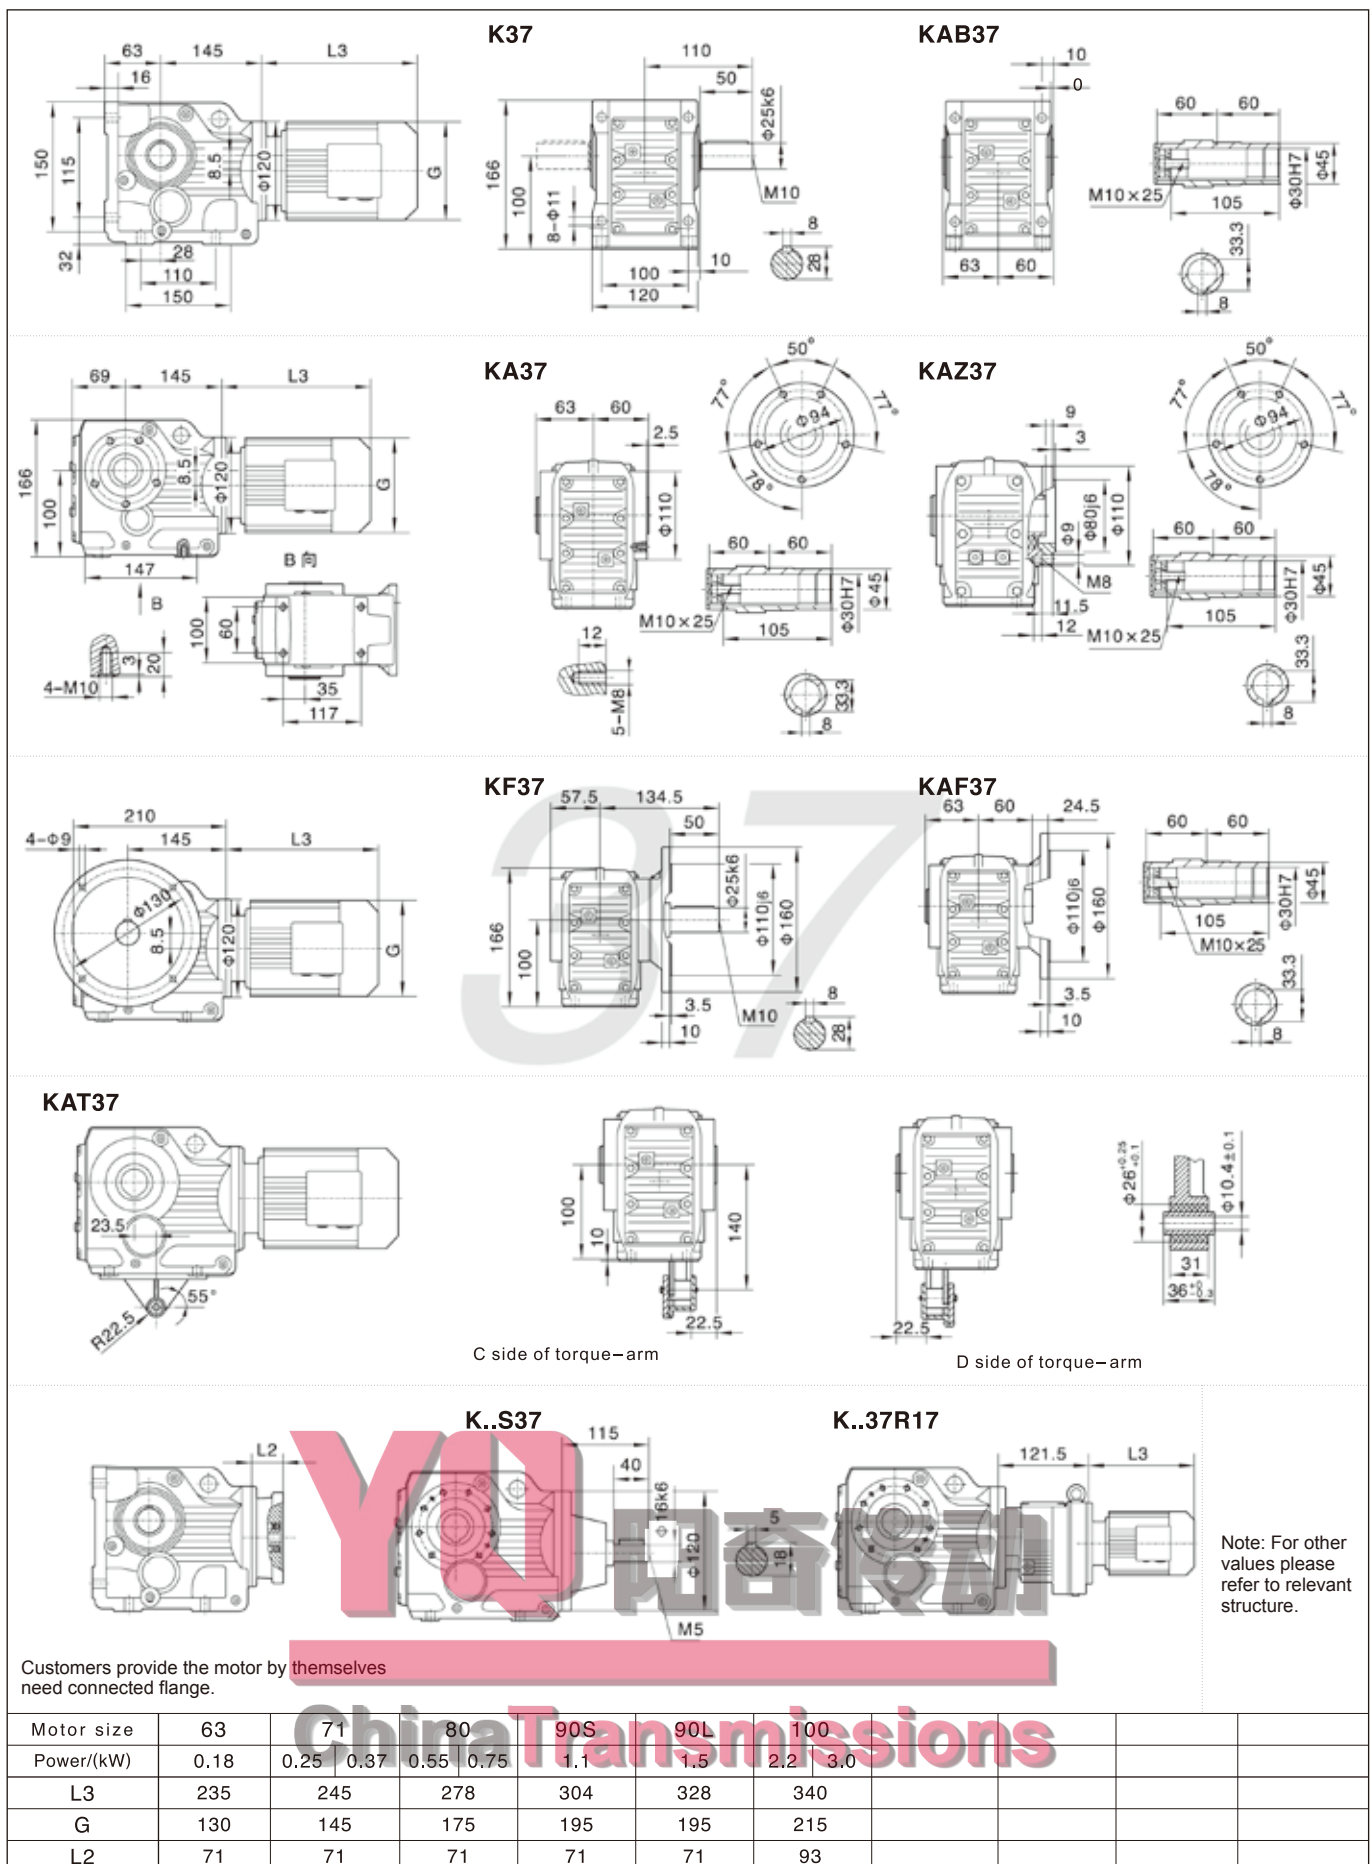


Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2. "K..." means K, KA, KF, KAF, KAZ, KAB.

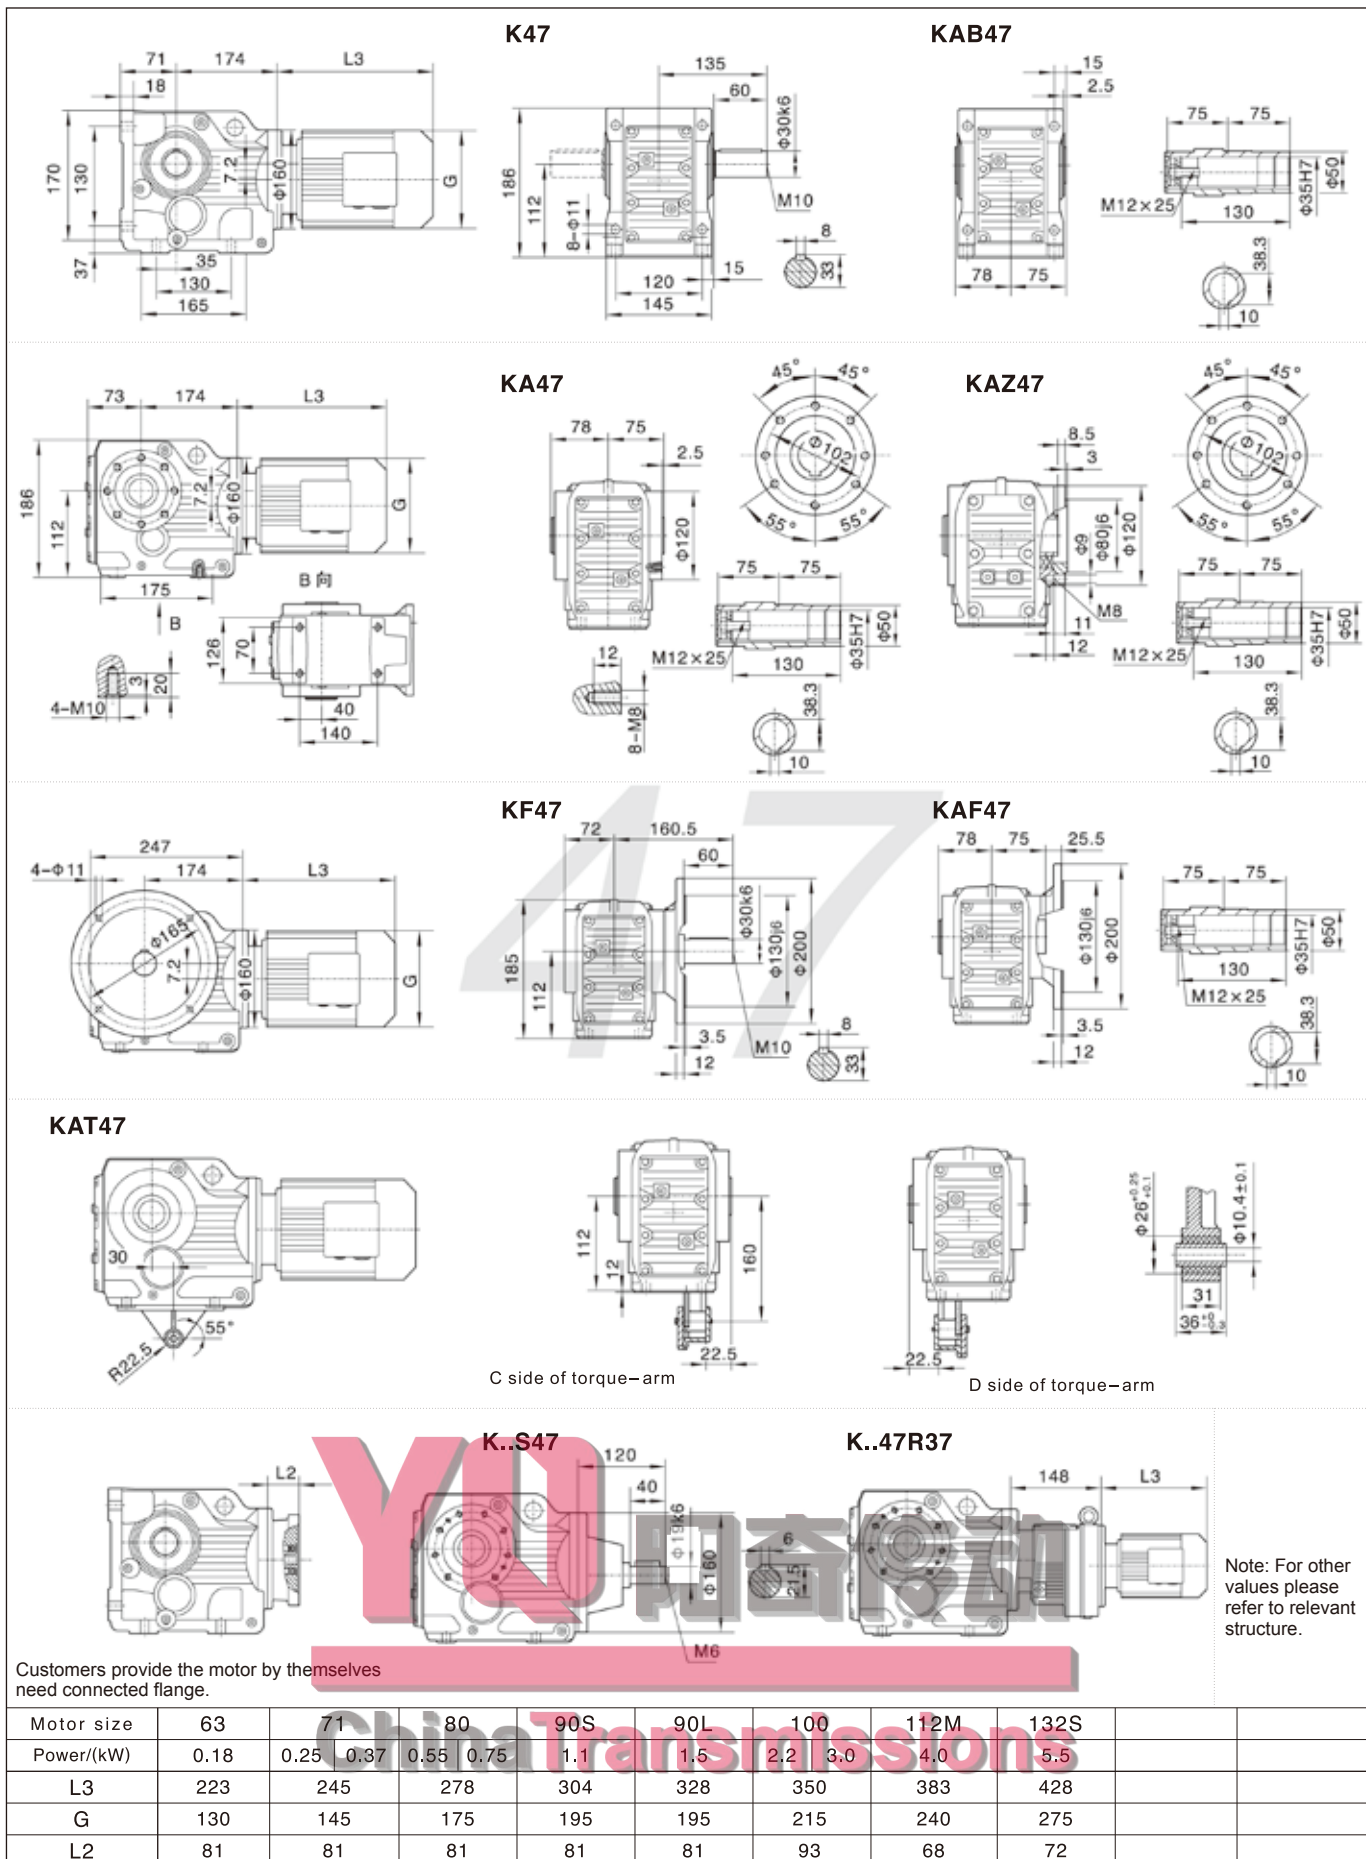


Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2. "K..." means K, KA, KF, KAF, KAZ, KAB.

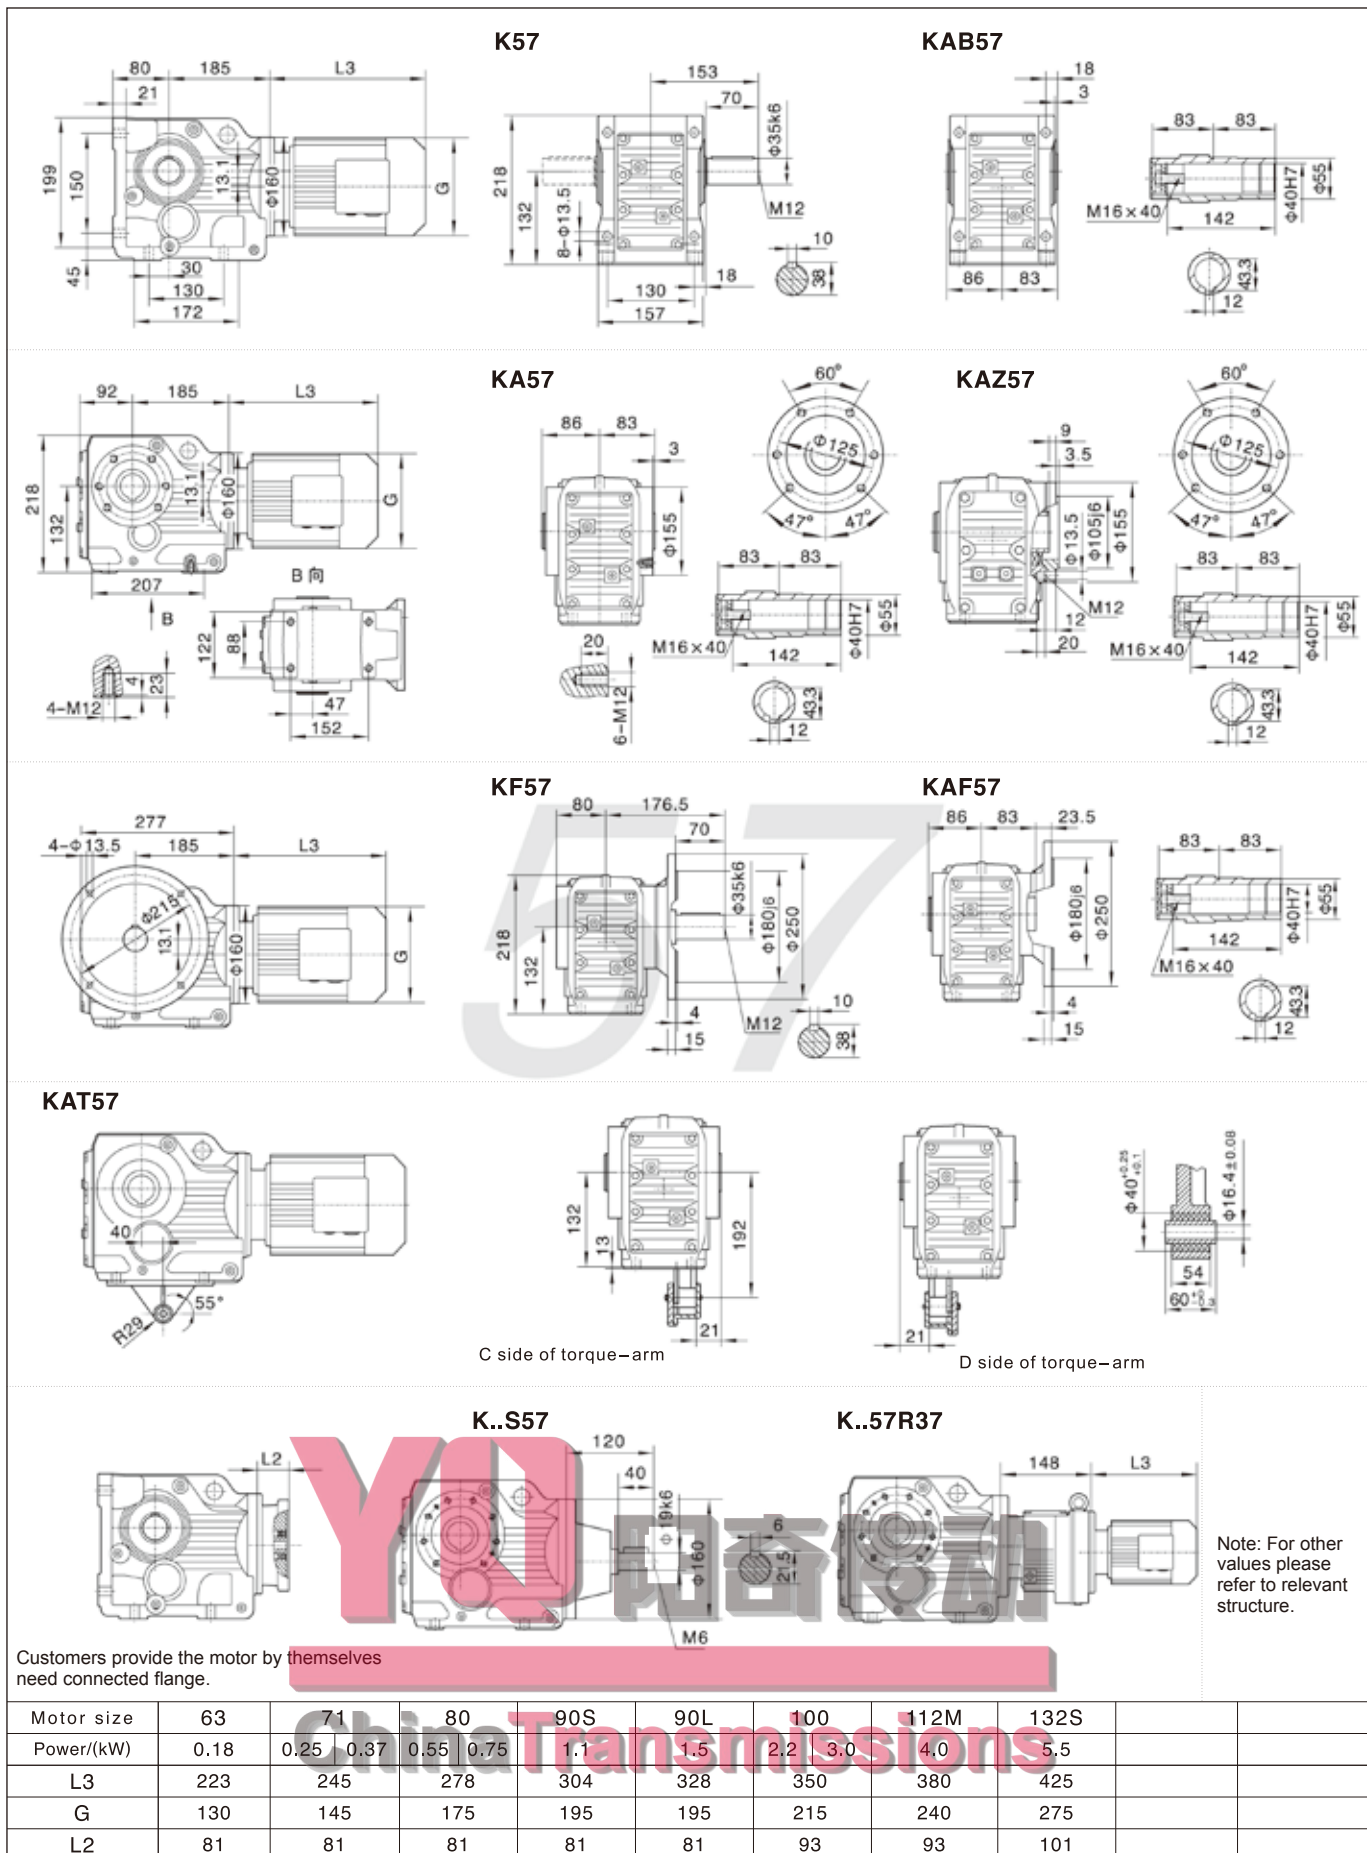


Note: 1. The housings of KA, KF, KAF, KAZ are common parts. The mounting dimensions may consult each other. 2. "K..." means K, KA, KF, KAF, KAZ, KAB.

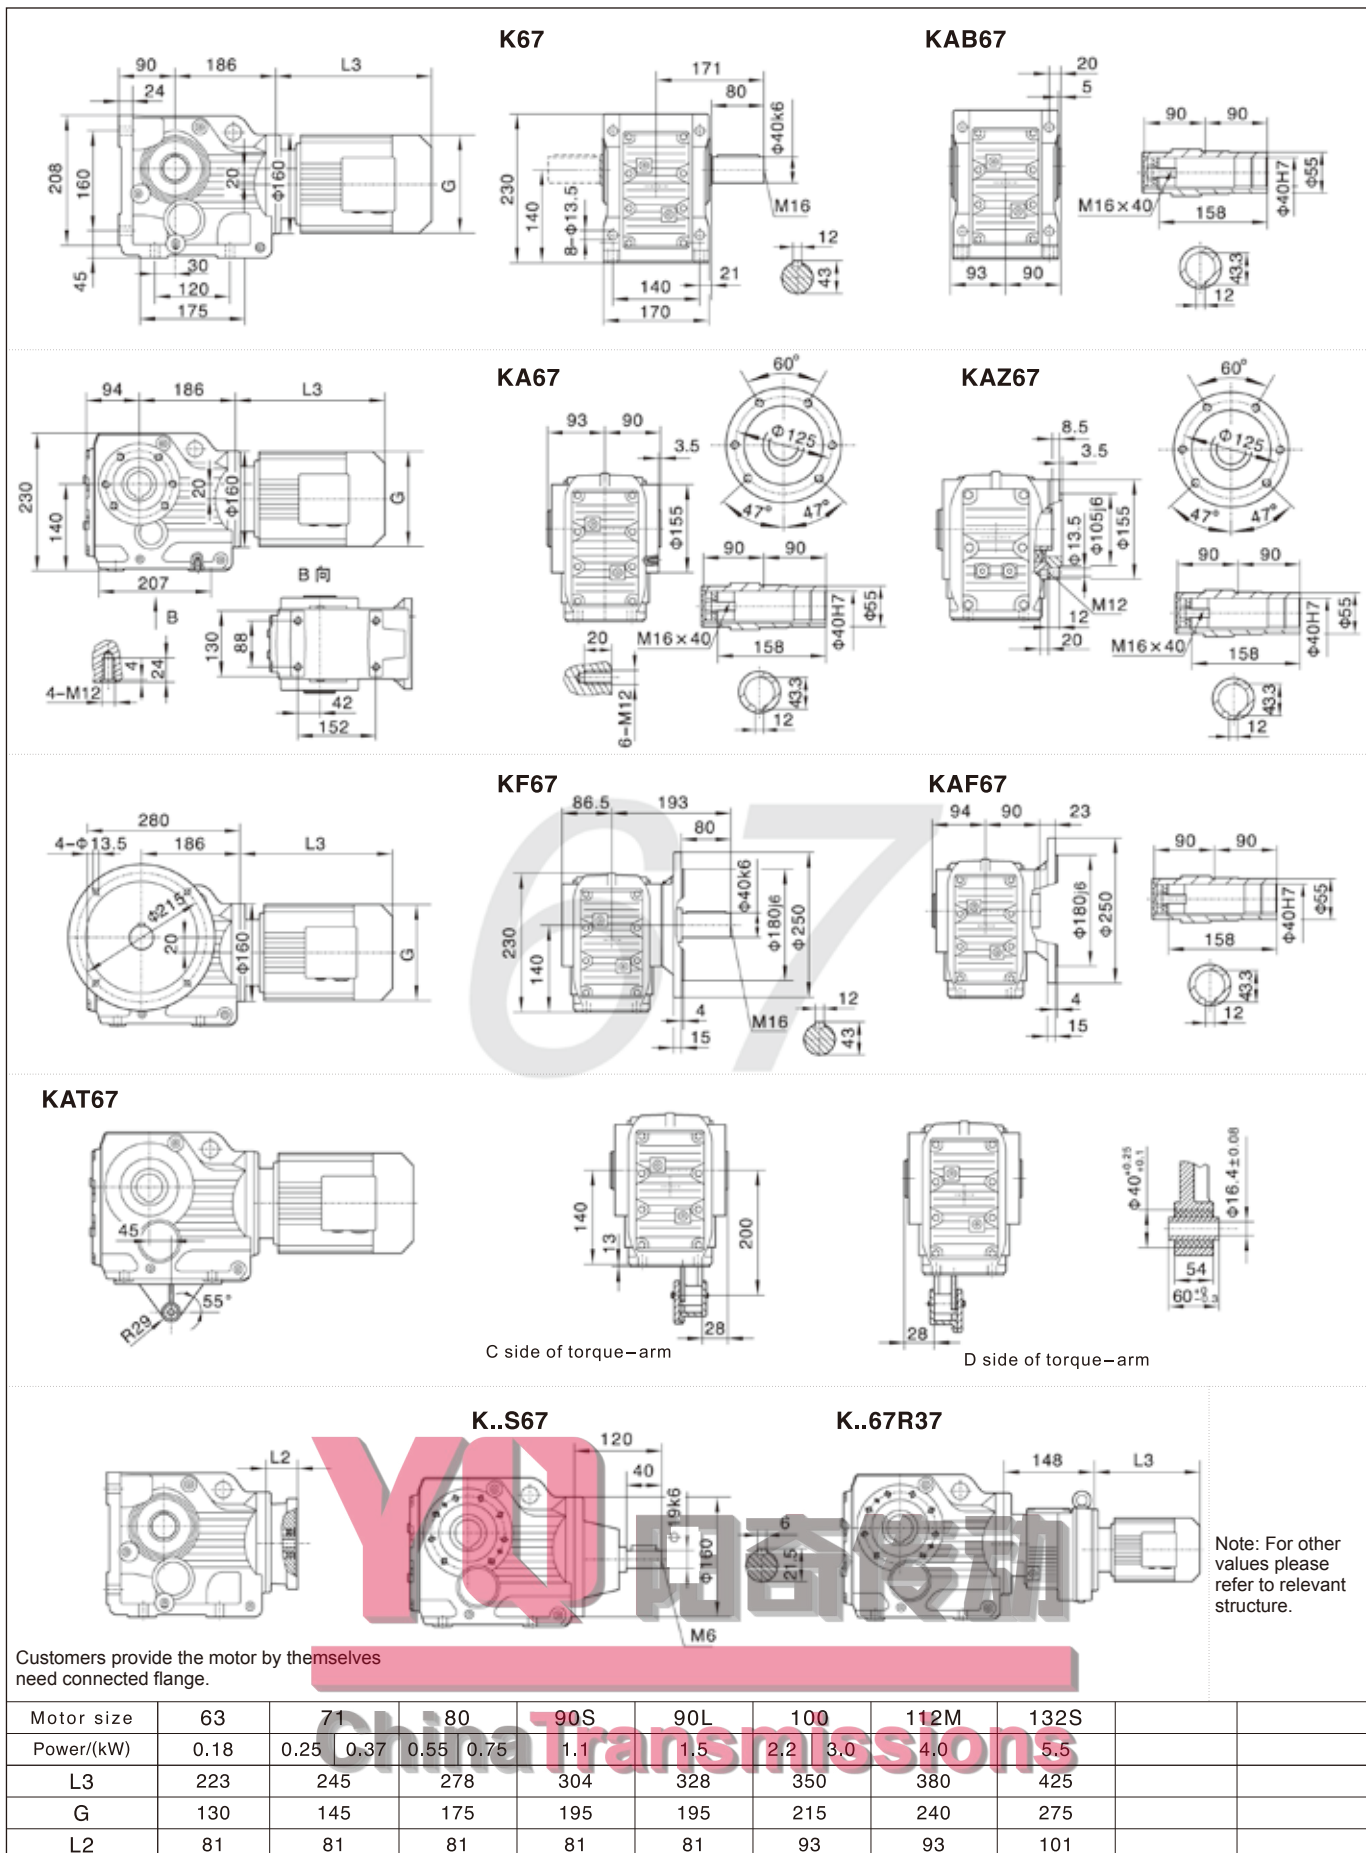

Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2. "K..." means K, KA, KF, KAF, KAZ, KAB.

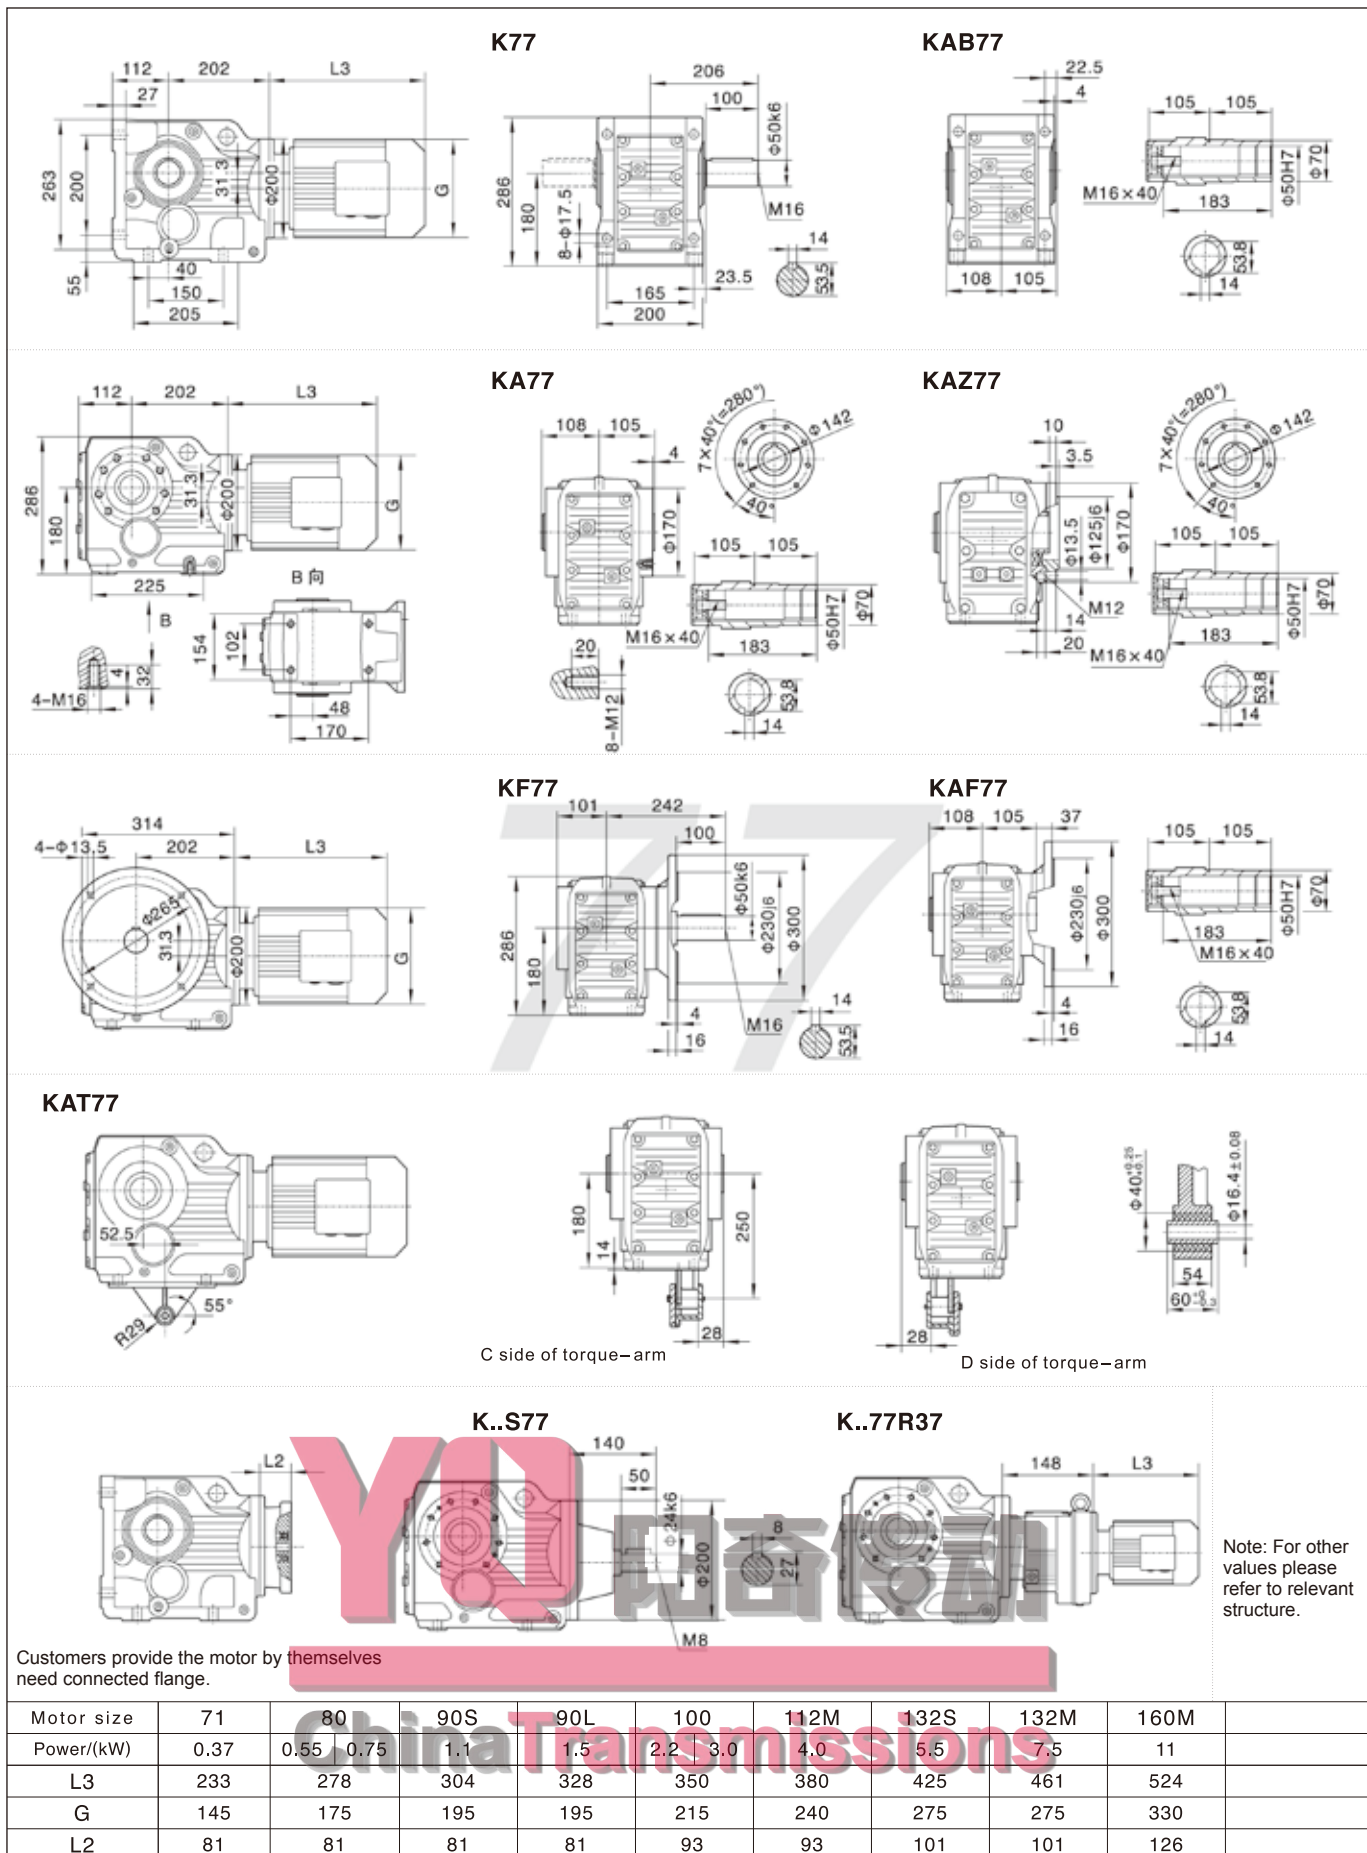

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2. "K..." means K, KA, KF, KAF, KAZ, KAB.

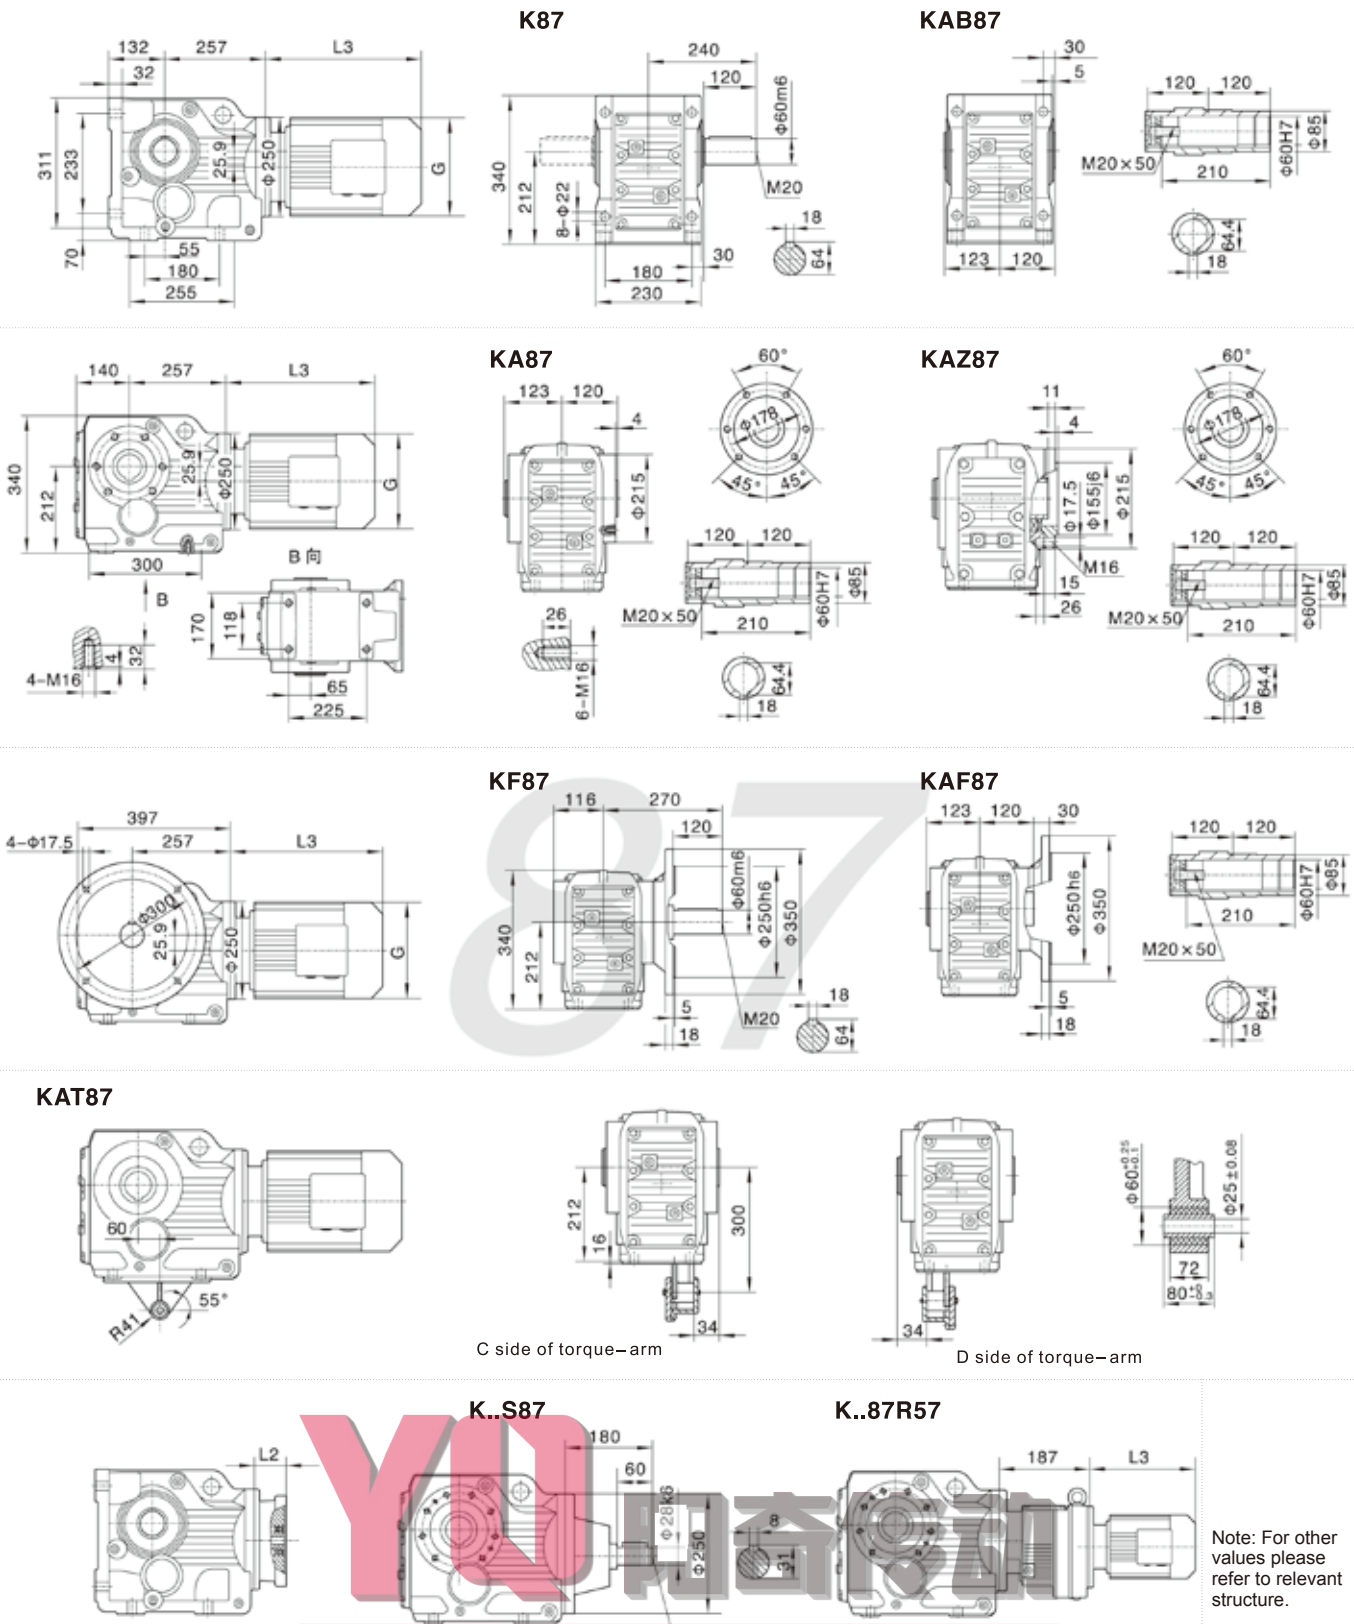

Customers provide the motor by themselves
need connected flange.

Motor size	80	90S	90L	100	112M	132S	132M	160M	160L	180M	180L
Power/(kW)	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11	15	22
L3	246	280	304	350	380	425	461	524	547	583	616
G	175	195	195	215	240	275	275	330	330	380	380
L2	86	86	86	71	71	101	101	126	126	126	126

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2. "K..." means K, KA, KF, KAF, KAZ, KAB.

K97

KAB97

KA97

KAZ97

KF97

KAF97

KAT97

C side of torque-arm

D side of torque-arm

K..S97


K..97R57

Note: For other values please refer to relevant structure.


Customers provide the motor by themselves need connected flange.

Motor size	90S	90L	100	112M	132S	132M	160M	160L	180M	180L	200	
Power/(kW)	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11	15	18.5	22	30
L3	280	304	315	334	425	461	524	547	555	588	652	
G	195	195	215	240	275	275	330	330	380	380	420	
L2	86	86	101	101	101	101	126	126	126	126	132	




Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2. "K..." means K, KA, KF, KAF, KAZ, KAB.

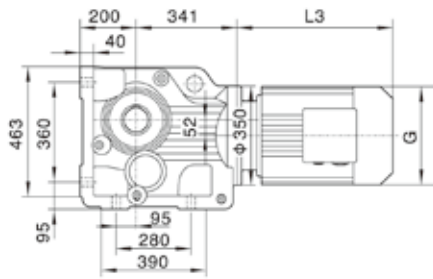



K107




KAB107

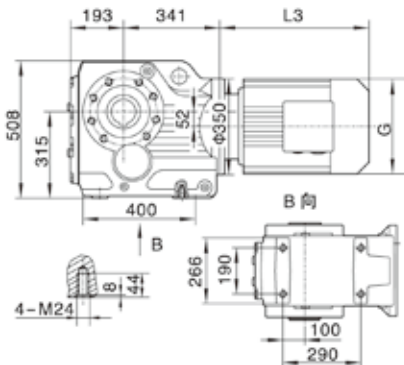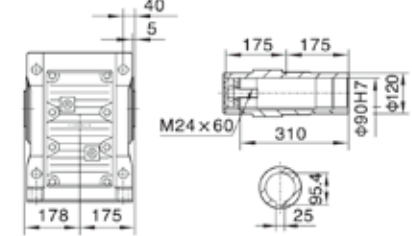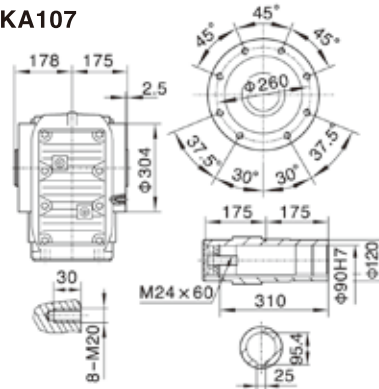**KA107**




KAZ107

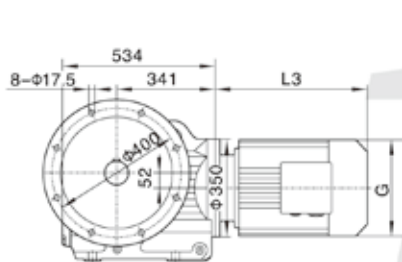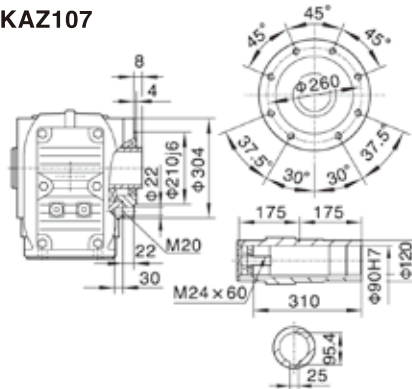


KF107

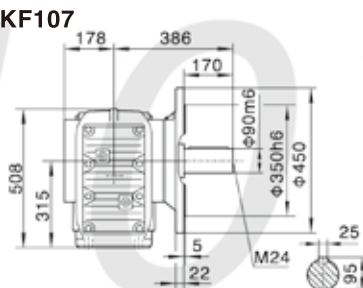


KAF107

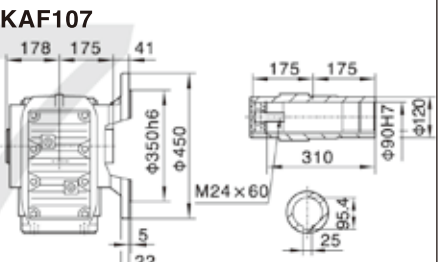**KAT107**


C side of torque-arm



D side of torque-arm



K..S107

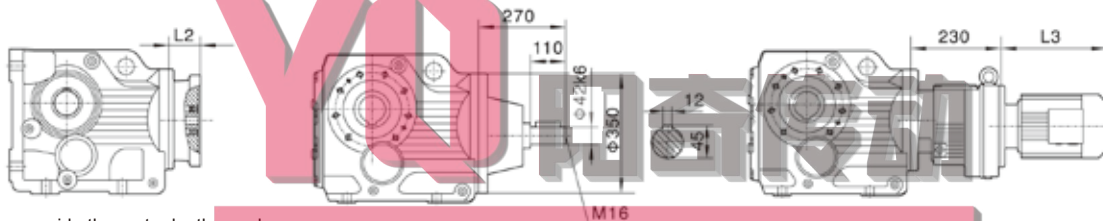

K..107R77

Customers provide the motor by themselves
need connected flange.

Note: For other values please refer to relevant structure.

Motor size	100	112M	132S	132M	160M	160L	180M	180L	200	225S	225M
Power/(kW)	3.0	4.0	5.5	7.5	11	15	18.5	22	30	37	45
L3	318	334	386	422	504	519	555	588	654	680	702
G	215	240	275	275	330	330	380	380	420	470	470
L2	101	101	101	101	126	126	126	126	132	132	132

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2. "K..." means K, KA, KF, KAF, KAZ, KAB.

K127

KA(KAB)127

KAZ127

KA127/KAF127/KAZ127
空心轴/Hollow shaft

KF127

KAF127

KAT127

C side of torque-arm

D side of torque-arm

K..S127

K..127R77(R87)


Note: For other values please refer to relevant structure.

Customers provide the motor by themselves need connected flange.



	K..127R77	K..127R87
L	232	275

Motor size	132M	160M	160L	180M	180L	200	225S	225M	250	280S	280M
Power/(kW)	7.5	11	15	18.5	22	30	37	45	55	75	90
L3	424	567	602	583	616	654	674	696	775	847	847
G	275	330	330	380	380	420	470	470	510	580	580
L2	132	132	132	132	132	132	143	143	174	174	174


Note: 1. The housings of KA, KF, KAF, KAZ are common parts. The mounting dimensions may consult each other. 2. "K..." means K, KA, KF, KAF, KAZ, KAB.

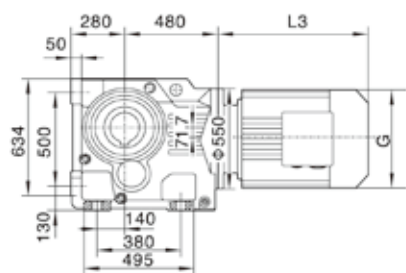


K157

**KA(KAB)157**


KAZ157

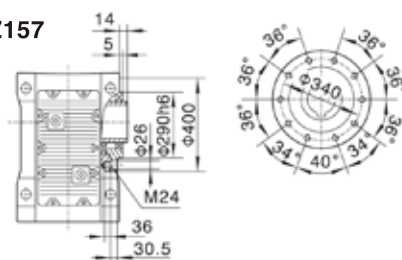





KA157/KAF157/KAZ157
Hollow shaft




KF157

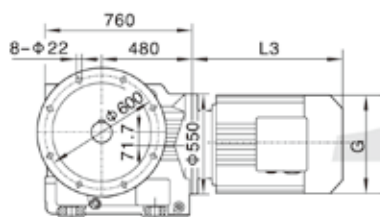


KAF157

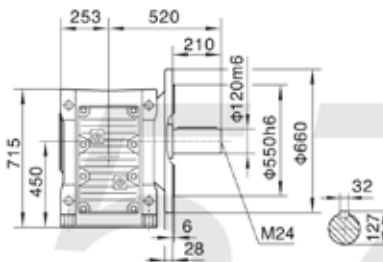**KAT157**


C side of torque-arm




D side of torque-arm



K..S157



K..157R97(R107)

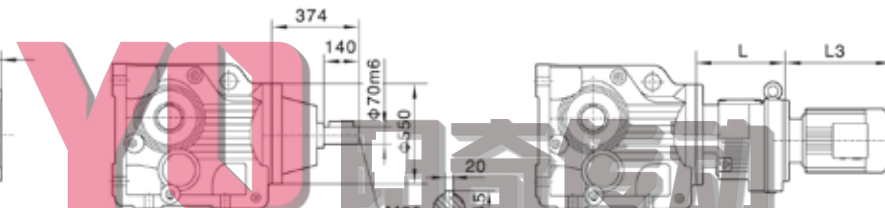



Note: For other values please refer to relevant structure.

Customers provide the motor by themselves
need connected flange.

[illegible]

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2. "K..." means K, KA, KF, KAF, KAZ, KAB.

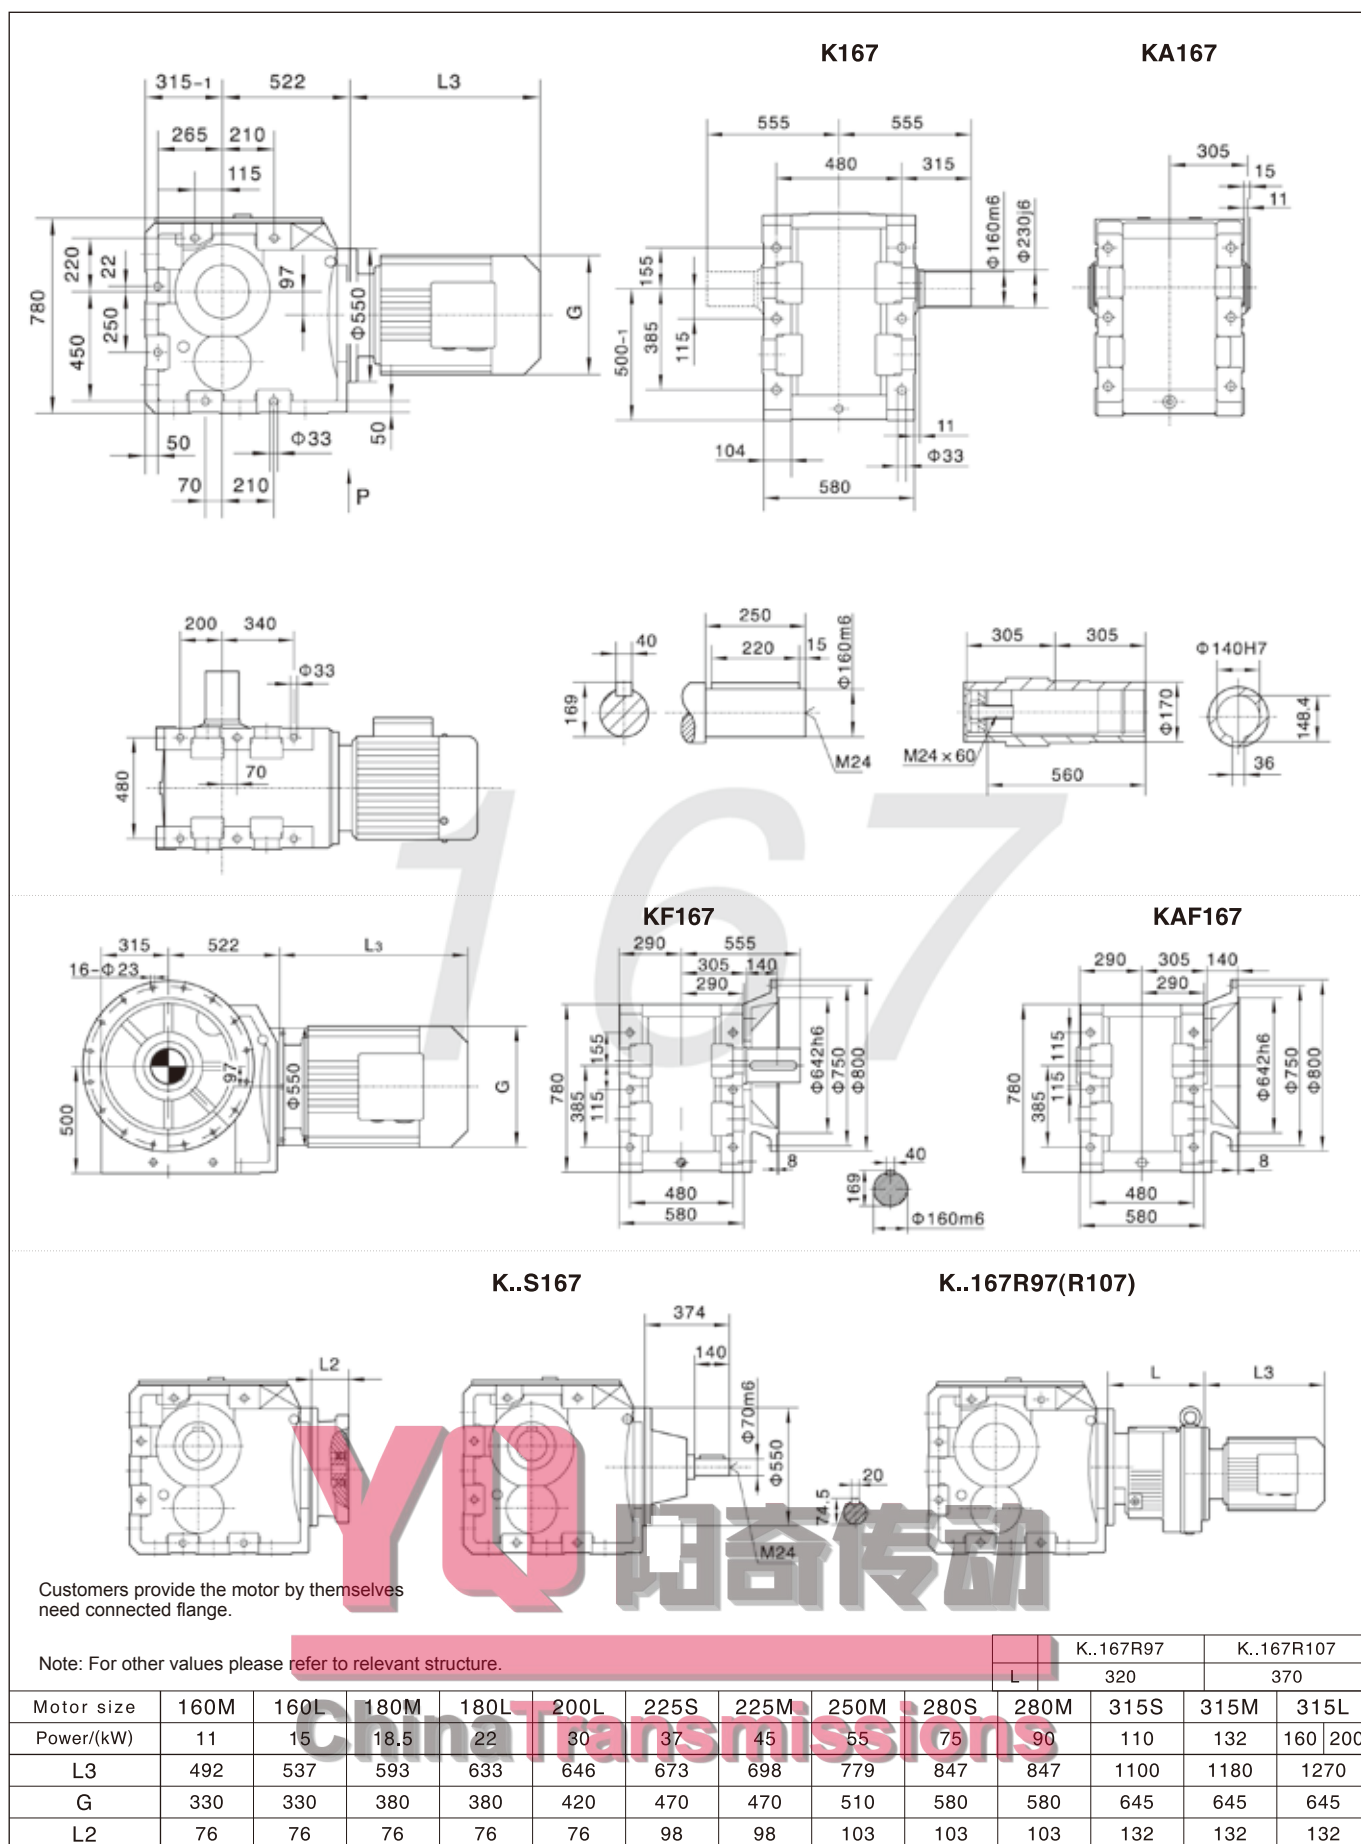

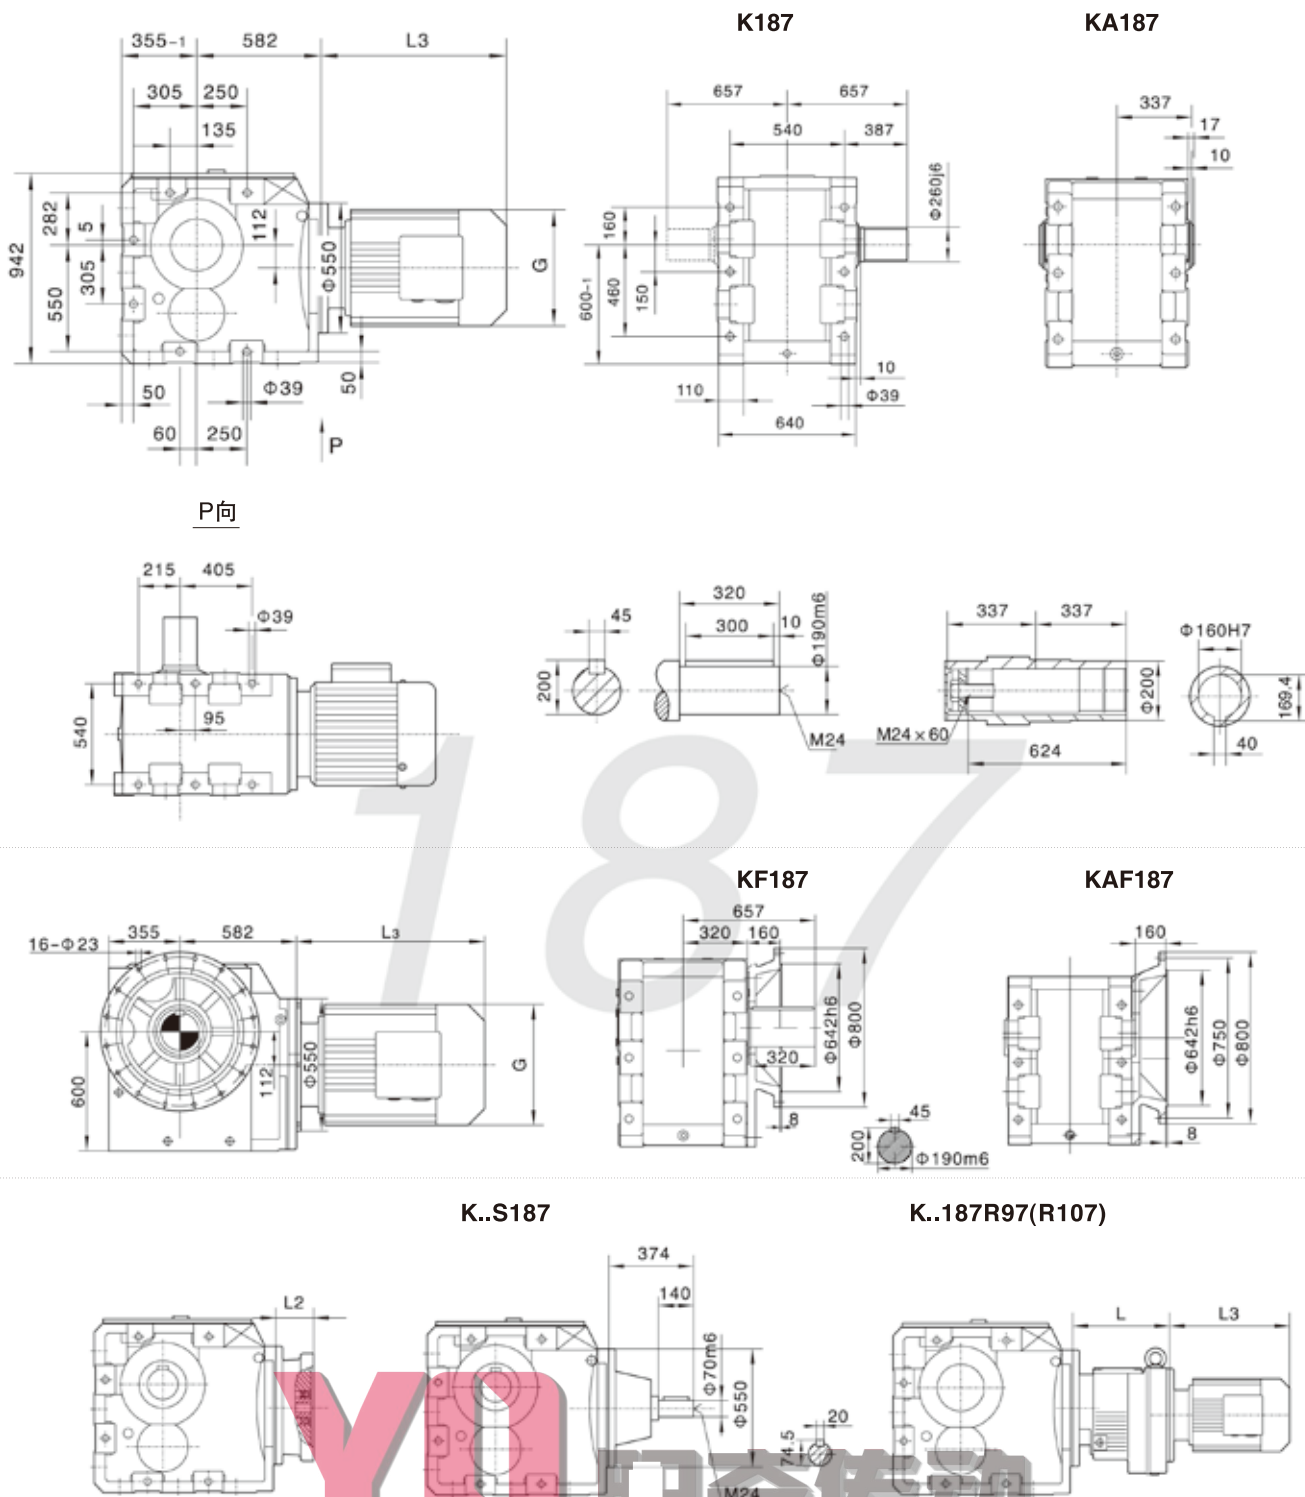

Customers provide the motor by themselves
need connected flange.

Note: For other values please refer to relevant structure.

Note: For other values please refer to relevant structure.											K..187R97		K..187R107	
										L	320		370	
Motor size	160M	160L	180M	180L	200L	225S	225M	250M	280S	280M	315S	315M	315L	
Power/(kW)	11	15	18.5	22	30	37	45	55	75	90	110	132	160 200	
L3	492	537	593	633	646	673	698	779	847	847	1100	1180	1270	
G	330	330	380	380	420	470	470	510	580	580	645	645	645	
L2	76	76	76	76	76	98	98	103	103	103	132	132	132	

Note: 1. The housings of KA, KF, KAF, KAZ are common parts. The mounting dimensions may consult each other. 2. "K..." means K, KA, KF, KAF, KAZ, KAB.

The figure displays eight technical drawings of shaft-hub connections, labeled KH..37.. through KH..107.. Each drawing shows a cross-sectional view of the assembly with various dimensions specified in millimeters (mm). The dimensions include overall length, hub length, shaft diameter, hub bore diameter, and key dimensions.

- KH..37..**: Overall length 151 mm, hub length 31 mm, shaft diameter $\Phi 30H7$, hub bore diameter $\Phi 30h6$, key width 20 mm, hub bore diameter $\Phi 45$, shaft diameter $\Phi 30h6$, hub bore diameter $\Phi 30h6$, key width 36 mm, hub length 25 mm, shaft diameter $\Phi 30h6$.
- KH..47..**: Overall length 180 mm, hub length 32 mm, shaft diameter $\Phi 35H7$, hub bore diameter $\Phi 35h6$, key width 20 mm, hub bore diameter $\Phi 50$, shaft diameter $\Phi 35h6$, hub bore diameter $\Phi 35h6$, key width 37 mm, hub length 25 mm, shaft diameter $\Phi 35h6$.
- KH..57..**: Overall length 200 mm, hub length 26 mm, shaft diameter $\Phi 40H7$, hub bore diameter $\Phi 40h6$, key width 20 mm, hub bore diameter $\Phi 55$, shaft diameter $\Phi 40h6$, hub bore diameter $\Phi 40h6$, key width 31 mm, hub length 25 mm, shaft diameter $\Phi 40h6$.
- KH..67..**: Overall length 215 mm, hub length 38 mm, shaft diameter $\Phi 40H7$, hub bore diameter $\Phi 40h6$, key width 20 mm, hub bore diameter $\Phi 55$, shaft diameter $\Phi 40h6$, hub bore diameter $\Phi 40h6$, key width 43 mm, hub length 25 mm, shaft diameter $\Phi 40h6$.
- KH..77..**: Overall length 250 mm, hub length 36 mm, shaft diameter $\Phi 50H7$, hub bore diameter $\Phi 50h6$, key width 30 mm, hub bore diameter $\Phi 70$, shaft diameter $\Phi 50h6$, hub bore diameter $\Phi 50h6$, key width 41 mm, hub length 35 mm, shaft diameter $\Phi 50h6$.
- KH..87..**: Overall length 281 mm, hub length 41 mm, shaft diameter $\Phi 65H7$, hub bore diameter $\Phi 65h6$, key width 40 mm, hub bore diameter $\Phi 85$, shaft diameter $\Phi 65h6$, hub bore diameter $\Phi 65h6$, key width 46 mm, hub length 45 mm, shaft diameter $\Phi 65h6$.
- KH..97..**: Overall length 345 mm, hub length 55 mm, shaft diameter $\Phi 75H7$, hub bore diameter $\Phi 75h6$, key width 50 mm, hub bore diameter $\Phi 95$, shaft diameter $\Phi 75h6$, hub bore diameter $\Phi 75h6$, key width 60 mm, hub length 55 mm, shaft diameter $\Phi 75h6$.
- KH..107..**: Overall length 410 mm, hub length 65 mm, shaft diameter $\Phi 85H7$, hub bore diameter $\Phi 90H7$, key width 60 mm, hub bore diameter $\Phi 120$, shaft diameter $\Phi 85h6$, hub bore diameter $\Phi 90h6$, key width 75 mm, hub length 70 mm, shaft diameter $\Phi 90h6$.

Dimensions of shrink disc

