


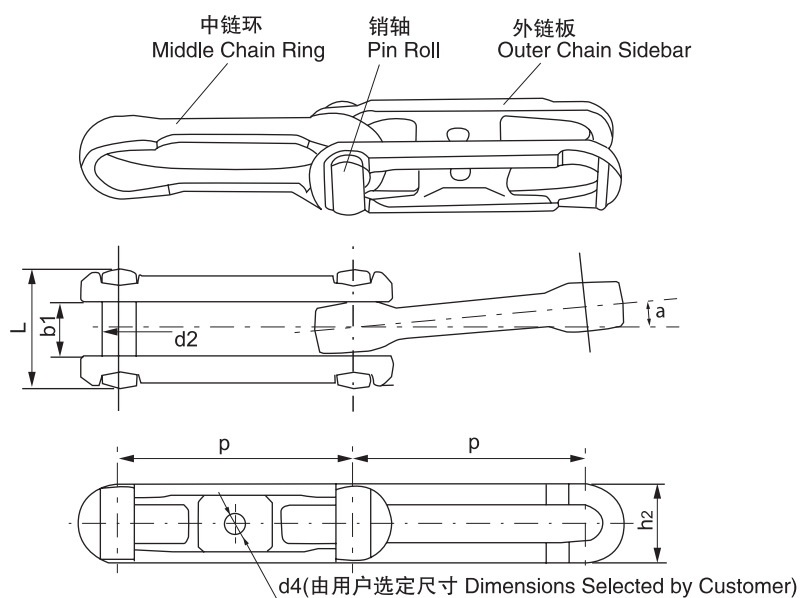
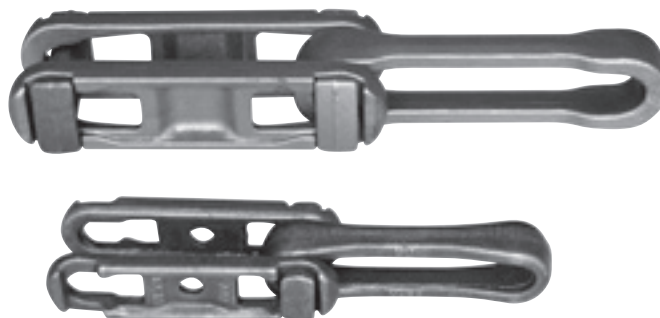


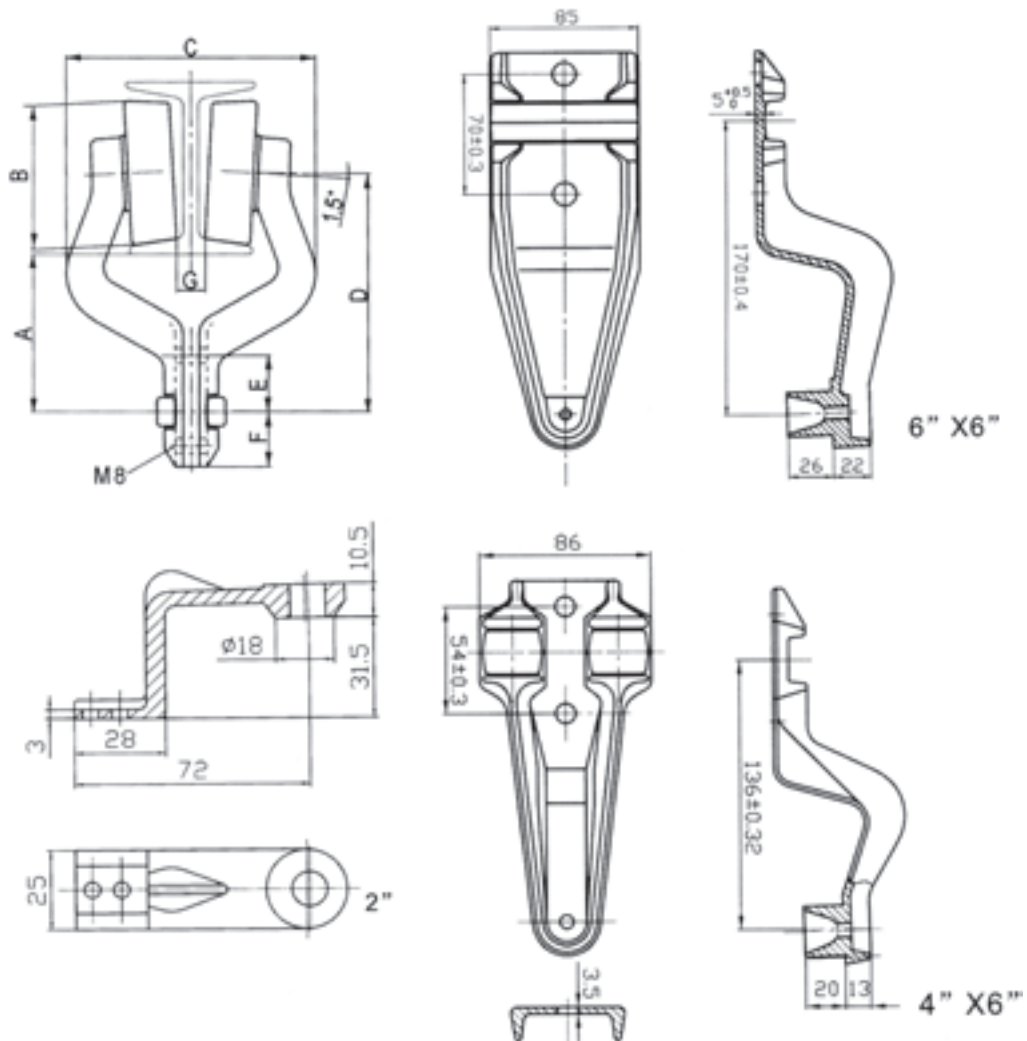




	链号 Chain No.	参考节距 Eeferenced pitch P (mm)	销轴直径 Diameter of pin d2 (mm)	销轴长度 Length of pin L (mm)	标准测量长度 Standard measurement length (min/max) (mm)	标准测量长度的 节距数 Number of pitch of standard measurement length	侧向转角 Side corner α (°)	链板宽度 Width of sidebar h2 (mm)	抗拉强度 Tensile strength (KN)	每米重量 Weight per meter (kg/m)
英制系列 British system series	X348	76.6	12.7	47	3050.5/3095.2	40	9	27	98	2.7
	X458	102.4	16	58	3063.1/3090.2	30	9	35	187	5.2
	468H	102.4	19.5	84.1	3063.1/3090.2	30	9	47.8	311.7	11.5
	X678	153.2	22.3	77	3055.1/3082.8	20	7	51.6	318	9.5
	698	153.2	28	95.3	3055.1/3082.8	20	7	60	515	17.0
	698H	152.4	39	154	3039.2/3066.6	20	7	72	1078	37.7
公制系列 Metric system series	F100X16	100.0	15.5	77	2991.3/3018.3	30	9	35	187	4.7
	F100X17	100.0	17	77	2991.3/3018.3	30	9	35	187	4.0
	F160X24	160.0	23.5	96	3190.7/3219.5	20	7	51.6	318	10.3


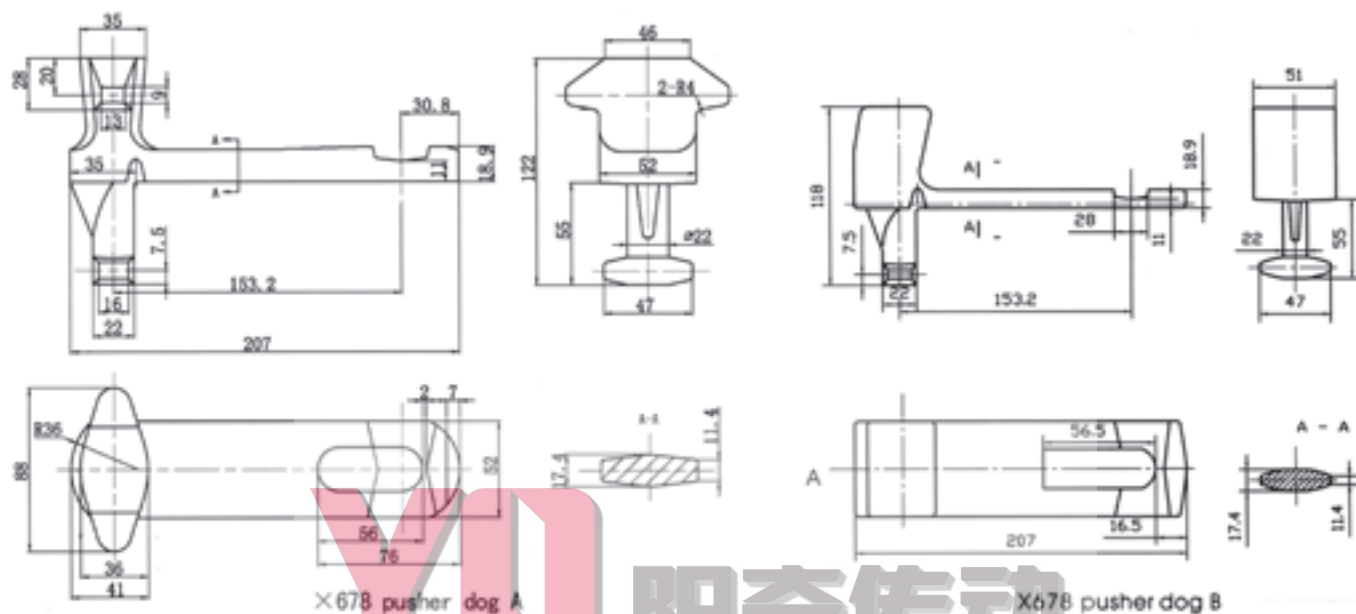


链号 Chain No.	参数 Dimensions							每节重量 Weight per meter (kg/set)
	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	
348	64.0	60.	100.0	100.0	25.5	22.5	16	1.35
458	82.0	80.0	136.0	128.6	33.5	20.5	20	2.70
678	89.0	82.0	144.0	136.0	31.0	23	16	3.45
CC100	82.0	82.0	136.0	128.6	25.5	22.5	18	2.70
160	101.6	120.0	170.0	170.0	42.0	28	20	7.50


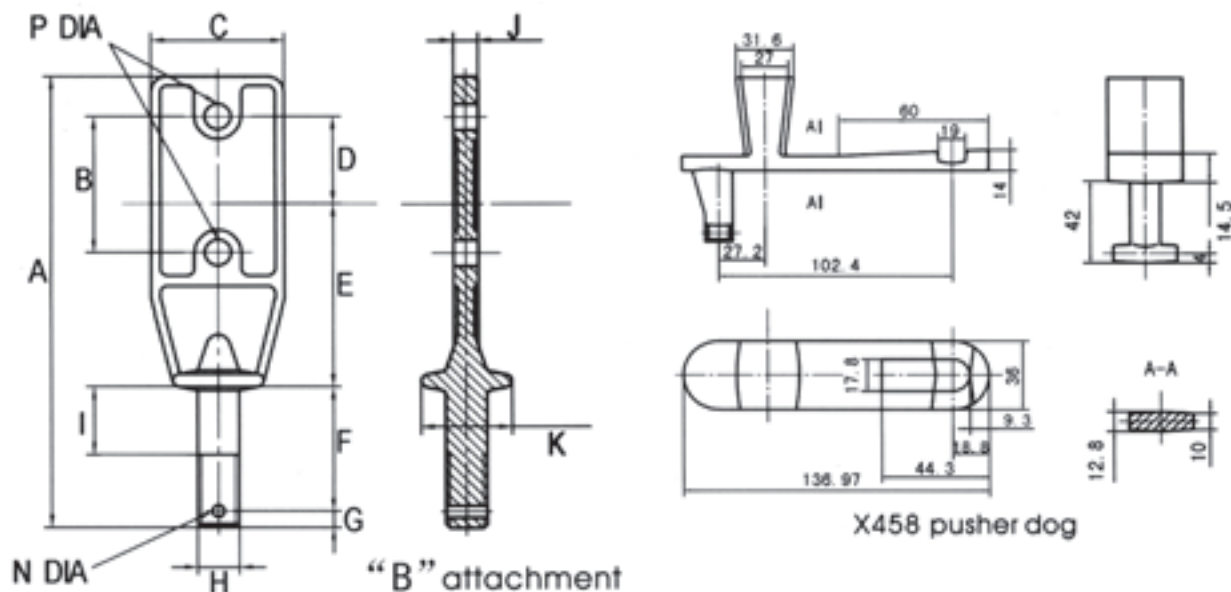


型号 Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	K (mm)	L (mm)	N (mm)	P (mm)	Wt (kg)
348	146	48	38.1	26	62	40	6	12	15	6.4	32	M12	4	9	0.22
458	178	54	50	33.5	71.5	52	6	16	32	9.5	35	M16	4	10.5	0.45
678	222	70	76	41.5	79	67	9.5	22	41.2	12.7	51	M22	5.5	13.5	1.27

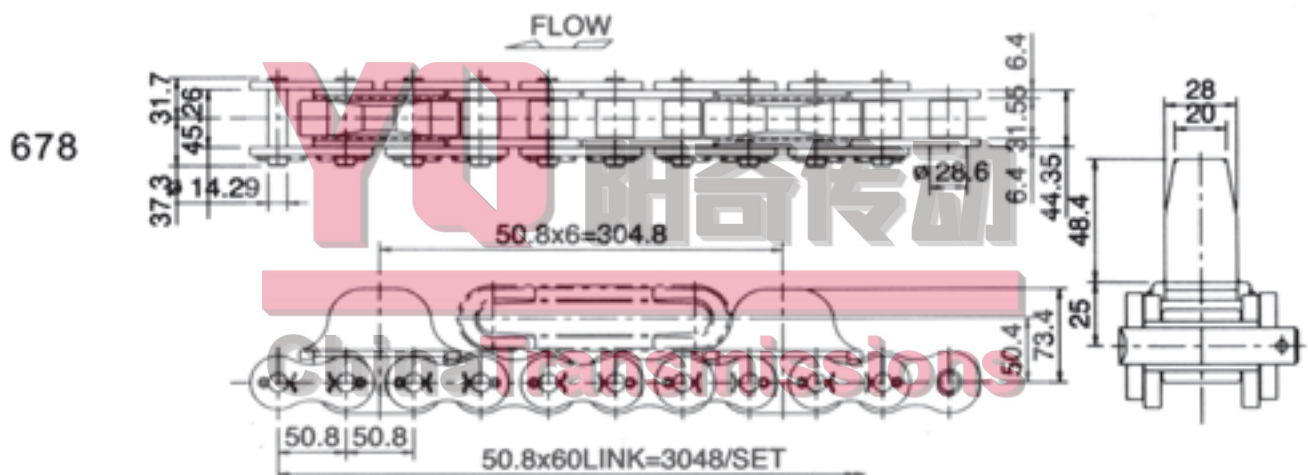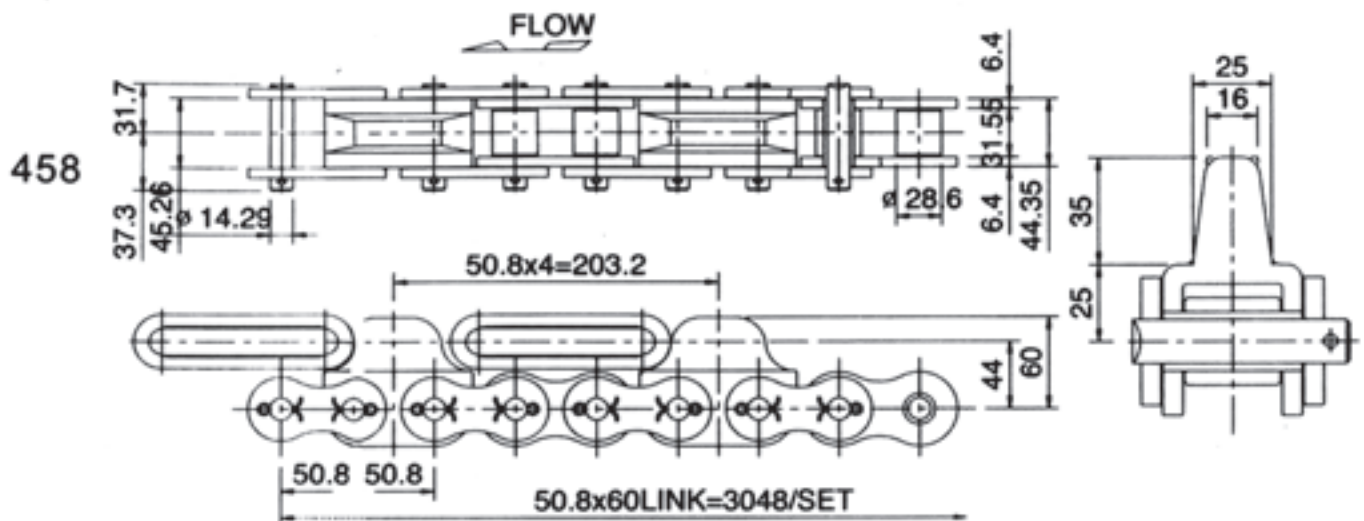
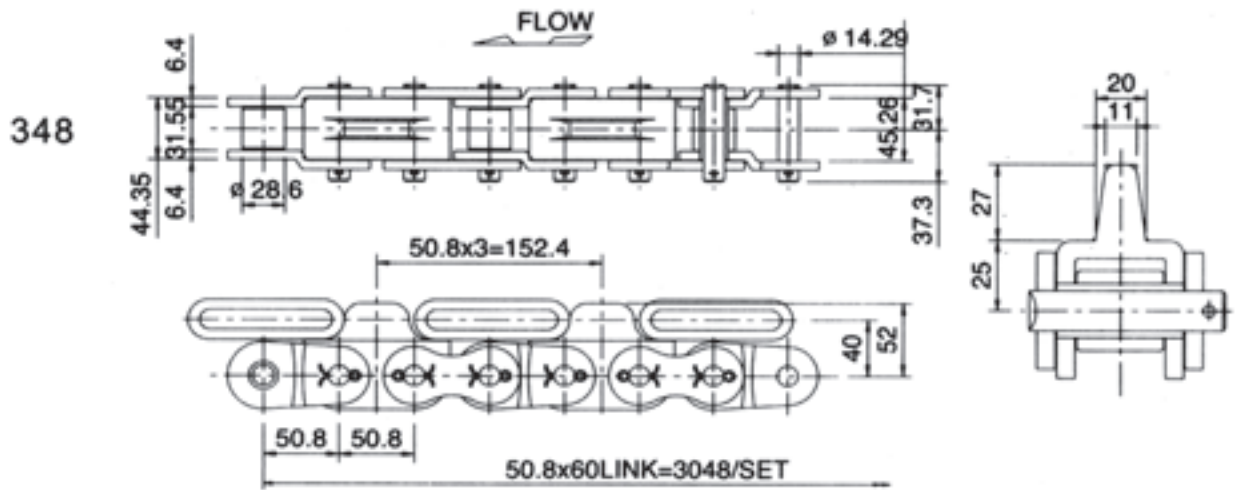


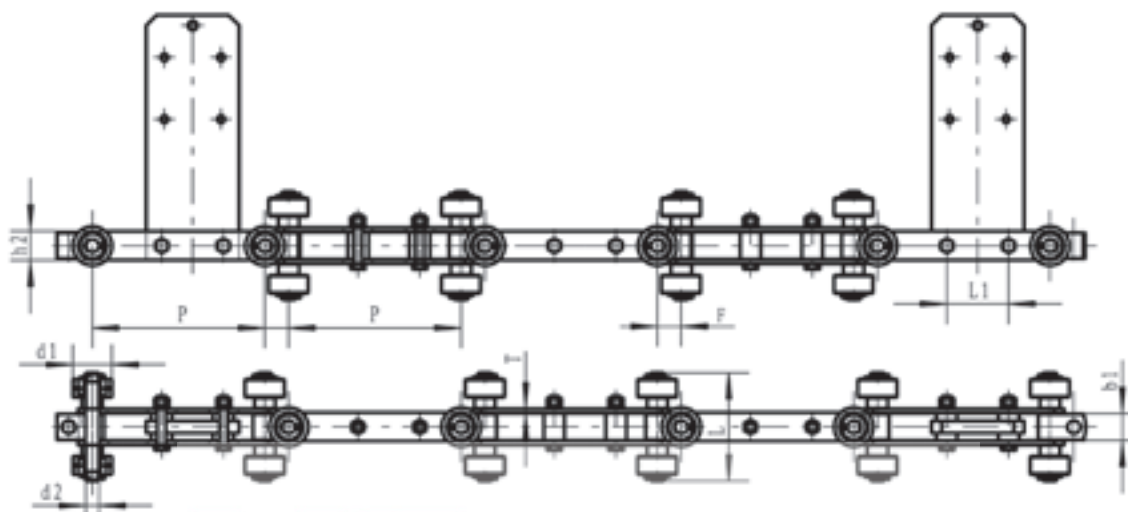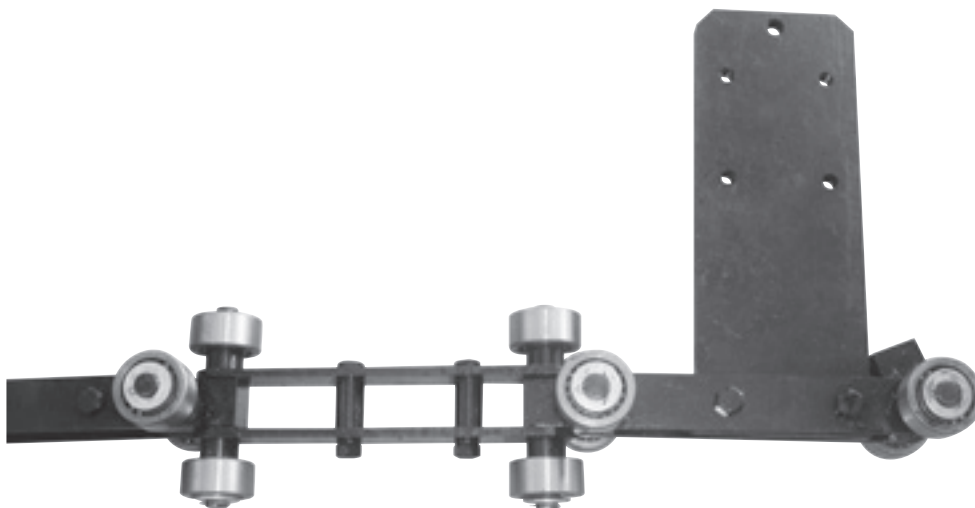



节距 Pitch P (mm)	内节内宽 Inner width of inner link b1 (mm)	滚子直径 Diameter of roller d1 (mm)	销轴直径 Diameter of pin d2 (mm)	销轴长度 Length of pin L (mm)	链板高度 Height of sidebar h2 (mm)	链板厚度 Thickness of sidebar T (mm)	附板孔距 Hoe distance of attachment L1 (mm)	铰接块孔距 Hoe distance of articulated block F (mm)	抗拉强度 Tensile strength Q (KN)
190.5	26	38	13	105	28	4.5	60	23.2	98
203.2	26	38	13	105	28	4.5	60	23.2	98

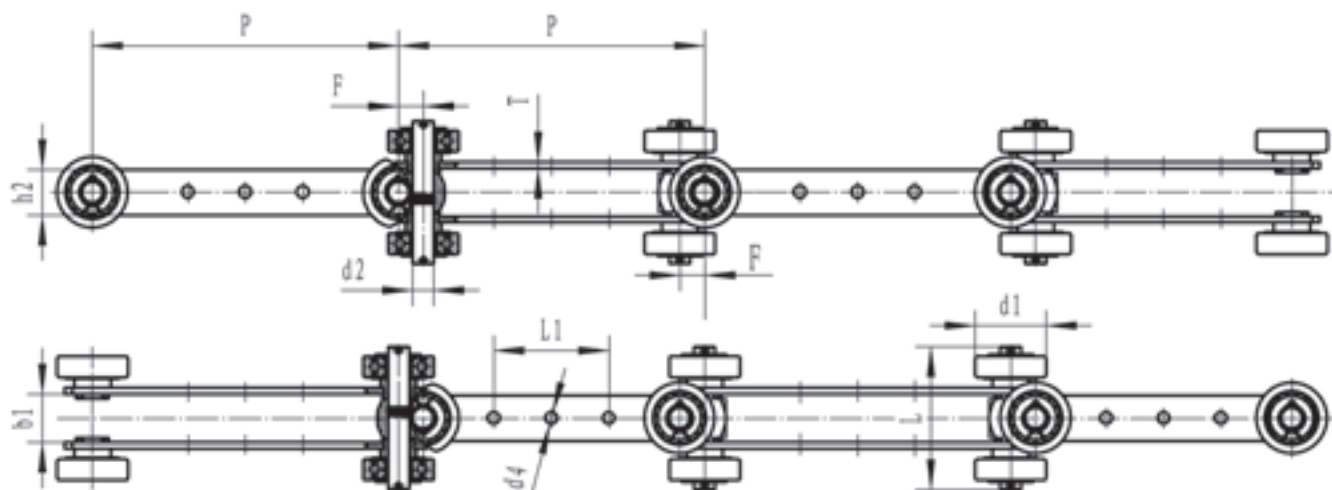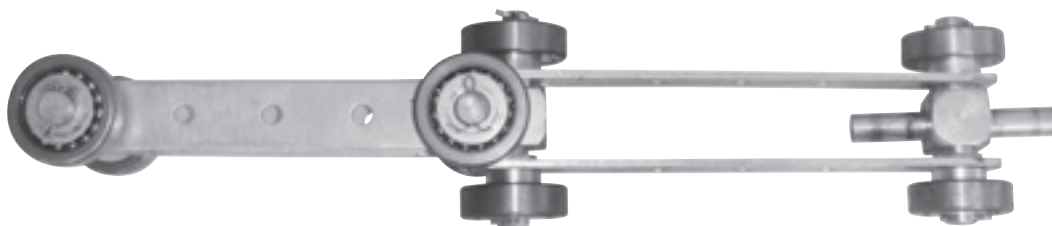


链号 Chain No.	节距 Pitch P (mm)	内节内宽 Inner width of inner link b1 (mm)	滚子直径 Diameter of roller d1 (mm)	销轴直径 Diameter of pin d2 (mm)	销轴长度 Length of pin L (mm)	链板高度 Height of sidebar h2 (mm)	链板厚度 Thickness of sidebar T (mm)	附板孔距 Hoe distance of attachment L1 (mm)	附板孔径 Hoe dia. of attachment d4 (mm)	铰接块孔距 Hoe distance of articulated block F (mm)	抗拉强度 Tensile strength Q (KN)
SJ400-40	200	20	30	9	65	20	3	88	6.44	20	15
SJ400-60	200	21	35	10	64.5	20	4	88	6.5	20	60
SJ400-100	200	26	40	14	75	30	4	88	10	25	100
SJ405S-60	203.2	30	47	14	95	30	4	76.2	8.4	16.5	50

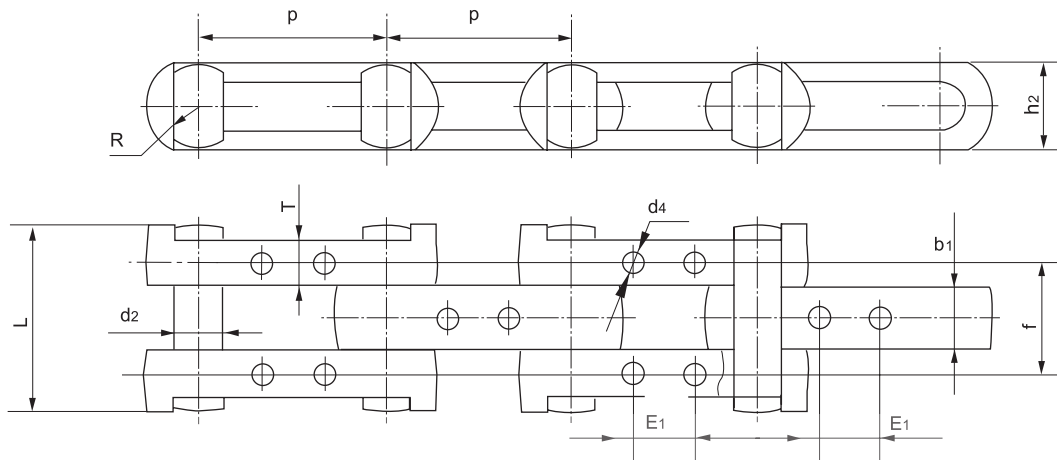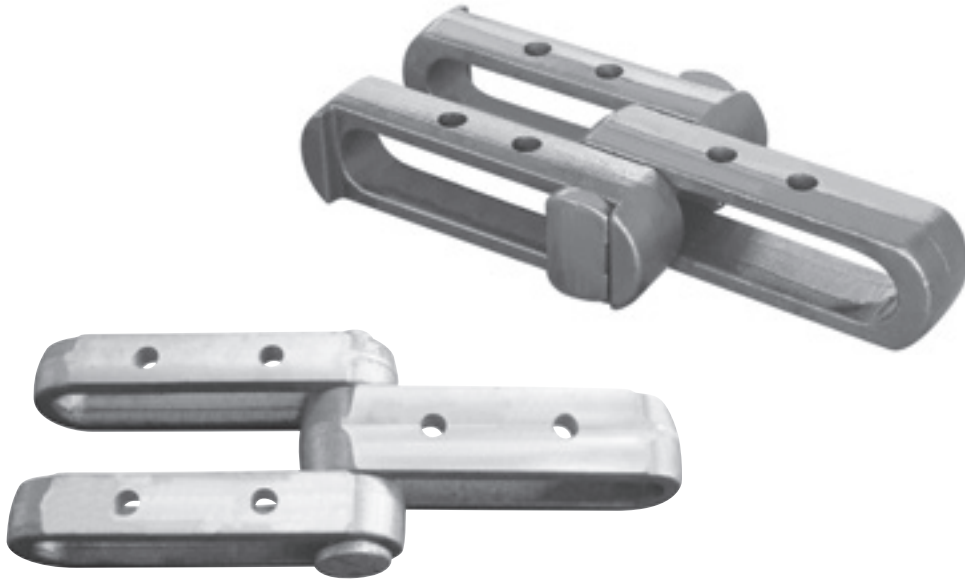


链号 Chain No.	参考节距 Referenced pitch P (mm)	销轴直径 Diameter of pin d2 (mm)	销轴长度 Length of pin L (mm)	标准测量长度 Standard measurement length (min/max) (mm)	标准测量长度的节距数 Number of pitch of standard measurement length	链板宽度 Width of sidebar h2 (mm)	抗拉强度 Tensile strength (KN)	每米重量 Weight per meter (kg/m)
GPB152.4	152.4	30	153	3039.2/3066.6	20	63	900	-
152.4KBJT	152.4	39	158	3039.2/3066.6	20	72	1078	38.7
P228.6	228.6	38	201	3419.6/3449.9	15	83	1225	-

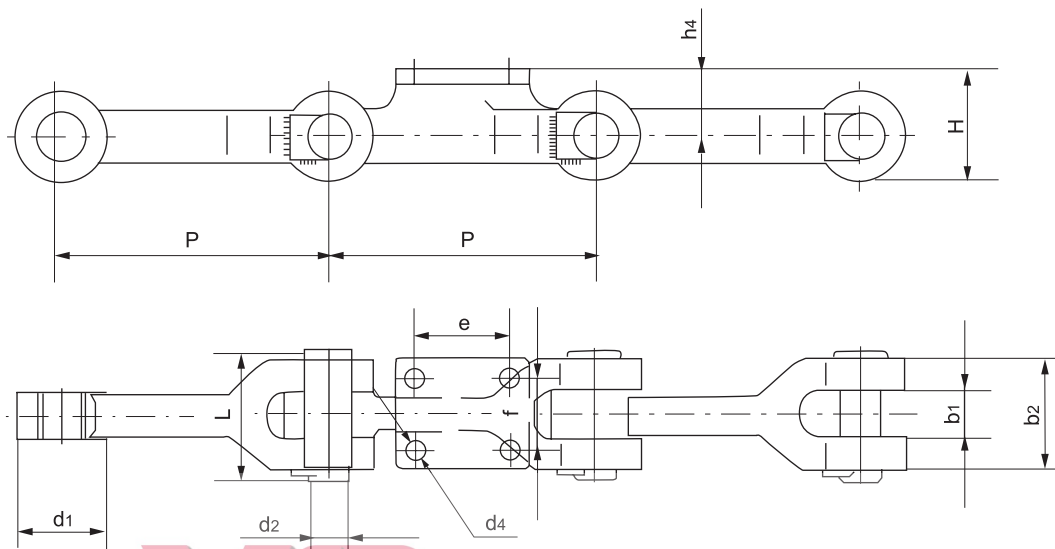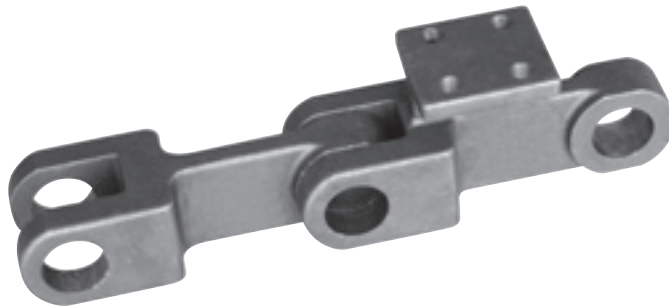



链号 Chain No.	节距 Pitch P (mm)	滚子直径 Diameter of roller d1(max) (mm)	内节内宽 Inner width of inner link b1(min) (mm)	外节外宽 Outer width of outer link b2(min) (mm)	其它参数 Other dimensions				链条高度 Height of chain H (mm)	销轴直径 Diameter of pin d2 (mm)	销轴长度 Length of pin L (mm)	抗拉强度 Tensile strength Q(min) (KN)	每米重量 Weight per meter q (kg/m)
					h4 (mm)	d4 (mm)	e (mm)	f (mm)					
RDC200	200	80	42	92	81.5	17	50	56	119	38.5	110.5	200	41.3
BDC304.8	304.8	101.6	54	127	76.2	17.5	108	82.6	127	44.5	146	880	48.8

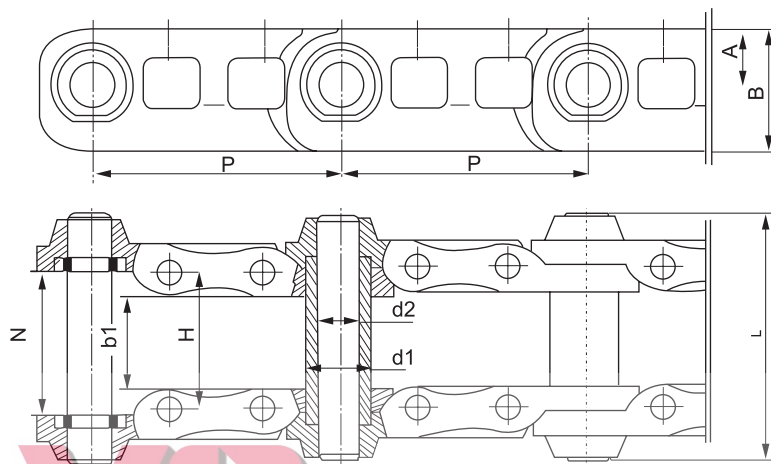


节距 Pitch P (mm)	轴套外径 Outer diameter of bushing $d1$ (mm)	销轴外径 Outer diameter of pin $d2$ (mm)	销轴长度 Length of pin L (mm)	抗拉强度 Tensile strength (KN)	刮板尺寸 Dimensions of scraper					每米重量 Weight per meter q (kg/m)
					$b1$ (mm)	N (mm)	A (mm)	B (mm)	H (mm)	
155.57	42.88	28.7	28.7	550	59.5	92	35	76.5	88.9	35
170.10	59.50	37.8	37.8	1000	84.0	130	45	102.0	122.4	60

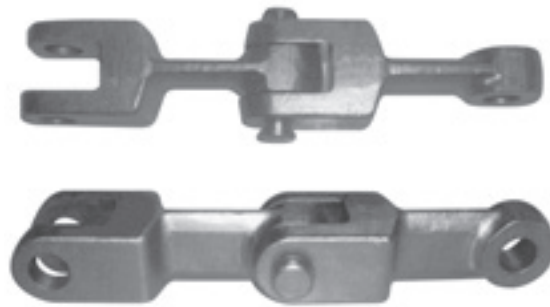

链号 Chain No.	节距 Pitch P (mm)	抗拉强度 Tensile strength Q(min) (KN)	每米重量 Weight per meter q (kg/m)
YD101	101.60	186	9.8
YD101	101.60	186	9.8
YD120	120.20	190	9.8
YD142	142.00	224	10.4
YD150	150.00	264	10.8
YD152	152.40	264	10.8
YD153	153.67	264	10.8
YD200	200.00	310	12.9

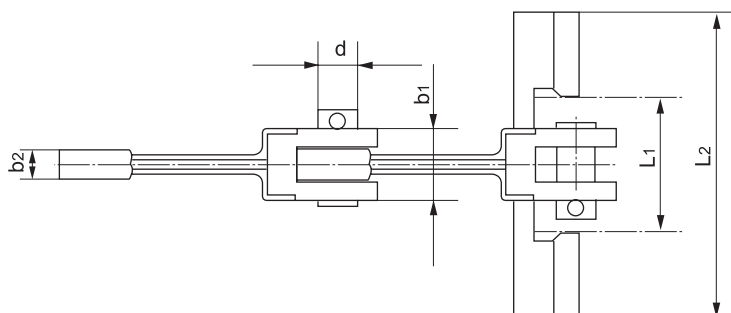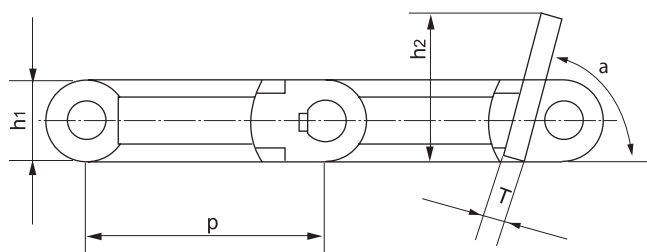


链号 Chain No.	节距 Pitch P (mm)	销轴直径 Diameter of pin d2 (mm)	链板高度 Height of sidebar h1 (mm)	链板厚度 Thickness of sidebar		刮板尺寸 Dimensions of scraper					抗拉强度 Tensile strength Q(min) (KN)
				b1 (mm)	b2 (mm)	L1 (mm)	L2 (mm)	h2 (mm)	α (°)	T (mm)	
YD640A	142	23	48	42	18	—	300	48	75	14	230.0
YD640C	142	25	50	54	22	80	590	50	90	14	262.4
YD640D	142	25	50	54	22	90	590	82	90	14	262.4
YD200	150	18	40	38	16	—	177	40	75	8	162.0
YD310	200	20	46	44	20	—	280	46	75	12	162.0

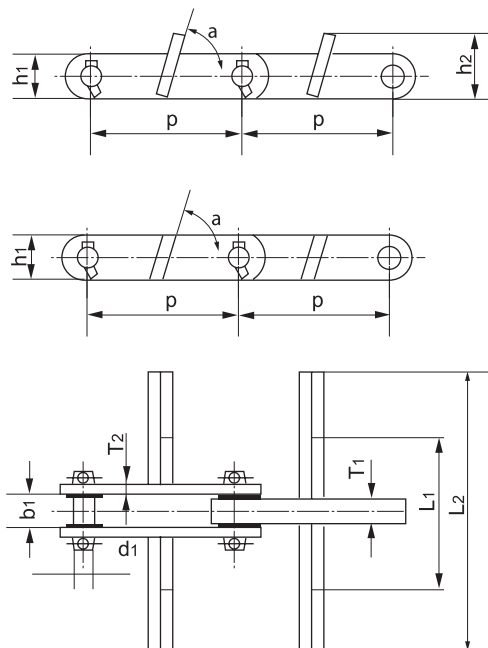


埋刮板链适用于粉末状、颗粒状及小块状的水泥、粉尘、谷物、砂石和煤炭等散状物料的运输设备。

The Buried Scraper Chain is suitable for conveyor device used in bulk materials such as cement, powder, grain powder, sand and coal in powder, pellet or small lump styles.


链号 Chain No.	节距 Pitch P (mm)	外节内宽 Inner width of outer link b1(min) (mm)	销轴直径 Diameter of pin d2 (mm)	链板高度 Height of sidebar h1 (mm)	链板厚度 Thickness of sidebar		刮板尺寸 Dimensions of scraper				抗拉强度 Tensile strength Q(min) (KN)
					内链板 Inner sidebar T1(mm)	外链板 Outer sidebar T2(mm)	L1 (mm)	L2 (mm)	h2 (mm)	α (°)	
GS31F	152.4	32.5	22	45	25.4	10	106	280	65.5	75	224.0
GS43F	152.4	34.0	22	45	28.0	12	115	400	80.5	90	224.0
DC200	152.4	32.5	22	45	25.4	10	—	160	—	75	224.0
DC250	152.4	32.5	22	45	25.4	10	106	210	65.5	75	224.0
DC310	152.4	32.5	22	45	25.4	10	106	270	65.5	75	224.0
DC450	200.0	41.0	22	80	35.0	14	150	400	121.3	75	600.0
DC250A	152.4	32.5	22	45	25.4	10	—	210	—	75	224.0
DC310A	152.4	32.5	22	45	25.4	10	—	270	—	75	224.0

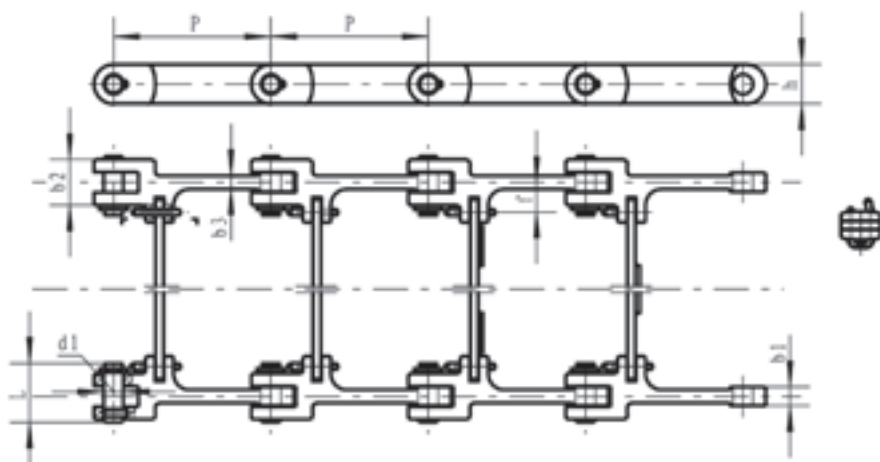


P	d1(mm)	h(mm)	b1(mm)	b2(mm)	b3(mm)	f(mm)	L(mm)
200	25	50	24	58	17	38	75

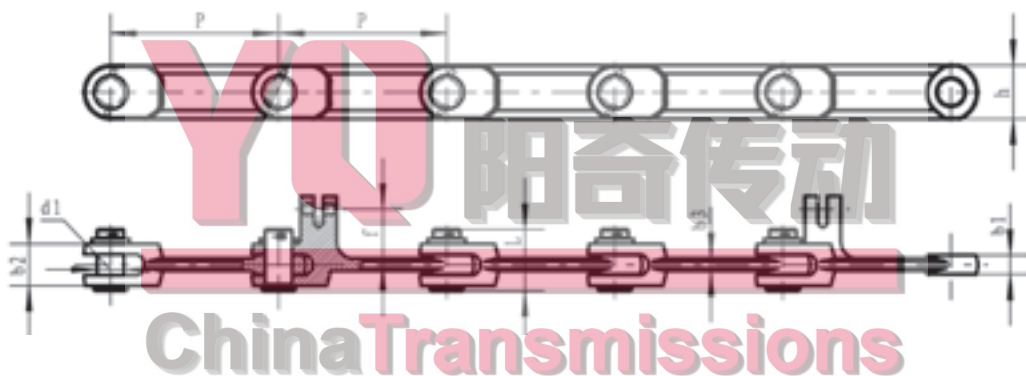


P	d1(mm)	h(mm)	b1(mm)	b2(mm)	b3(mm)	f(mm)	L(mm)
200	32	64	23	50	15	66	75

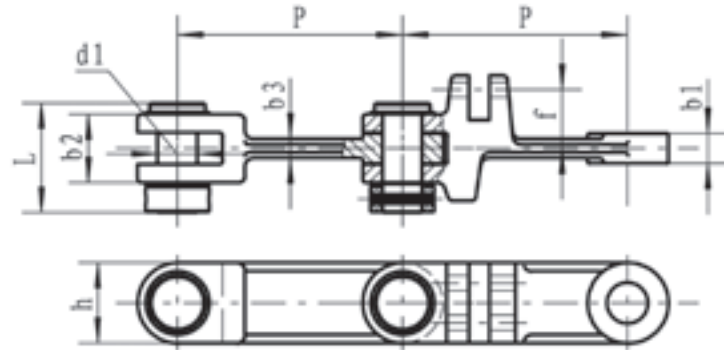

P	d1(mm)	b1(mm)	b2(mm)	b3(mm)	f(mm)	L(mm)
142	25	19	43	12.2	35	69

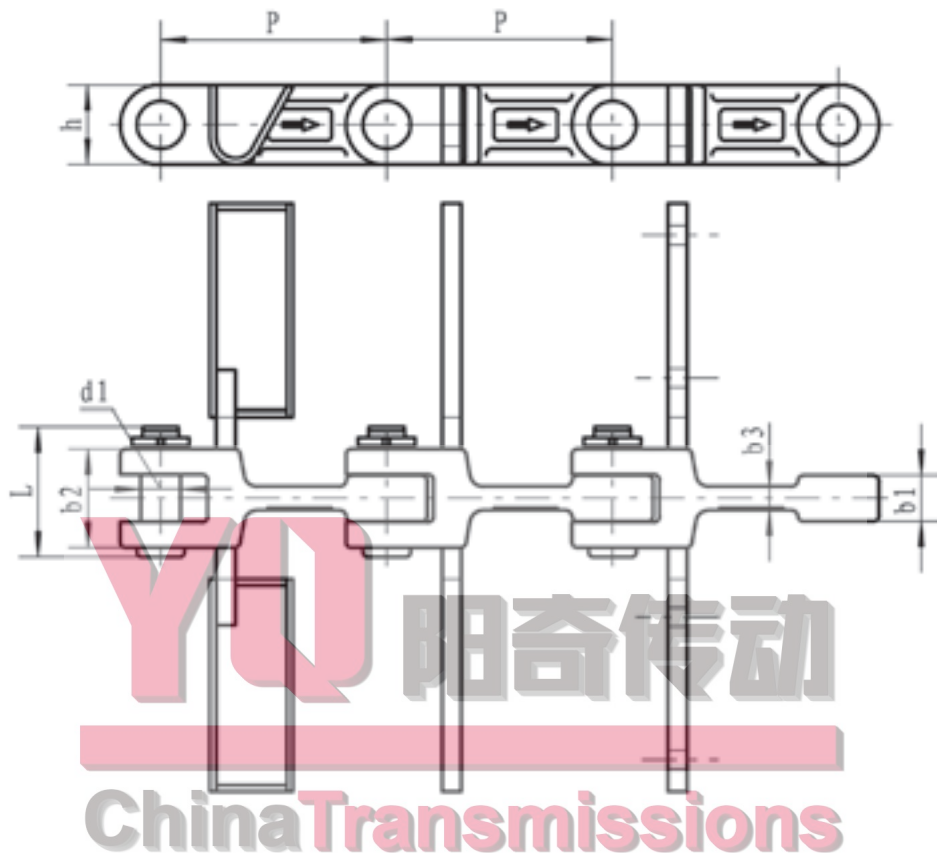

P	d1(mm)	b1(mm)	b2(mm)	b3(mm)	L(mm)
142	25	29	62	15	82

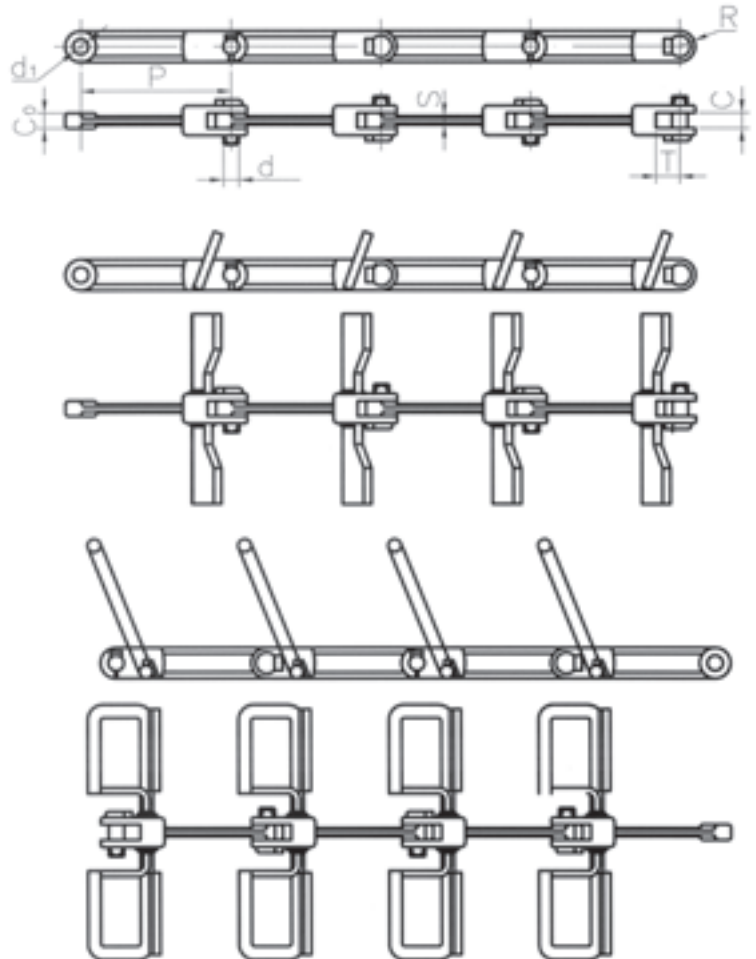

链号 Chain No.	抗拉强度 Tensile strength Q (KN)	节距 Pitch						销轴长度 Length of pin d (mm)	链杆参数 Dimensions of chain shaft					
		80 (mm)	100 (mm)	125 (mm)	160 (mm)	200 (mm)	250 (mm)		R (mm)	S (mm)	C (mm)	C0 (mm)	d1 (mm)	T (mm)
MCL56	56	#	#	#	#	#	#	9.92	10	6	12	11	10	12
MCL80	80	#	#	#	#	#	#	11.905	12	7	14	13	12	14
MCL112	112	#	#	#	#	#	#	14.905	15	8	16.5	15	15	17
MCL160	160	#	#	#	#	#	#	17.905	18	10	18.5	17	18	20
MCL224	224	#	#	#	#	#	#	20.89	21	12	22	20	21	23
MCL315	315	#	#	#	#	#	#	24.89	25	14	26	24	25	27
MCL450	450	#	#	#	#	#	#	29.88	30	16	30	28	30	32
MCL630	630	#	#	#	#	#	#	35.88	36	20	32	30	36	40
MCL900	900	#	#	#	#	#	#	43.87	45	24	40	38	44	48