


3BKH

BKH for "4L/5L" or "A/B" Belts(P.8~P.10)


Cast Iron Sheaves

YQ 阳奇传动


TYPE 2

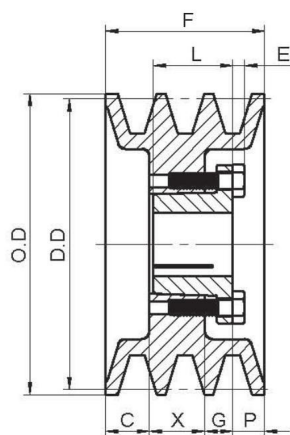

TYPE 3

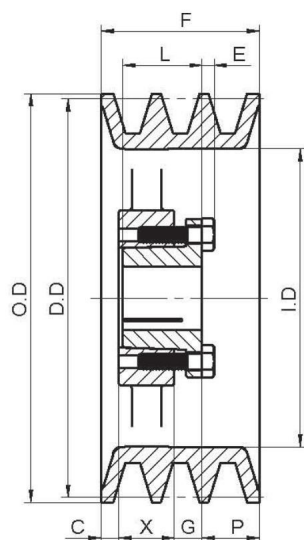

"H" Bushings



Three Groove Sheaves for "4L" or "A" Belts and "5L" or "B" Belts



Table No.1

Stock Sizes—with split Taper Bushings

Part No.	Type	DIAMETERS				DIMENSIONS							Wt .Lbs less Bush.
		Outside	Datum "A"	Datum "B"	Inside	F	L	P	C	X	G	E	
3BK45H	2	4.25	3.50	3.90	2 5/8	2 1/2	1 1/4	9/16	11/16	7/8	3/8	3/16	3.64
3BK47H	2	4.45	3.70	4.10	2 17/26	2 1/2	1 1/4	9/16	11/16	7/8	3/8	3/16	4.30
3BK50H	2	4.75	4.00	4.40	3	2 1/2	1 1/4	9/16	11/16	7/8	3/8	3/16	4.85
3BK52H	2	4.95	4.20	4.60	3 1/16	2 1/2	1 1/4	9/16	11/16	7/8	3/8	3/16	5.25
3BK55H	2	5.25	4.50	4.90	3 1/2	2 1/2	1 1/4	9/16	11/16	7/8	3/8	3/16	5.95
3BK57H	2	5.45	4.70	5.10	3 11/16	2 1/2	1 1/4	9/16	11/16	7/8	3/8	3/16	6.39
3BK60H	3	5.75	5.00	5.40	4	2 1/2	1 1/4	9/16	11/16	7/8	3/8	3/16	6.39
3BK62H	3	5.95	5.20	5.60	4 3/16	2 1/2	1 1/4	9/16	11/16	7/8	3/8	3/16	6.17
3BK65H	3	6.25	5.50	5.90	4 1/2	2 1/2	1 1/4	31/32	9/32	7/8	3/8	3/16	6.83
3BK67H	3	6.45	5.70	6.10	4 11/16	2 1/2	1 1/4	31/32	9/32	7/8	3/8	3/16	7.50
3BK70H	3	6.75	6.00	6.40	5	2 1/2	1 1/4	31/32	9/32	7/8	3/8	3/16	8.27
3BK80H	3	7.75	7.00	7.40	6	2 1/2	1 1/4	29/32	11/32	7/8	3/8	3/16	9.04
3BK90H	3	8.75	8.00	8.40	7	2 1/2	1 1/4	29/32	11/32	7/8	3/8	3/16	10.58
3BK100H	3	9.75	9.00	9.40	8	2 1/2	1 1/4	29/32	11/32	7/8	3/8	3/16	12.13
3BK110H	3	10.75	10.00	10.40	9	2 1/2	1 1/4	29/32	11/32	7/8	3/8	3/16	14.66
3BK120H	3	11.75	11.00	11.40	10	2 1/2	1 1/4	29/32	11/32	7/8	3/8	3/16	16.31
3BK130H	3	12.75	12.00	12.40	11	2 1/2	1 1/4	27/32	13/32	7/8	3/8	3/16	17.53
3BK140H	3	13.75	13.00	13.40	12	2 1/2	1 1/4	27/32	13/32	7/8	3/8	3/16	20.00
3BK160H	3	15.75	15.00	15.40	14	2 1/2	1 1/4	27/32	13/32	7/8	3/8	3/16	28.44
3BK190H	3	18.75	18.00	18.40	17	2 1/2	1 1/4	27/32	13/32	7/8	3/8	3/16	35.00

YQ 阳奇传动
ChinaTransmissions

Standard Keyseats


Table No.1

Bore Range	Keyseat
1/2" — 9/16"	1/8" × 1/16"
5/8 — 7/8	3/16 × 3/32
15/16 — 1 1/4	1/4 × 1/8
1 5/16 — 1 3/8	5/16 × 5/32
1 7/16 — 1 3/4	3/8 × 3/16
1 13/16 — 2 1/4	1/2 × 1/4
2 5/16 — 2 11/16	5/8 × 5/16


1 3/8 Bore Bushings also available with 3/8"x3/16" Keyseat.

Part No.	Dimension									Bore Range	Wt .Lbs.
	M	L	G	X	E	T	U	D	H		
P1	2 3/16"	1 15/16"	5/8"	1 5/16"	1/4"	1 17/32"	13/32"	1 15/16"	3"	1/2"-1 3/4"	1 1/4
P2	3 3/16"	2 15/16"	5/8"	2 5/16"	1/4"	2 17/32"	13/32"	1 15/16"	3	3/4-1 3/4	1 1/2
Q1	2 25/32	2 1/2	3/4	1 3/4	9/32	1 31/32	17/32	2 7/8	4 1/8	3/4-2 11/16	3 1/2


TYPE 2




TYPE 3




TYPE 5




TYPE 10

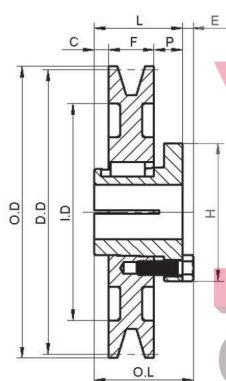

TYPE 11

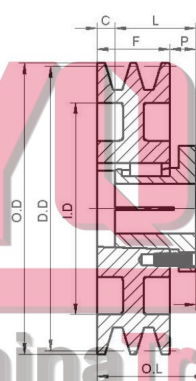

TYPE 13

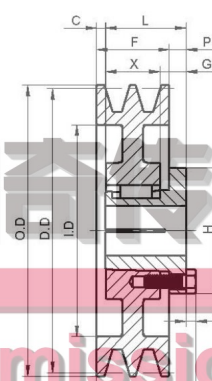

TYPE 16

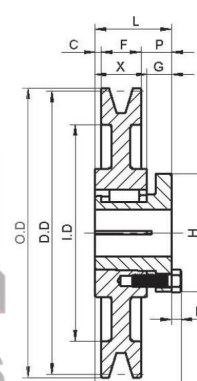


Table No.1

Specifications—Stock "TA" Sheaves

Part No.	Bushing	Type	DIAMETERS			1 GROOVE,F = 3/4"								Wt. Less Bush.
			Datum "A"	Outside	Inside	Dimensions								
						O.L.	L	P	C	H	G	X	E	
1TA30	P1	2	3.0"	3.25	—	2 3/16	1 15/16	1 3/16	0	3	5/8	1 5/16	1/4	1.34
1TA32	P1	2	3.2	3.45	—	2 3/16	1 15/16	1 3/16	0	3	5/8	1 5/16	1/4	1.63
1TA34	P1	2	3.4	3.65	—	2 3/16	1 15/16	1 3/16	0	3	5/8	1 5/16	1/4	1.83
1TA36	P1	2	3.6	3.85	—	2 3/16	1 15/16	1 3/16	0	3	5/8	1 5/16	1/4	2.01
1TA38	P1	2	3.8	4.05	—	2 3/16	1 15/16	1 3/16	0	3	5/8	1 5/16	1/4	2.23
1TA40	P1	2	4.0	4.25	—	2 3/16	1 15/16	1 3/16	0	3	5/8	1 5/16	1/4	2.43
1TA42	P1	10-Sol	4.2	4.45	—	2 3/16	1 15/16	5/8	9/16	3	—	—	1/4	1.83
1TA44	P1	10-Sol	4.4	4.65	—	2 3/16	1 15/16	5/8	9/16	3	—	—	1/4	2.09
1TA46	P1	10-Sol	4.6	4.85	—	2 3/16	1 15/16	5/8	9/16	3	—	—	1/4	2.31
1TA48	P1	10-Sol	4.8	5.05	—	2 3/16	1 15/16	5/8	9/16	3	—	—	1/4	2.60
1TA50	P1	10-Sol	5.0	5.25	—	2 3/16	1 15/16	5/8	9/16	3	—	—	1/4	2.89
1TA52	P1	10-Sol	5.2	5.45	—	2 3/16	1 15/16	5/8	9/16	3	—	—	1/4	3.17
1TA54	P1	10-Sol	5.4	5.65	—	2 3/16	1 15/16	5/8	9/16	3	—	—	1/4	3.48
1TA56	P1	10-Sol	5.6	5.85	—	2 3/16	1 15/16	5/8	9/16	3	—	—	1/4	3.81
1TA58	P1	10-Sol	5.8	6.05	—	2 3/16	1 15/16	5/8	9/16	3	—	—	1/4	4.14
1TA60	P1	10-Web	6.0	6.25	4 18/25	2 3/16	1 15/16	5/8	9/16	3	—	—	1/4	3.57
1TA62	P1	10-Web	6.2	6.45	4 15/16	2 3/16	1 15/16	5/8	9/16	3	—	—	1/4	3.81
1TA64	P1	10-Web	6.4	6.65	5 3/16	2 3/16	1 15/16	5/8	9/16	3	—	—	1/4	4.03
1TA70	P1	16-Arm	7.0	7.25	5 13/16	2 3/16	1 15/16	29/32	9/32	3	5/8	1 5/16	1/4	4.76
1TA82	P1	16-Arm	8.2	8.45	6 15/16	2 3/16	1 15/16	29/32	9/32	3	5/8	1 5/16	1/4	5.64
1TA90	P1	16-Arm	9.0	9.25	7 13/16	2 3/16	1 15/16	29/32	9/32	3	5/8	1 5/16	1/4	6.02
1TA106	P1	16-Arm	10.6	10.85	9 3/8	2 3/16	1 15/16	29/32	9/32	3	5/8	1 5/16	1/4	7.56
1TA120	Q1	16-Arm	12.0	12.25	10 13/16	2 25/32	2 1/2	1 1/4	1/2	4 1/8	3/4	1 3/4	9/32	11.99
1TA150	Q1	16-Arm	15.0	15.25	13 13/16	2 25/32	2 1/2	1 1/4	1/2	4 1/8	3/4	1 3/4	9/32	14.55
1TA180	Q1	16-Arm	18.0	18.25	16 13/16	2 25/32	2 1/2	1 1/4	1/2	4 1/8	3/4	1 3/4	9/32	18.30
1TA195	Q1	16-Arm	19.5	19.75	18 1/4	2 25/32	2 1/2	1 1/4	1/2	4 1/8	3/4	1 3/4	9/32	20.28
1TA245	Q1	16-Arm	24.5	24.75	23 1/4	2 25/32	2 1/2	1 1/4	1/2	4 1/8	3/4	1 3/4	9/32	28.66

Table No.2

Part No.	Bushing	Type	DIAMETERS			2 GROOVES, F = 1 3/8"									Wt. Less Bush.
			Datum "A"	Outside	Inside	Dimensions									
						O.L.	L	P	C	H	G	X	E		
2TA30	P1	2	3.0"	3.25	—	2 13/16	1 15/16	1 3/16	5/8	3	5/8	1 15/16	1/4	1.85	
2TA32	P1	2	3.2	3.45	—	2 13/16	1 15/16	1 3/16	5/8	3	5/8	1 15/16	1/4	2.31	
2TA34	P1	2	3.4	3.65	—	2 13/16	1 15/16	1 3/16	5/8	3	5/8	1 15/16	1/4	2.62	
2TA36	P1	5	3.6	3.85	—	2 1/4	1 15/16	5/8	1/16	3	—	1 3/8	1/4	2.07	
2TA38	P1	5	3.8	4.05	—	2 1/4	1 15/16	5/8	1/16	3	—	1 3/8	1/4	2.45	
2TA40	P1	5	4.0	4.25	—	2 1/4	1 15/16	5/8	1/16	3	—	1 3/8	1/4	2.91	
2TA42	P1	5	4.2	4.45	—	2 1/4	1 15/16	5/8	1/16	3	—	1 3/8	1/4	3.31	
2TA44	P1	5	4.4	4.65	—	2 1/4	1 15/16	5/8	1/16	3	—	1 3/8	1/4	3.77	
2TA46	P1	5	4.6	4.85	—	2 1/4	1 15/16	5/8	1/16	3	—	1 3/8	1/4	4.23	
2TA48	P1	5	4.8	5.05	—	2 1/4	1 15/16	5/8	1/16	3	—	1 3/8	1/4	4.65	
2TA50	P1	5-Web	5.0	5.25	3 4/5	2 1/4	1 15/16	5/8	1/16	3	—	—	1/4	4.78	
2TA52	P1	5-Web	5.2	5.45	3 19/20	2 1/4	1 15/16	5/8	1/16	3	—	—	1/4	5.11	
2TA54	P1	5-Web	5.4	5.65	4 3/20	2 1/4	1 15/16	5/8	1/16	3	—	—	1/4	5.18	
2TA56	P1	5-Web	5.6	5.85	4 7/20	2 1/4	1 15/16	5/8	1/16	3	—	—	1/4	5.53	
2TA58	P1	5-Web	5.8	6.05	4 11/20	2 1/4	1 15/16	5/8	1/16	3	—	—	1/4	5.82	
2TA60	P1	11-Web	6.0	6.25	4 3/4	2 1/4	1 15/16	5/8	1/16	3	—	—	1/4	6.15	
2TA62	P1	11-Web	6.2	6.45	4 15/16	2 1/4	1 15/16	5/8	1/16	3	—	—	1/4	6.48	
2TA64	P1	11-Web	6.4	6.65	5 3/16	2 1/4	1 15/16	5/8	1/16	3	—	—	1/4	6.75	
2TA70	Q1	16-Web	7.0	7.25	5 13/16	2 25/32	2 1/2	15/16	3/16	4 1/8	3/4	1 3/4	9/32	9.33	
2TA82	Q1	16-Arm	8.2	8.45	6 15/16	2 25/32	2 1/2	15/16	3/16	4 1/8	3/4	1 3/4	9/32	11.79	
2TA90	Q1	16-Arm	9.0	9.25	7 13/16	2 25/32	2 1/2	15/16	3/16	4 1/8	3/4	1 3/4	9/32	12.19	
2TA106	Q1	16-Arm	10.6	10.85	9 3/8	2 25/32	2 1/2	15/16	3/16	4 1/8	3/4	1 3/4	9/32	14.88	
2TA120	Q1	16-Arm	12.0	12.25	10 13/16	2 25/32	2 1/2	15/16	3/16	4 1/8	3/4	1 3/4	9/32	16.01	
2TA150	Q1	16-Arm	15.0	15.25	13 13/16	2 25/32	2 1/2	15/16	3/16	4 1/8	3/4	1 3/4	9/32	20.50	
2TA180	Q1	16-Arm	18.0	18.25	16 13/16	2 25/32	2 1/2	15/16	3/16	4 1/8	3/4	1 3/4	9/32	25.79	
2TA195	Q1	16-Arm	19.5	19.75	18 1/4	2 25/32	2 1/2	15/16	3/16	4 1/8	3/4	1 3/4	9/32	30.20	
2TA245	Q1	16-Arm	24.5	24.75	23 1/4	2 25/32	2 1/2	15/16	3/16	4 1/8	3/4	1 3/4	9/32	46.30	

Table No.3

Specifications—Stock "TA" Sheaves

Part No.	Bushing	Type	DIAMETERS			3 GROOVES,F =2"									Wt. Less Bush.
			Datum "A"	Outside	Inside	Dimensions									
						O.L.	L	P	C	H	G	X	E		
3TA30	P1	3	3.0"	3.25"	—	3 7/16	1 15/16	1 3/16	1 1/4	3	5/8	2 9/16	1/4	2.43	
3TA32	P1	3	3.2	3.45	—	3 7/16	1 15/16	1 3/16	1 1/4	3	5/8	2 9/16	1/4	2.93	
3TA34	P1	3	3.4	3.65	—	3 7/16	1 15/16	1 3/16	1 1/4	3	5/8	2 9/16	1/4	3.48	
3TA36	P1	5	3.6	3.85	2 3/8	2 7/8	1 15/16	5/8	11/16	3	—	1 3/8	1/4	2.76	
3TA38	P1	5	3.8	4.05	2 9/16	2 7/8	1 15/16	5/8	11/16	3	—	1 3/8	1/4	3.17	
3TA40	P1	5	4.0	4.25	2 3/4	2 7/8	1 15/16	5/8	11/16	3	—	1 3/8	1/4	3.68	
3TA42	P1	13-Sol	4.2	4.45	3 1/16	2 5/16	1 15/16	0	1/8	3	5/8	1 3/8	1/4	4.08	
3TA44	P1	13-Sol	4.4	4.65	3 3/16	2 5/16	1 15/16	0	1/8	3	5/8	1 3/8	1/4	4.59	
3TA46	P1	13-Sol	4.6	4.85	3 3/8	2 5/16	1 15/16	0	1/8	3	5/8	1 3/8	1/4	5.14	
3TA48	P1	13-Sol	4.8	5.05	3 9/16	2 5/16	1 15/16	0	1/8	3	5/8	1 3/8	1/4	5.67	
3TA50	P1	13-Web	5.0	5.25	3 3/4	2 5/16	1 15/16	0	1/8	3	5/8	1 3/8	1/4	5.89	
3TA52	P1	13-Web	5.2	5.45	3 15/16	2 5/16	1 15/16	0	1/8	3	5/8	1 3/8	1/4	6.19	
3TA54	P1	13-Web	5.4	5.65	4 3/16	2 5/16	1 15/16	0	1/8	3	5/8	1 3/8	1/4	6.24	
3TA56	P1	13-Web	5.6	5.85	4 3/8	2 5/16	1 15/16	0	1/8	3	5/8	1 3/8	1/4	6.66	
3TA58	P1	13-Web	5.8	6.05	4 9/16	2 5/16	1 15/16	0	1/8	3	5/8	1 3/8	1/4	7.17	
3TA60	P1	13-Web	6.0	6.25	4 3/4	2 5/16	1 15/16	0	1/8	3	5/8	1 3/8	1/4	7.43	
3TA62	P1	13-Web	6.2	6.45	4 15/16	2 5/16	1 15/16	0	1/8	3	5/8	1 3/8	1/4	7.94	
3TA64	P1	13-Web	6.4	6.65	5 3/16	2 5/16	1 15/16	0	1/8	3	5/8	1 3/8	1/4	8.18	
3TA70	Q1	13-Web	7.0	7.25	5 13/16	2 29/32	2 1/2	5/8	1/8	4 1/8	3/4	1 3/4	9/32	10.74	
3TA82	Q1	13-Arm	8.2	8.45	6 15/16	2 29/32	2 1/2	5/8	1/8	4 1/8	3/4	1 3/4	9/32	13.85	
3TA90	Q1	13-Arm	9.0	9.25	7 13/16	2 29/32	2 1/2	5/8	1/8	4 1/8	3/4	1 3/4	9/32	14.40	
3TA106	Q1	13-Arm	10.6	10.85	9 3/8	2 29/32	2 1/2	5/8	1/8	4 1/8	3/4	1 3/4	9/32	17.86	
3TA120	Q1	13-Arm	12.0	12.25	10 13/16	2 29/32	2 1/2	5/8	1/8	4 1/8	3/4	1 3/4	9/32	20.28	
3TA150	Q1	13-Arm	15.0	15.25	13 13/16	2 29/32	2 1/2	5/8	1/8	4 1/8	3/4	1 3/4	9/32	25.35	
3TA180	Q1	13-Arm	18.0	18.25	16 13/16	2 29/32	2 1/2	5/8	1/8	4 1/8	3/4	1 3/4	9/32	31.97	
3TA195	Q1	13-Arm	19.5	19.75	18 1/4	2 29/32	2 1/2	5/8	1/8	4 1/8	3/4	1 3/4	9/32	37.48	
3TA245	Q1	13-Arm	24.5	24.75	23 1/4	2 29/32	2 1/2	5/8	1/8	4 1/8	3/4	1 3/4	9/32	55.12	

Table No.4

Part No.	Bushing	Type	DIAMETERS			4 GROOVES,F = 2 5/8"									Wt. Less Bush.
			Datum "A"	Outside	Inside	Dimensions									
						O.L.	L	P	C	H	G	X	E		
4TA30	P2	3	3.0"	3.25	2	4 1/16	2 15/16	1 3/16	7/8	3	5/8	2 5/16	1/4	2.76	
4TA32	P2	3	3.2	3.45	2	4 1/16	2 15/16	1 3/16	7/8	3	5/8	2 5/16	1/4	3.51	
4TA34	P2	3	3.4	3.65	2 3/16	4 1/16	2 15/16	1 3/16	7/8	3	5/8	2 5/16	1/4	3.99	
4TA36	P1	5	3.6	3.85	2 3/8	3 1/2	1 15/16	5/8	1 5/16	3	—	1 5/16	1/4	3.40	
4TA38	P1	5	3.8	4.05	2 9/16	3 1/2	1 15/16	5/8	1 5/16	3	—	1 5/16	1/4	3.97	
4TA40	P1	5	4.0	4.25	2 3/4	3 1/2	1 15/16	5/8	1 5/16	3	—	1 5/16	1/4	4.37	
4TA42	P1	13-Sol	4.2	4.45	3 1/16	2 7/8	1 15/16	0	11/16	3	5/8	1 5/16	1/4	4.70	
4TA44	P1	13-Sol	4.4	4.65	3 3/16	2 7/8	1 15/16	0	11/16	3	5/8	1 5/16	1/4	5.40	
4TA46	P1	13-Sol	4.6	4.85	3 3/8	2 7/8	1 15/16	0	11/16	3	5/8	1 5/16	1/4	5.93	
4TA48	P1	13-Sol	4.8	5.05	3 9/16	2 7/8	1 15/16	0	11/16	3	5/8	1 5/16	1/4	6.55	
4TA50	P1	13-Web	5.0	5.25	3 3/4	2 7/8	1 15/16	0	11/16	3	5/8	1 5/16	1/4	6.83	
4TA52	P1	13-Web	5.2	5.45	3 15/16	2 7/8	1 15/16	0	11/16	3	5/8	1 5/16	1/4	7.19	
4TA54	P1	13-Web	5.4	5.65	4 3/16	2 7/8	1 15/16	0	11/16	3	5/8	1 5/16	1/4	7.36	
4TA56	P1	13-Web	5.6	5.85	4 3/8	2 7/8	1 15/16	0	11/16	3	5/8	1 5/16	1/4	7.76	
4TA58	P1	13-Web	5.8	6.05	4 9/16	2 7/8	1 15/16	0	11/16	3	5/8	1 5/16	1/4	8.40	
4TA60	P1	13-Web	6.0	6.25	4 3/4	2 7/8	1 15/16	0	11/16	3	5/8	1 5/16	1/4	8.80	
4TA62	P1	13-Web	6.2	6.45	4 15/16	2 7/8	1 15/16	0	11/16	3	5/8	1 5/16	1/4	9.26	
4TA64	P1	13-Web	6.4	6.65	5 3/16	2 7/8	1 15/16	0	11/16	3	5/8	1 5/16	1/4	9.52	
4TA70	Q1	13-Web	7.0	7.25	5 13/16	3 7/32	2 1/2	5/16	7/16	4 1/8	3/4	1 3/4	9/32	12.74	
4TA82	Q1	13-Arm	8.2	8.45	6 15/16	3 7/32	2 1/2	5/16	7/16	4 1/8	3/4	1 3/4	9/32	16.12	
4TA90	Q1	13-Arm	9.0	9.25	7 13/16	3 7/32	2 1/2	5/16	7/16	4 1/8	3/4	1 3/4	9/32	17.28	
4TA106	Q1	13-Arm	10.6	10.85	9 3/8	3 7/32	2 1/2	5/16	7/16	4 1/8	3/4	1 3/4	9/32	20.81	
4TA120	Q1	13-Arm	12.0	12.25	10 13/16	3 7/32	2 1/2	5/16	7/16	4 1/8	3/4	1 3/4	9/32	23.52	
4TA150	Q1	13-Arm	15.0	15.25	13 13/16	3 7/32	2 1/2	5/16	7/16	4 1/8	3/4	1 3/4	9/32	29.76	
4TA180	Q1	13-Arm	18.0	18.25	16 13/16	3 7/32	2 1/2	5/16	7/16	4 1/8	3/4	1 3/4	9/32	39.68	
4TA195	Q1	13-Arm	19.5	19.75	18 1/4	3 7/32	2 1/2	5/16	7/16	4 1/8	3/4	1 3/4	9/32	44.75	
4TA245	Q1	13-Arm	24.5	24.75	23 1/4	3 7/32	2 1/2	5/16	7/16	4 1/8	3/4	1 3/4	9/32	67.24	

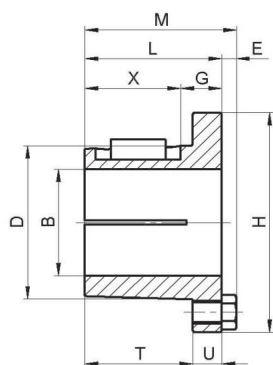


Table No.1

Bore Range	Keyseat
1/2" — 9/16"	1/8" x 1/16"
5/8 — 7/8	3/16 x 3/32
15/16 — 1 1/4	1/4 x 1/8
1 5/16 — 1 3/8	5/16 x 5/32
1 7/16 — 1 3/4	3/8 x 3/16
1 13/16 — 2 1/4	1/2 x 1/4
2 5/16 — 2 11/16	5/8 x 5/16


1 3/8" Bore also available with 3/8"x3/16" Keyseat.

Table No.2


Bushing Dimension

Part No.	Dimensions									Bore Range	Wt. Lbs.
	M	L	G	X	E	T	U	D	H		
P1	2 3/16"	1 15/16"	5/8"	1 5/16"	1/4"	1 17/32"	13/32"	1 15/16"	3"	1/2"-1 3/4"	1 1/4
P2	3 3/16	2 15/16	5/8	2 5/16	1/4	2 17/32	13/32	1 15/16	3	3/4-1 3/4	1 1/2
Q1	2 25/32	2 1/2	3/4	1 3/4	9/32	1 31/32	17/32	2 7/8	4 1/8	3/4-2 11/16	3 1/2
Q2	3 25/32	3 1/2	3/4	2 3/4	9/32	2 31/32	17/32	2 7/8	4 1/8	1-2 5/8	4 1/2


TYPE 2




TYPE 3




TYPE 5




TYPE 10

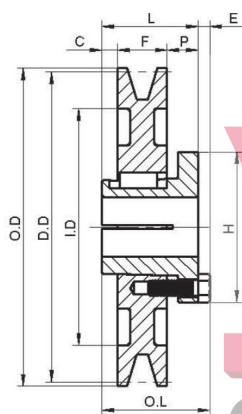


TYPE 13

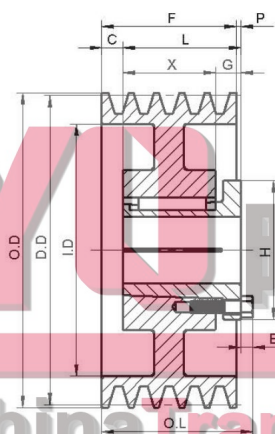

TYPE 15

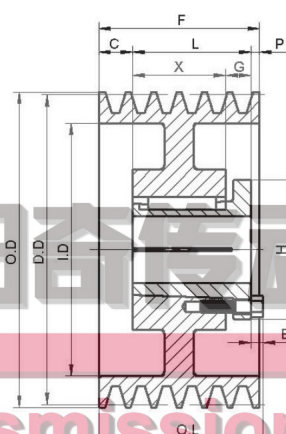

TYPE 16

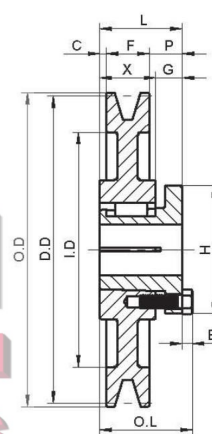

YU 阳奇传动
China transmissions

Table No.3

Specifications—Stock "TB" Sheaves

Part No.	Bushing	Type	DIAMETERS				1 GROOVE, F = 1"; 2 GROOVES, F=1 3/4"										Wt. Less Bush.
			Datum "A"	Datum "B"	Outside	Inside	Dimensions										
							O.L.	L	P	C	H	G	X	E			
1TB34	P1	2	3.0	3.4	3.75	—	2 5/16	1 15/16	1 1/16	1/8	3	5/8	1 7/16	1/4	2.0		
1TB36	P1	2	3.2	3.6	3.95	—	2 5/16	1 15/16	1 1/16	1/8	3	5/8	1 7/16	1/4	2.2		
1TB38	P1	2	3.4	3.8	4.15	—	2 5/16	1 15/16	1 1/16	1/8	3	5/8	1 7/16	1/4	2.5		
1TB40	P1	10-Sol.	3.6	4	4.35	—	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	2.2		
1TB42	P1	10-Sol.	3.8	4.2	4.55	—	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	2.5		
1TB44	P1	10-Sol.	4.0	4.4	4.75	—	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	2.9		
1TB46	P1	10-Sol.	4.2	4.6	4.95	—	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	3.2		
1TB48	P1	10-Sol.	4.4	4.8	5.15	—	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	3.5		
1TB50	P1	10-Sol.	4.6	5.0	5.35	—	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	4.0		
1TB52	P1	10-Sol.	4.8	5.2	5.55	—	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	4.4		
1TB54	P1	10-Sol.	5.0	5.4	5.75	—	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	4.8		
1TB56	P1	10-Sol.	5.2	5.6	5.95	—	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	5.0		
1TB58	P1	10-Sol.	5.4	5.8	6.15	—	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	5.6		
1TB60	P1	10-Web	5.6	6	6.35	4 1/2	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	5.1		
1TB62	P1	10-Web	5.8	6.2	6.55	4 11/16	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	5.3		
1TB64	P1	10-Web	6.0	6.4	6.75	4 7/8	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	5.7		
1TB66	P1	10-Web	6.2	6.6	6.95	5 1/16	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	6.0		
1TB68	P1	10-Web	6.4	6.8	7.15	5 5/16	2 3/16	1 15/16	5/8	5/16	3	—	—	1/4	6.3		
1TB70	P1	16-Arm	6.6	7	7.35	5 1/2	2 3/16	1 15/16	25/32	5/32	3	5/8	1 5/16	1/4	7.3		
1TB74	P1	16-Arm	7.0	7.4	7.75	5 15/16	2 3/16	1 15/16	25/32	5/32	3	5/8	1 5/16	1/4	7.6		
1TB80	P1	16-Arm	7.6	8.0	8.35	6 1/2	2 3/16	1 15/16	25/32	5/32	3	5/8	1 5/16	1/4	7.9		
1TB86	P1	16-Arm	8.2	8.6	8.95	7 1/16	2 3/16	1 15/16	25/32	5/32	3	5/8	1 5/16	1/4	8.9		
1TB90	P1	16-Arm	8.6	9	9.35	7 1/2	2 3/16	1 15/16	25/32	5/32	3	5/8	1 5/16	1/4	9.5		
1TB94	P1	16-Arm	9.0	9.4	9.75	7 15/16	2 3/16	1 15/16	25/32	5/32	3	5/8	1 5/16	1/4	9.4		
1TB110	P1	16-Arm	10.6	11	11.35	9 7/16	2 3/16	1 15/16	25/32	5/32	3	5/8	1 5/16	1/4	11.7		
1TB124	Q1	16-Arm	12.0	12.4	12.75	10 15/16	2 25/32	2 1/2	1 1/8	3/8	4 1/8	3/4	1 3/4	9/32	14.1		
1TB136	Q1	16-Arm	13.2	13.6	13.95	12 1/16	2 25/32	2 1/2	1 1/8	3/8	4 1/8	3/4	1 3/4	9/32	15.0		
1TB154	Q1	16-Arm	15.0	15.4	15.75	13 15/16	2 25/32	2 1/2	1 1/8	3/8	4 1/8	3/4	1 3/4	9/32	17.0		
1TB160	Q1	16-Arm	15.6	16.0	16.35	14 1/2	2 25/32	2 1/2	1 1/8	3/8	4 1/8	3/4	1 3/4	9/32	18.3		
1TB184	Q1	16-Arm	18.0	18.4	18.75	16 15/16	2 25/32	2 1/2	1 1/8	3/8	4 1/8	3/4	1 3/4	9/32	20.9		
1TB200	Q1	16-Arm	19.5	20	20.35	18 1/2	2 25/32	2 1/2	1 1/8	3/8	4 1/8	3/4	1 3/4	9/32	22.7		
1TB250	Q1	16-Arm	24.5	25	25.35	23 1/2	2 25/32	2 1/2	1 1/8	3/8	4 1/8	3/4	1 3/4	9/32	29.0		
1TB300	Q1	16-Arm	29.5	30.0	30.35	28 1/2	2 25/32	2 1/2	1 1/8	3/8	4 1/8	3/4	1 3/4	9/32	38.6		
1TB380	Q1	16-Arm	37.5	38.0	38.35	36 1/2	2 25/32	2 1/2	1 1/8	3/8	4 1/8	3/4	1 3/4	9/32	79.0		
2TB34	P1	2	3.0	3.4	3.75	—	3 1/16	1 15/16	1 1/16	7/8	3	5/8	2 3/16	1/4	2.9		
2TB36	P1	2	3.2	3.6	3.95	—	3 1/16	1 15/16	1 1/16	7/8	3	5/8	2 3/16	1/4	3.4		
2TB38	P1	5	3.4	3.8	4.15	2 5/16	2 5/8	1 15/16	5/8	7/16	3	—	1 5/16	1/4	3.0		
2TB40	P1	5	3.6	4	4.35	2 1/2	2 5/8	1 15/16	5/8	7/16	3	—	1 5/16	1/4	3.5		
2TB42	P1	5	3.8	4.2	4.55	2 11/16	2 5/8	1 15/16	5/8	7/16	3	—	1 5/16	1/4	4.0		
2TB44	P1	13-Sol.	4.0	4.4	4.75	2 7/8	2 3/16	1 15/16	3/16	0	3	5/8	1 5/16	1/4	4.2		
2TB46	P1	13-Sol.	4.2	4.6	4.95	3 1/16	2 3/16	1 15/16	3/16	0	3	5/8	1 5/16	1/4	4.6		
2TB48	P1	13-Sol.	4.4	4.8	5.15	3 5/16	2 3/16	1 15/16	3/16	0	3	5/8	1 5/16	1/4	5.4		
2TB50	P1	13-Sol.	4.6	5.0	5.35	3 1/2	2 3/16	1 15/16	3/16	0	3	5/8	1 5/16	1/4	6.0		
2TB52	P1	13-Sol.	4.8	5.2	5.55	3 11/16	2 3/16	1 15/16	3/16	0	3	5/8	1 5/16	1/4	6.6		
2TB54	P1	13-Sol.	5.0	5.4	5.75	3 7/8	2 3/16	1 15/16	3/16	0	3	5/8	1 5/16	1/4	7.2		
2TB56	P1	13-Sol.	5.2	5.6	5.95	4 1/16	2 3/16	1 15/16	3/16	0	3	5/8	1 5/16	1/4	7.7		
2TB58	P1	13-Sol.	5.4	5.8	6.15	4 5/16	2 3/16	1 15/16	3/16	0	3	5/8	1 5/16	1/4	8.4		
2TB60	P1	13-Sol.	5.6	6	6.35	4 1/2	2 3/16	1 15/16	3/16	0	3	5/8	1 5/16	1/4	8.9		
2TB62	P1	13-Web	5.8	6.2	6.55	4 11/16	2 3/16	1 15/16	3/16	0	3	5/8	1 5/16	1/4	7.8		
2TB64	P1	13-Web	6.0	6.4	6.75	4 7/8	2 3/16	1 15/16	3/16	0	3	5/8	1 5/16	1/4	8.3		
2TB66	P1	13-Web	6.2	6.6	6.95	5 1/16	2 3/16	1 15/16	3/16	0	3	5/8	1 5/16	1/4	8.6		
2TB68	P1	13-Web	6.4	6.8	7.15	5 5/16	2 3/16	1 15/16	3/16	0	3	5/8	1 5/16	1/4	8.8		
2TB70	Q1	13-Web	6.6	7	7.35	5 1/2	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	10.9		
2TB74	Q1	13-Web	7.0	7.4	7.75	5 15/16	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	12.0		
2TB80	Q1	13-Web	7.6	8.0	8.35	6 1/2	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	13.6		
2TB86	Q1	13-Web	8.2	8.6	8.95	7 1/16	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	14.8		
2TB90	Q1	13-Arm	8.6	9	9.35	7 1/2	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	12.9		
2TB94	Q1	13-Arm	9.0	9.4	9.75	7 15/16	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	14.3		
2TB110	Q1	13-Arm	10.6	11	11.35	9 7/16	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	16.8		
2TB124	Q1	13-Arm	12.0	12.4	12.75	10 15/16	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	18.4		
2TB136	Q1	13-Arm	13.2	13.6	13.95	12 1/16	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	20.2		
2TB154	Q1	13-Arm	15.0	15.4	15.75	13 15/16	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	21.5		
2TB160	Q1	13-Arm	15.6	16.0	16.35	14 1/2	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	24.4		
2TB184	Q1	13-Arm	18.0	18.4	18.75	16 15/16	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	28.5		
2TB200	Q1	13-Arm	19.5	20	20.35	18 1/2	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	30.9		
2TB250	Q1	13-Arm	24.5	25	25.35	23 1/2	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	38.6		
2TB300	Q1	13-Arm	29.5	30.0	30.35	28 1/2	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	94.8		
2TB380	Q1	13-Arm	37.5	38.0	38.35	36 1/2	2 25/32	2 1/2	3/4	0	4 1/8	3/4	1 3/4	9/32	161.0		

Table No.4

Specifications—Stock "TB" Sheaves

Part No.	Bushing	Type	DIAMETERS				3 GROOVE, F = 2 1/2" ; 4 GROOVES, F=3 1/4"										Wt. Less Bush.
			Datum "A"	Datum "B"	Outside	Inside	Dimensions										
							O.L.	L	P	C	H	G	X	E			
3TB34	P2	3	3.0	3.4	3.75	2	3 13/16	2 15/16	1 1/16	5/8	3"	5/8	2 5/16	1/4	3.7		
3TB36	P2	3	3.2	3.6	3.95	2 1/16	3 13/16	2 15/16	1 1/16	5/8	3	5/8	2 5/16	1/4	4.4		
3TB38	P1	5	3.4	3.8	4.15	2 5/16	3 3/8	1 15/16	5/8	1 3/16	3	—	1 5/16	1/4	4.1		
3TB40	P1	5	3.6	4.0	4.35	2 1/2	3 3/8	1 15/16	5/8	1 3/16	3	—	1 5/16	1/4	4.5		
3TB42	P1	5	3.8	4.2	4.55	2 11/16	3 3/8	1 15/16	5/8	1 3/16	3	—	1 5/16	1/4	5.2		
3TB44	P1	13-Sol.	4.0	4.4	4.75	2 7/8	2 3/4	1 15/16	0	9/16	3	5/8	1 5/16	1/4	5.4		
3TB46	P1	13-Sol.	4.2	4.6	4.95	3 1/16	2 3/4	1 15/16	0	9/16	3	5/8	1 5/16	1/4	6.2		
3TB48	P1	13-Sol.	4.4	4.8	5.15	3 5/16	2 3/4	1 15/16	0	9/16	3	5/8	1 5/16	1/4	6.8		
3TB50	P1	13-Sol.	4.6	5.0	5.35	3 1/2	2 3/4	1 15/16	0	9/16	3	5/8	1 5/16	1/4	7.5		
3TB52	P1	13-Sol.	4.8	5.2	5.55	3 11/16	2 3/4	1 15/16	0	9/16	3	5/8	1 5/16	1/4	7.7		
3TB54	P1	13-Sol.	5.0	5.4	5.75	3 7/8	2 3/4	1 15/16	0	9/16	3	5/8	1 5/16	1/4	8.8		
3TB56	P1	13-Web	5.2	5.6	5.95	4 1/16	2 3/4	1 15/16	0	9/16	3	5/8	1 5/16	1/4	8.9		
3TB58	P1	13-Web	5.4	5.8	6.15	4 5/16	2 3/4	1 15/16	0	9/16	3	5/8	1 5/16	1/4	9.2		
3TB60	P1	13-Web	5.6	6.0	6.35	4 1/2	2 3/4	1 15/16	0	9/16	3	5/8	1 5/16	1/4	9.9		
3TB62	P1	13-Web	5.8	6.2	6.55	4 11/16	2 3/4	1 15/16	0	9/16	3	5/8	1 5/16	1/4	10.4		
3TB64	P1	13-Web	6.0	6.4	6.75	4 7/8	2 3/4	1 15/16	0	9/16	3	5/8	1 5/16	1/4	10.9		
3TB66	P1	13-Web	6.2	6.6	6.95	5 1/16	2 3/4	1 15/16	0	9/16	3	5/8	1 5/16	1/4	11.6		
3TB68	P1	13-Web	6.4	6.8	7.15	5 5/16	2 3/4	1 15/16	0	9/16	3	5/8	1 5/16	1/4	12.0		
3TB70	Q1	13-Web	6.6	7.0	7.35	5 1/2	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	15.2		
3TB74	Q1	13-Web	7.0	7.4	7.75	5 15/16	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	15.0		
3TB80	Q1	13-Web	7.6	8.0	8.35	6 1/2	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	17.9		
3TB86	Q1	13-Web	8.2	8.6	8.95	7 1/16	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	20.1		
3TB90	Q1	13-Arm	8.6	9.0	9.35	7 1/2	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	18.6		
3TB94	Q1	13-Arm	9.0	9.4	9.75	7 15/16	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	19.3		
3TB110	Q1	13-Arm	10.6	11.0	11.35	9 7/16	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	22.7		
3TB124	Q1	13-Arm	12.0	12.4	12.75	10 15/16	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	27.7		
3TB136	Q1	13-Arm	13.2	13.6	13.95	12 1/16	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	29.0		
3TB154	Q1	13-Arm	15.0	15.4	15.75	13 15/16	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	31.9		
3TB160	Q1	13-Arm	15.6	16.0	16.35	14 1/2	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	35.5		
3TB184	Q1	13-Arm	18.0	18.4	18.75	16 15/16	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	40.5		
3TB200	Q1	13-Arm	19.5	20.0	20.35	18 1/2	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	50.0		
3TB250	Q1	13-Arm	24.5	25.0	25.35	23 1/2	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	61.7		
3TB300	Q1	13-Arm	29.5	30.0	30.35	28 1/2	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	79.0		
3TB380	Q1	13-Arm	37.5	38.0	38.35	36 1/2	3 5/32	2 1/2	3/8	3/8	4 1/8	3/4	1 3/4	9/32	110.0		

4TB34	P2	3	3.0"	3.4"	3.75"	2"	4 9/16"	2 15/16"	1 1/16"	1 3/8"	3"	5/8"	2 5/16"	1/4"	4.52	
4TB36	P2	3	3.2	3.6	3.95	2 1/16	4 9/16	2 15/16	1 1/16	1 3/8	3	5/8	2 5/16	1/4	5.30	
4TB38	P1	5	3.4	3.8	4.15	2 5/16	4 1/8	1 15/16	5/8	1 15/16	3	—	1 5/16	1/4	5.07	
4TB40	P1	5	3.6	4.0	4.35	2 1/2	4 1/8	1 15/16	5/8	1 15/16	3	—	1 5/16	1/4	5.73	
4TB42	P1	5	3.8	4.2	4.55	2 11/16	4 1/8	1 15/16	5/8	1 15/16	3	—	1 5/16	1/4	6.37	
4TB44	P1	13-Sol.	4.0	4.4	4.75	2 7/8	3 1/2	1 15/16	0	1 5/16	3	5/8	1 5/16	1/4	6.83	
4TB46	P1	13-Sol.	4.2	4.6	4.95	3 1/16	3 1/2	1 15/16	0	1 5/16	3	5/8	1 5/16	1/4	7.63	
4TB48	P1	13-Sol.	4.4	4.8	5.15	3 5/16	3 1/2	1 15/16	0	1 5/16	3	5/8	1 5/16	1/4	8.14	
4TB50	P1	13-Sol.	4.6	5.0	5.35	3 1/2	3 1/2	1 15/16	0	1 5/16	3	5/8	1 5/16	1/4	8.82	
4TB52	P1	13-Sol.	4.8	5.2	5.55	3 11/16	3 1/2	1 15/16	0	1 5/16	3	5/8	1 5/16	1/4	9.59	
4TB54	P1	13-Web	5.0	5.4	5.75	3 7/8	3 1/2	1 15/16	0	1 5/16	3	5/8	1 5/16	1/4	9.70	
4TB56	P1	13-Web	5.2	5.6	5.95	4 1/16	3 1/2	1 15/16	0	1 5/16	3	5/8	1 5/16	1/4	10.30	
4TB58	P1	13-Web	5.4	5.8	6.15	4 5/16	3 1/2	1 15/16	0	1 5/16	3	5/8	1 5/16	1/4	10.80	
4TB60	P1	13-Web	5.6	6.0	6.35	4 1/2	3 1/2	1 15/16	0	1 5/16	3	5/8	1 5/16	1/4	11.68	
4TB62	P1	13-Web	5.8	6.2	6.55	4 11/16	3 1/2	1 15/16	0	1 5/16	3	5/8	1 5/16	1/4	12.35	
4TB64	P1	13-Web	6.0	6.4	6.75	4 7/8	3 1/2	1 15/16	0	1 5/16	3	5/8	1 5/16	1/4	12.90	
4TB66	P1	13-Web	6.2	6.6	6.95	5 1/16	3 1/2	1 15/16	0	1 5/16	3	5/8	1 5/16	1/4	12.40	
4TB68	P1	13-Web	6.4	6.8	7.15	5 5/16	3 1/2	1 15/16	0	1 5/16	3	5/8	1 5/16	1/4	13.50	
4TB70	Q1	13-Web	6.6	7.0	7.35	5 1/2	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	17.33	
4TB74	Q1	13-Web	7.0	7.4	7.75	5 15/16	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	16.98	
4TB80	Q1	13-Web	7.6	8.0	8.35	6 1/2	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	20.17	
4TB86	Q1	13-Web	8.2	8.6	8.95	7 1/16	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	22.82	
4TB90	Q1	13-Arm	8.6	9.0	9.35	7 1/2	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	21.67	
4TB94	Q1	13-Arm	9.0	9.4	9.75	7 15/16	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	26.01	
4TB110	Q1	13-Arm	10.6	11.0	11.35	9 7/16	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	27.34	
4TB124	Q1	13-Arm	12.0	12.4	12.75	10 15/16	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	29.52	
4TB136	Q1	13-Arm	13.2	13.6	13.95	12 1/16	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	34.68	
4TB154	Q1	13-Arm	15.0	15.4	15.75	13 15/16	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	39.70	
4TB160	Q1	13-Arm	15.6	16.0	16.35	14 1/2	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	45.20	
4TB184	Q1	13-Arm	18.0	18.4	18.75	16 15/16	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	46.85	
4TB200	Q1	13-Arm	19.5	20.0	20.35	18 1/2	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	52.69	
4TB250	Q1	13-Arm	24.5	25.0	25.35	23 1/2	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	75.22	
4TB300	Q1	13-Arm	29.5	30.0	30.35	28 1/2	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	96.00	
4TB380	Q1	13-Arm	37.5	38.0	38.35	36 1/2	3 17/32	2 1/2	0	3/4	4 1/8	3/4	1 3/4	9/32	125.0	

Table No.5


Specifications—Stock "TB" Sheaves

Part No.	Bushing	Type	DIAMETERS				5 GROOVE, F = 4" 6 GROOVES,F=4 3/4"										Wt. Less Bush.
			Datum "A"	Datum "B"	Outside	Inside	Dimensions										
							O.L.	L	P	C	H	G	X	E			
5TB34	P2	3	3.0	3.4	3.75	2	5 5/16	2 15/16	1 1/16	2 1/8	3	5/8	2 5/16	1/4	5.3		
5TB36	P2	3	3.2	3.6	3.95	2 1/16	5 5/16	2 15/16	1 1/16	2 1/8	3	5/8	2 5/16	1/4	6.2		
5TB38	P2	5	3.4	3.8	4.15	2 5/16	4 7/8	2 15/16	5/8	1 11/16	3	—	2 5/16	1/4	6.3		
5TB40	P2	5	3.6	4.0	4.35	2 1/2	4 7/8	2 15/16	5/8	1 11/16	3	—	2 5/16	1/4	7.1		
5TB42	P2	5	3.8	4.2	4.55	2 11/16	4 7/8	2 15/16	5/8	1 11/16	3	—	2 5/16	1/4	8.0		
5TB44	P2	13-Sol.	4.0	4.4	4.75	3 1/16	4 1/4	2 15/16	0	1 1/16	3	5/8	2 5/16	1/4	8.6		
5TB46	P2	13-Sol.	4.2	4.6	4.95	3 1/16	4 1/4	2 15/16	0	1 1/16	3	5/8	2 5/16	1/4	10.0		
5TB48	P2	13-Sol.	4.4	4.8	5.15	3 5/16	4 1/4	2 15/16	0	1 1/16	3	5/8	2 5/16	1/4	10.8		
5TB50	P2	13-Sol.	4.6	5.0	5.35	3 1/2	4 1/4	2 15/16	0	1 1/16	3	5/8	2 5/16	1/4	11.8		
5TB52	P2	13-Web	4.8	5.2	5.55	3 11/16	4 1/4	2 15/16	0	1 1/16	3	5/8	2 5/16	1/4	12.5		
5TB54	Q1	13-Sol.	5.0	5.4	5.75	4 3/16	4 9/32	2 1/2	0	1 1/2	4 1/8	3/4	1 3/4	9/32	9.8		
5TB56	Q1	13-Sol.	5.2	5.6	5.95	4 3/16	4 9/32	2 1/2	0	1 1/2	4 1/8	3/4	1 3/4	9/32	11.6		
5TB58	Q1	13-Sol.	5.4	5.8	6.15	4 5/16	4 9/32	2 1/2	0	1 1/2	4 1/8	3/4	1 3/4	9/32	12.7		
5TB60	Q1	13-Sol.	5.6	6.0	6.35	4 1/2	4 9/32	2 1/2	0	1 1/2	4 1/8	3/4	1 3/4	9/32	13.8		
5TB62	Q1	13-Sol.	5.8	6.2	6.55	4 11/16	4 9/32	2 1/2	0	1 1/2	4 1/8	3/4	1 3/4	9/32	14.8		
5TB64	Q1	13-Sol.	6.0	6.4	6.75	4 7/8	4 9/32	2 1/2	0	1 1/2	4 1/8	3/4	1 3/4	9/32	16.0		
5TB66	Q1	13-Web	6.2	6.6	6.95	5 1/16	4 9/32	2 1/2	0	1 1/2	4 1/8	3/4	1 3/4	9/32	16.7		
5TB68	Q1	13-Web	6.4	6.8	7.15	5 5/16	4 9/32	2 1/2	0	1 1/2	4 1/8	3/4	1 3/4	9/32	17.3		
5TB70	Q2	13-Web	6.6	7.0	7.35	5 1/2	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	22.8		
5TB74	Q2	13-Web	7.0	7.4	7.75	5 15/16	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	22.9		
5TB80	Q2	13-Web	7.6	8.0	8.35	6 1/2	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	27.0		
5TB86	Q2	13-Web	8.2	8.6	8.95	7 1/16	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	30.4		
5TB90	Q2	13-Arm	8.6	9.0	9.35	7 7/20	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	31.5		
5TB94	Q2	13-Arm	9.0	9.4	9.75	7 3/4	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	32.5		
5TB110	Q2	13-Arm	10.6	11.0	11.35	9 7/20	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	39.0		
5TB124	Q2	13-Arm	12.0	12.4	12.75	10 3/4	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	44.1		
5TB136	Q2	13-Arm	13.2	13.6	13.95	11 19/20	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	48.5		
5TB154	Q2	13-Arm	15.0	15.4	15.75	13 3/4	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	56.4		
5TB160	Q2	13-Arm	15.6	16.0	16.35	14 7/20	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	59.1		
5TB184	Q2	13-Arm	18.0	18.4	18.75	16 3/4	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	72.8		
5TB200	Q2	13-Arm	19.5	20.0	20.35	18 7/20	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	81.6		
5TB250	Q2	13-Arm	24.5	25.0	25.35	23 7/20	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	114.6		
5TB300	Q2	13-Arm	29.5	30.0	30.35	28 7/20	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	150.8		
5TB380	Q2	13-Arm	37.5	38.0	38.35	36 7/20	4 13/32	3 1/2	1/8	5/8	4 1/8	3/4	2 3/4	9/32	231.5		

6TB34	P2	3	3.0	3.4	3.75	2	6 1/16	2 15/16	1 1/16	2 7/8	3	5/8	2 5/16	1/4	6.1		
6TB36	P2	3	3.2	3.6	3.95	2 1/16	6 1/16	2 15/16	1 1/16	2 7/8	3	5/8	2 5/16	1/4	7.1		
6TB38	P2	5	3.4	3.8	4.15	2 5/16	5 5/8	2 15/16	5/8	2 7/16	3	—	2 5/16	1/4	7.3		
6TB40	P2	5	3.6	4.0	4.35	2 1/2	5 5/8	2 15/16	5/8	2 7/16	3	—	2 5/16	1/4	8.2		
6TB42	P2	5	3.8	4.2	4.55	2 11/16	5 5/8	2 15/16	5/8	2 7/16	3	—	2 5/16	1/4	9.2		
6TB44	P2	13-Sol.	4.0	4.4	4.75	3 1/16	5	2 15/16	0	1 13/16	3	5/8	2 5/16	1/4	9.5		
6TB46	P2	13-Sol.	4.2	4.6	4.95	3 1/16	5	2 15/16	0	1 13/16	3	5/8	2 5/16	1/4	11.2		
6TB48	P2	13-Sol.	4.4	4.8	5.15	3 5/16	5	2 15/16	0	1 13/16	3	5/8	2 5/16	1/4	12.0		
6TB50	P2	13-Sol.	4.6	5.0	5.35	3 1/2	5	2 15/16	0	1 13/16	3	5/8	2 5/16	1/4	13.4		
6TB52	P2	13-Web	4.8	5.2	5.55	3 11/16	5	2 15/16	0	1 13/16	3	5/8	2 5/16	1/4	14.1		
6TB54	Q1	13-Sol.	5.0	5.4	5.75	4 3/16	5 1/32	2 1/2	0	2 1/4	4 1/8	3/4	1 3/4	9/32	10.9		
6TB56	Q1	13-Sol.	5.2	5.6	5.95	4 3/16	5 1/32	2 1/2	0	2 1/4	4 1/8	3/4	1 3/4	9/32	13.8		
6TB58	Q1	13-Sol.	5.4	5.8	6.15	4 5/16	5 1/32	2 1/2	0	2 1/4	4 1/8	3/4	1 3/4	9/32	14.5		
6TB60	Q1	13-Sol.	5.6	6.0	6.35	4 1/2	5 1/32	2 1/2	0	2 1/4	4 1/8	3/4	1 3/4	9/32	15.7		
6TB62	Q1	13-Sol.	5.8	6.2	6.55	4 11/16	5 1/32	2 1/2	0	2 1/4	4 1/8	3/4	1 3/4	9/32	16.8		
6TB64	Q1	13-Sol.	6.0	6.4	6.75	4 7/8	5 1/32	2 1/2	0	2 1/4	4 1/8	3/4	1 3/4	9/32	18.0		
6TB66	Q1	13-Sol.	6.2	6.6	6.95	5 1/16	5 1/32	2 1/2	0	2 1/4	4 1/8	3/4	1 3/4	9/32	19.2		
6TB68	Q1	13-Web	6.4	6.8	7.15	5 5/16	5 1/32	2 1/2	0	2 1/4	4 1/8	3/4	1 3/4	9/32	19.6		
6TB70	Q2	15-Web	6.6	7.0	7.35	5 1/2	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	24.9		
6TB74	Q2	15-Web	7.0	7.4	7.75	5 15/16	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	25.8		
6TB80	Q2	15-Web	7.6	8.0	8.35	6 1/2	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	29.4		
6TB86	Q2	15-Web	8.2	8.6	8.95	7 1/16	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	33.2		
6TB90	Q2	15-Web	8.6	9.0	9.35	7 1/2	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	34.7		
6TB94	Q2	15-Arm	9.0	9.4	9.75	7 3/4	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	36.4		
6TB110	Q2	15-Arm	10.6	11.0	11.35	9 7/20	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	43.3		
6TB124	Q2	15-Arm	12.0	12.4	12.75	10 3/4	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	49.7		
6TB136	Q2	15-Arm	13.2	13.6	13.95	11 19/20	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	58.2		
6TB154	Q2	15-Arm	15.0	15.4	15.75	13 3/4	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	65.0		
6TB160	Q2	15-Arm	15.6	16.0	16.35	14 7/20	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	68.8		
6TB184	Q2	15-Arm	18.0	18.4	18.75	16 3/4	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	83.8		
6TB200	Q2	15-Arm	19.5	20.0	20.35	18 7/20	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	96.6		
6TB250	Q2	15-Arm	24.5	25.0	25.35	23 7/20	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	127.9		
6TB300	Q2	15-Arm	29.5	30.0	30.35	28 7/20	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	168.7		
6TB380	Q2	15-Arm	37.5	38.0	38.35	36 7/20	4 25/32	3 1/2	1/4	1	4 1/8	3/4	2 3/4	9/32	255.7		

For Use with All "C" Section Belts

◆ STATICALLY BALANCED

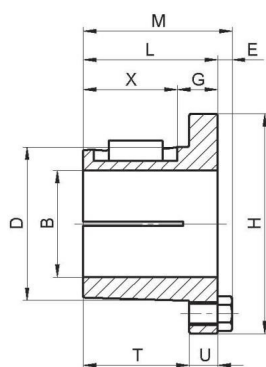

Standard Keyseats

Table No.1


Bore Range	Keyseat
3/4" — 7/8"	3/16" x 3/32"
15/16 — 1 1/4	1/4 x 1/8
1 5/16 — 1 3/8	5/16 x 5/32
1 7/16 — 1 3/4	3/8 x 3/16
1 13/16 — 2 1/4	1/2 x 1/4
2 5/16 — 2 11/16	5/8 x 5/16

1 3/8 Bore Bushings also available with 3/8"x3/16" Keyseat.

Table No.2

Bushing Dimensions

Part No.	Dimensions									Bore Range	Wt. Lbs.
	M	L	G	X	E	T	U	D	H		
Q1	2 25/32"	2 1/2"	3/4"	1 3/4"	9/32"	1 31/32"	17/32"	2 7/8"	4 1/8"	3/4" - 2 11/16"	3 1/2
Q2	3 25/32"	3 1/2"	3/4"	2 3/4"	9/32"	2 31/32"	17/32"	2 7/8"	4 1/8"	1" - 2 5/8"	4 1/2

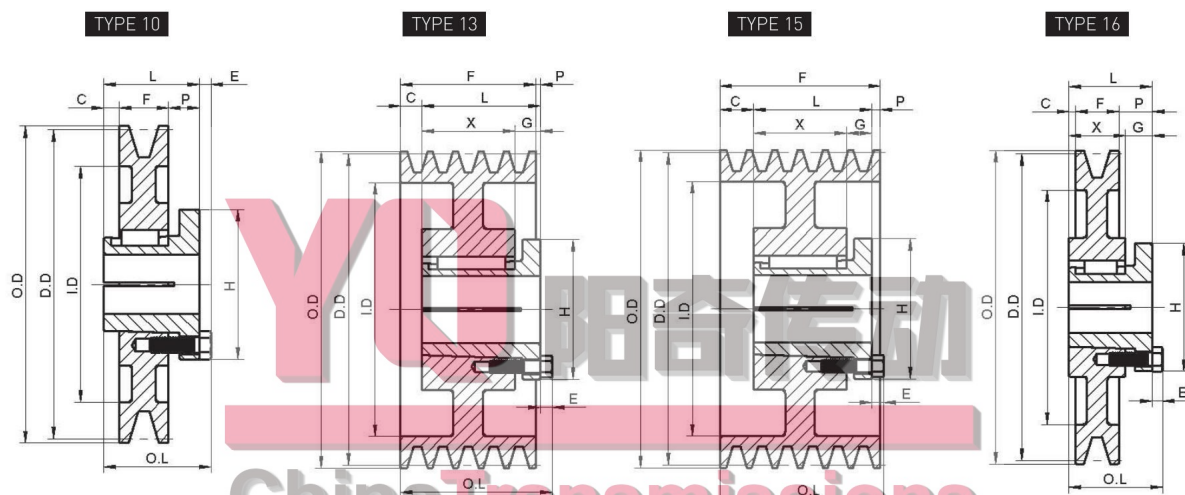

China Transmissions