



科技創新，精智  
Technological innovation, sophisticated creation

東莞市大迪自動化科技有限公司  
Dongguan Dadi Automation Technology Co., Ltd.  
地址：东莞市横沥镇三江工业区10号  
电话：0769-81108586



微倍  
發  
刷  
檢

在流水作業中，是否出現各種 **欠量** 或 **漏件**  
的 **品質** 問題而 **煩惱**？就找賽多利**動態檢重秤**！

一直致力於**動態檢重**、**自動稱重**等**自動化**關鍵技術的研發

# 公司內部環境 Internal environment

# 企業資質 Enterprise qualification



大迪工廠



# 案例展示 The case shows



# 企业简介

## COMPANY PROFILE

東莞市大迪自動化科技有限公司是一家以自動化重量檢測系統和自動物流秤重系統集成為核心，集研發、生產、銷售為一體的高新科技企業。主要產品包括自動檢重秤、重量分選機、動態物流秤及各類秤重、掃碼、打印貼標、量方的整線集成方案等。公司產品被廣泛應用於電子、制藥、食品、飲料、保健品、日化、輕工、農副產品、煙草、五金、水產、快遞物流的全行業的生產包裝流程中。

公司堅持以“科技創新，精智造，品質服務”為宗旨，在當前經濟結構調整、工業結構升級形勢下，致力於推動自動秤量產業升級。公司擁有先進的發展理念和一支專業水準高、創新能力強、服務意識好的團隊。在高速、高精度抗干擾技術領域多年潛心自主研發，不斷改革創新，追求卓越品質。以為各行業提供更穩定、可靠的秤重系統的解決方案為己任，從而奠定了自動秤重行業領導品牌的地

Dongguan DADI Automation Technology Co., Ltd. is a high-tech enterprise which integrates automatic weight detection system and automatic logistics weighing system as the core and integrates R&D, production and sales. The main products include automatic weighing scale, weight sorter, dynamic logistics scale and all kinds of weighing, sweeping code, printing label, volume measurement, etc. the company's products are widely used in electronic, pharmaceutical, food, beverage, health products, daily chemical, light industry, agricultural and sideline products, tobacco, hardware, aquatic products, express logistics in the entire industry production and packaging process.

The company adheres to the tenet of "scientific and technological innovation, meticulous and intelligent manufacturing, quality service", and is committed to promoting the upgrading of automatic weighing industry under the current situation of economic restructuring and industrial structure upgrading. The company has advanced development concept and a team with high professional level, strong innovation ability and good service consciousness. In the field of high-speed and high-precision anti-jamming technology, we have devoted ourselves to research and development for many years, constantly reform and innovation, and pursue excellent quality. It is our responsibility to provide more stable and reliable solutions for weighing systems in various industries, thus establishing the leading brand position of automatic weighing industry.

### 為什麼選擇使用大迪檢重秤 Why Choose to Use DADI Weighing Scale

大迪檢重秤不僅僅局限於秤重，它是生產流水線上一套必不可少的檢測設備，主要解決生產作業中遇到的缺件漏件等品質問題；只要是可以通過檢測重量來解決的問題，都可以優先採用大迪檢重秤；因為可靠穩定、高效精準，在很多場合可以為您帶來極大的方便，為客戶創造巨大的經濟效益。

DADI weighing scale is not only limited to weighing, it is an indispensable detection equipment in production line, mainly to solve the quality problems such as missing parts and missing parts encountered in production operations; as long as the problem can be solved by weight detection, DADI weighing scale can be preferred; because it is reliable, stable, efficient and accurate, it can bring you great convenience in many occasions and create huge economic benefits for customers.

### 適用行業 Apply To Industry



食品行業  
The Food Industry



啤酒飲料行業  
Beer And Beverage



日化輕工行業  
Daily Chemical Light



制藥行業  
The Pharmaceutical



模具五金行業  
Die Hardware Industry



塑料橡膠行業  
Plastic And Rubber



快遞物流行業  
Express Logistics



通訊行業  
Communications



家電行業  
Home Appliance Industry



海鮮水產行業  
Seafood Aquaculture



海產品加工行業  
Seafood Processing



禽肉制品行業  
Poultry products



中藥加工行業  
Traditional Chinese Medicine Processing



農化行業  
The Agrochemical



塗料行業  
The Paint Industry




汽車制造行業  
Automobile Manufacturing

### 市場主要產品 Major Products In The Market

自動檢重秤、重量分選機、動態物流秤、靜態皮帶秤、無動力滾筒秤、自動螺絲秤和自動稱重、掃碼、打印貼標、體積測量一體機、金屬檢測機等自動化設備！


Automatic weighing scales, weight sorters, dynamic logistics scales, static belt scales, powerless drum scales, automatic screw scales and automatic weighing, scanning, printing labeling, volume measuring machine, metal testing machine and other automated equipment!

01 在線檢重秤  
Check and weigh online

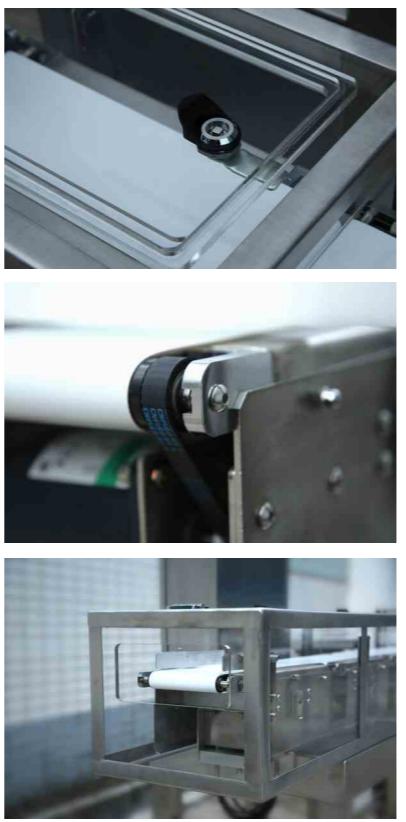

產品參數 Product parameters

產品型號 Product model	DCW3012L02	DCW3512L05	DCW4012L1
顯示分度 Resolution	0.02g	0.05g	0.1g
檢重範圍 Weight checking range	1-200g	1-500g	2-1000g
檢重精度 Weight checking accuracy	± 0.1-0.3g	± 0.15-0.5g	± 0.2-0.6g
秤重段尺寸 Size of weighing section	L 300mm*W 120mm	L:350mm*W 120mm	L 400mm*W 120mm
適檢產品尺寸 Suitable product size	L≤ 200mm W≤ 120mm	L≤ 230mm W≤ 120mm	L≤ 280mm W≤ 120mm
秤重控制系統 Weighing Control System	大迪在線秤重控制系統 V1.1.5 DADI On-line weighing control system V1.1.5		
皮帶速度 Belt speed	5-90/分鐘 5-90m/min		
產品數量 Number of items	20-50種 20-50 items		
檢重段數 Sorting section	標準2段，可選3段 Standard 2 sections, optional 3 sections		
剔除裝置 Eliminating device	氣吹式、推桿式、撥桿式、上下翻板可選 Air blowing, push rod, baffle, top and bottom turning plate are optional		
電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源：乾燥的0.5~0.8MPa (5~8bar) 溫度：使用溫度：0°C~40°C, 儲存溫度：-20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30、IP54、IP65可選 噪音：≤75db 機器重量：≈60kg 工作高度：750±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0-40 Storage temperature: -20-60. Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Noise: <75db Machine weight: 60kg Working Height: 750± 50mm (confirmed when ordering other heights)			
標準技術參數 Standard technical parameters			
材質 Material	秤重傳感器：鋁、不銹鋼可選 滾筒：鋁 結構：不銹鋼304 輸送皮帶：白色，食品級，聚氨酯熱塑性塑料 (TPU) Weighing Sensor: Aluminum and stainless steel optional Roller: Aluminum Structure: stainless steel 304 Conveyor Belt: White, Food Grade, Polyurethane Thermoplastic (TPU)		

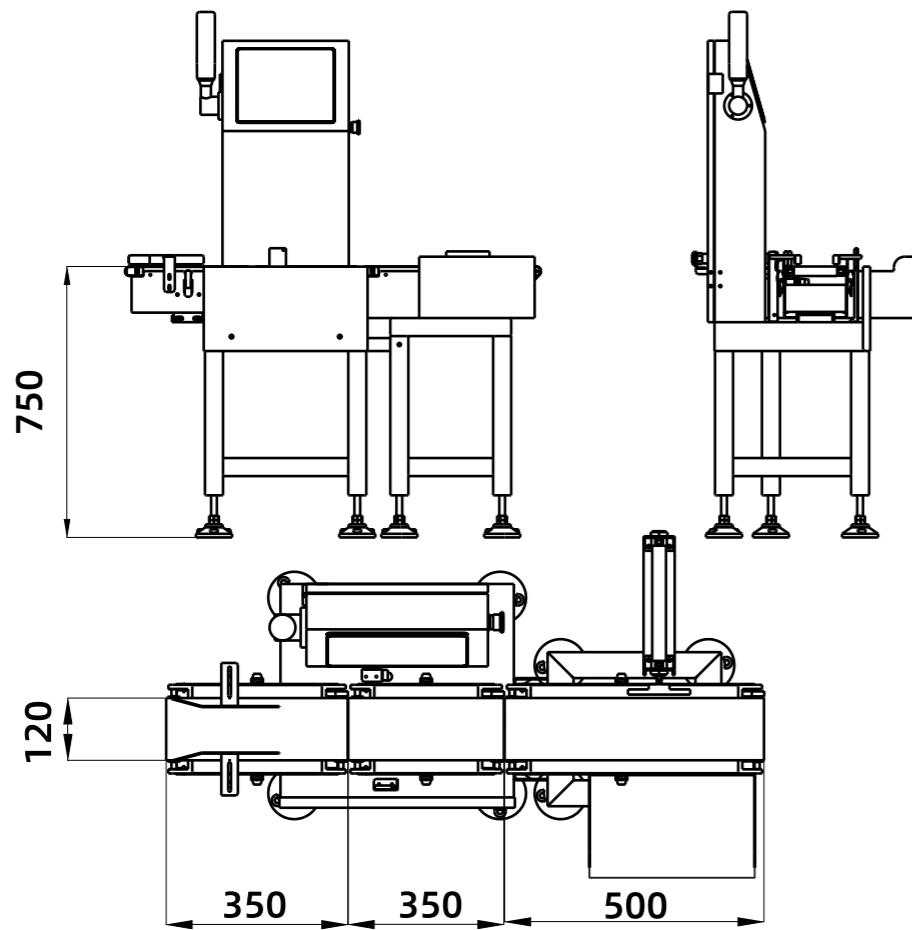


\*最高檢重速度和檢重精度，根據實際被檢測產品和安裝環境的不同而有所不同。

\*選型注意產品在皮帶線上的運動方向，產品透明或半透明物請與我司聯繫。

\* The maximum speed and precision of weight checking vary according to the actual products and installation environment.

\* Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

02 在線檢重秤  
Check and weigh online

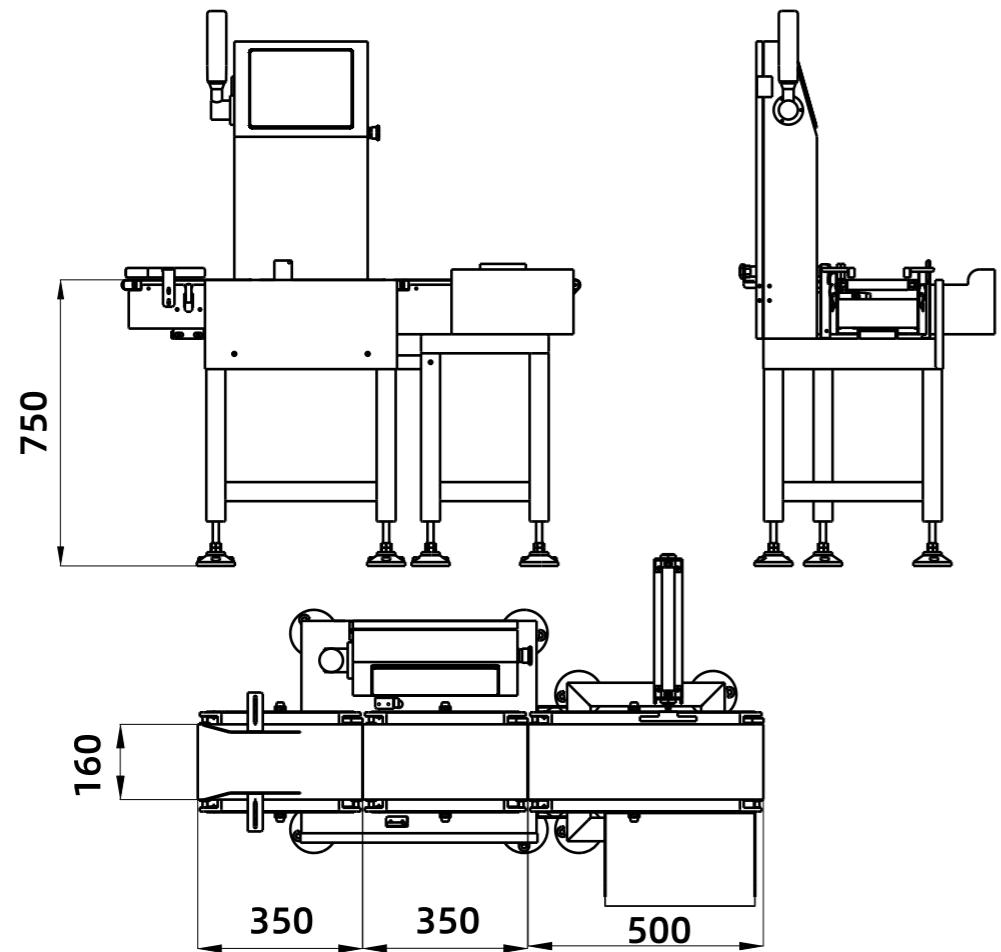

產品參數 Product parameters


產品型號 Product model	DCW3016L03	DCW3516L08	DCW4016L15
顯示分度 Resolution	0.02g	0.05g	0.1g
檢重範圍 Weight checking range	1-300g	1-800g	2-1500g
檢重精度 Weight checking accuracy	±0.15-0.3g	± 0.2-0.5g	± 0.2-0.6g
秤重段尺寸 Size of weighing section	L 300mm*W 160mm	L:350mm*W 160mm	L 400mm*W 160mm
適檢產品尺寸 Suitable product size	L≤ 200mm W≤ 160mm	L≤ 230mm W≤ 160mm	L≤ 280mm W≤ 160mm
秤重控制系統 Weighing Control System	大迪在線秤重控制系統 V1.1.5 DADI On-line weighing control system V1.1.5		
皮帶速度 Belt speed	5-90/分鐘 5-90m/min		
產品數量 Number of items	20-50種 20-50 items		
檢重段數 Sorting section	標準2段，可選3段 Standard 2 sections,optional 3 sections		
剔除裝置 Eliminating device	氣吹式、推桿式、撥桿式、上下翻板可選 Air blowing, push rod, baffle, top and bottom turning plate are optional		
	電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源：乾燥的0.5~0.8MPa (5-8bar) 溫度：使用溫度：0°C~40°C, 儲存溫度：-20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30、IP54、IP65可選 噪音：≤75db 機器重量：≈60kg 工作高度：750±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0~40°C Storage temperature: -20~60°C Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Noise: <75db Machine weight: 60kg Working Height: 750± 50mm (confirmed when ordering other heights)		
標準技術參數 Standard technical parameters			
材質 Material	秤重傳感器：鋁、不銹鋼可選 滾筒：鋁 結構：不銹鋼304 輸送皮帶：白色，食品級，聚氨酯熱塑性塑料 (TPU) Weighing Sensor: Aluminum and stainless steel optional Roller: Aluminum Structure: stainless steel 304 Conveyor Belt: White, Food Grade, Polyurethane Thermoplastic (TPU)		

\*最高檢重速度和檢重精度，根據實際被檢測產品和安裝環境的不同而有所不同。

\*選型注意產品在皮帶線上的運動方向，產品透明或半透明物請與我司聯繫。

\* The maximum speed and precision of weight checking vary according to the actual products and installation environment.

\* Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

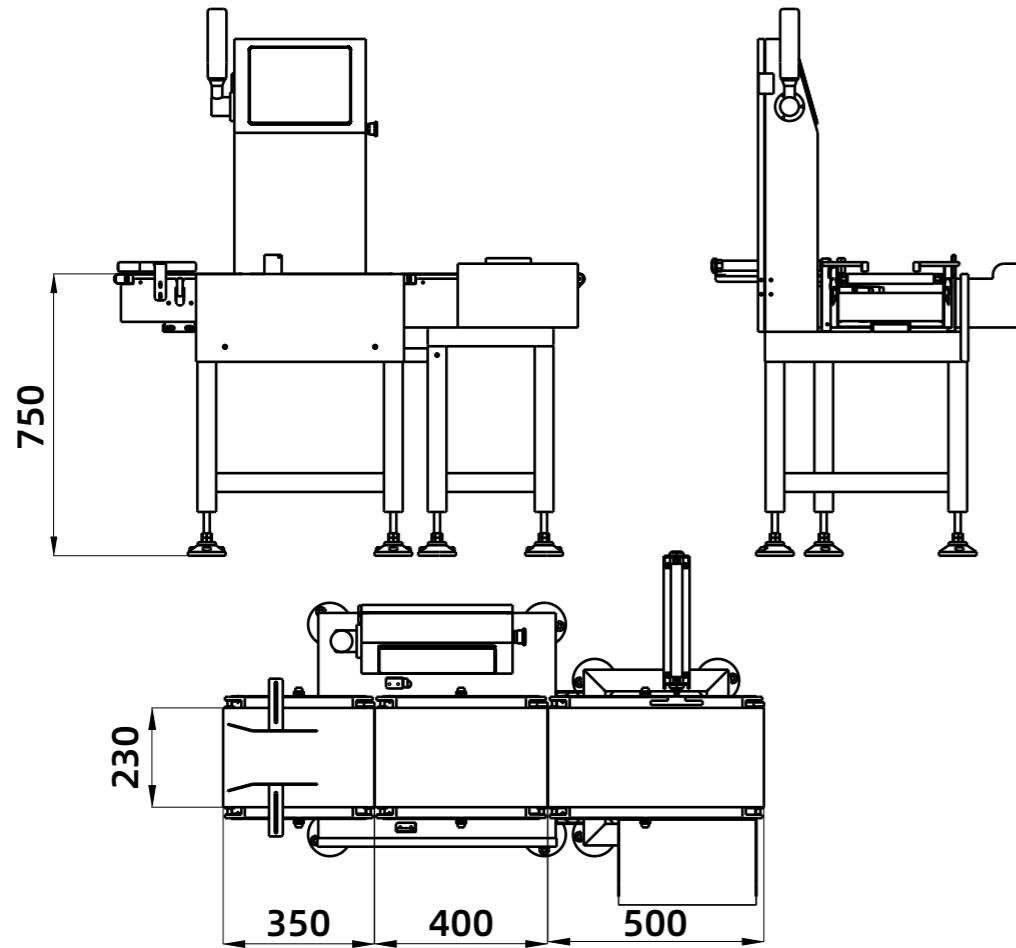

## 產品參數 Product parameters

產品型號 Product model	DCW3023L05	DCW3523L1	DCW4023L2
顯示分度 Resolution	0.02g	0.05g	0.1g
檢重範圍 Weight checking range	1- 500g	2- 1000g	2- 2000g
檢重精度 Weight checking accuracy	±0.2-0.5g	± 0.3- 0.8g	± 0.5-1g
秤重段尺寸 Size of weighing section	L 300mm*W 230mm	L:350mm*W 230mm	L 400mm*W 230mm
適檢產品尺寸 Suitable product size	L≤ 200mm; W≤ 230mm	L≤ 230mm; W≤ 230mm	L≤ 280mm; W≤ 230mm
秤重控制系統 Weighing Control System	大迪在線秤重控制系統 V1.1.5 DADI On-line weighing control system V1.1.5		
皮帶速度 Belt speed	5-90/分鐘 5-90m/min		
產品數量 Number of items	20-50種 20-50 items		
檢重段數 Sorting section	標準2段，可選3段 Standard 2 sections, optional 3 sections		
剔除裝置 Eliminating device	氣吹式、推桿式、撥桿式、上下翻板可選 Air blowing, push rod, baffle, top and bottom turning plate are optional		
標準技術參數 Standard technical parameters	電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源：乾燥的0.5~0.8MPa (5~8bar) 溫度：使用溫度：0°C~40°C, 儲存溫度：-20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30、IP54、IP65可選 噪聲：≤75db 機器重量：≈60kg 工作高度：750±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0~40°C Storage temperature: -20~60°C Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Noise: <75db Machine weight: 60kg Working Height: 750±50mm (confirmed when ordering other heights)		
材質 Material	秤重傳感器：鋁、不銹鋼可選 滾筒：鋁 結構：不銹鋼304 輸送皮帶：白色，食品級，聚氨酯熱塑性塑料 (TPU) Weighing Sensor: Aluminum and stainless steel optional Roller: Aluminum Structure: stainless steel 304 Conveyor Belt: White, Food Grade, Polyurethane Thermoplastic (TPU)		

\*最高檢重速度和檢重精度，根據實際被檢測產品和安裝環境的不同而有所不同。

\*選型注意產品在皮帶線上的運動方向，產品透明或半透明物請與我司聯繫。


\* The maximum speed and precision of weight checking vary according to the actual products and installation environment.

\* Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.



## 產品參數 Product parameters

產品型號 Product model	DCW3530L1	DCW4030L2	DCW4530L3
顯示分度 Resolution	0.1g	0.1g	0.1g
檢重範圍 Weight checking range	1-1000g	2-2000g	2-3000g
檢重精度 Weight checking accuracy	±0.5-0.8g	± 0.5-1g	± 0.8- 3g
秤重段尺寸 Size of weighing section	L 350mm*W 300mm	L:400mm*W 300mm	L 400mm*W 300mm
適檢產品尺寸 Suitable product size	L≤ 230mm; W≤ 300mm	L≤ 280mm; W≤ 300mm	L≤ 330mm; W≤ 300mm
秤重控制系統 Weighing Control System	大迪在線秤重控制系統 V1.1.5 DADI On-line weighing control system V1.1.5		
皮帶速度 Belt speed	5-90/分鐘 5-90m/min		
產品數量 Number of items	20-50種 20-50 items		
檢重段數 Sorting section	標準2段，可選3段 Standard 2 sections,optional 3 sections		
剔除裝置 Eliminating device	氣吹式、推桿式、撥桿式、上下翻板可選 Air blowing, push rod, baffle, top and bottom turning plate are optional		
	電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源：乾燥的0.5~0.8MPa (5~8bar) 溫度：使用溫度：0°C~40°C, 儲存溫度：-20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30、IP54、IP65可選 噪聲：≤75db 機器重量：≈60kg 工作高度：750±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0~40°C Storage temperature: -20~60°C. Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Noise: <75db Machine weight: 60kg Working Height: 750± 50mm (confirmed when ordering other heights)		
標準技術參數 Standardtechnical parameters			
材質 Material	秤重傳感器：鋁、不銹鋼可選 滾筒：鋁 結構：不銹鋼304 輸送皮帶：白色，食品級，聚氨酯熱塑性塑料 (TPU) Weighing Sensor: Aluminum and stainless steel optional Roller: Aluminum Structure: stainless steel 304 Conveyor Belt: White, Food Grade, Polyurethane Thermoplastic (TPU)		

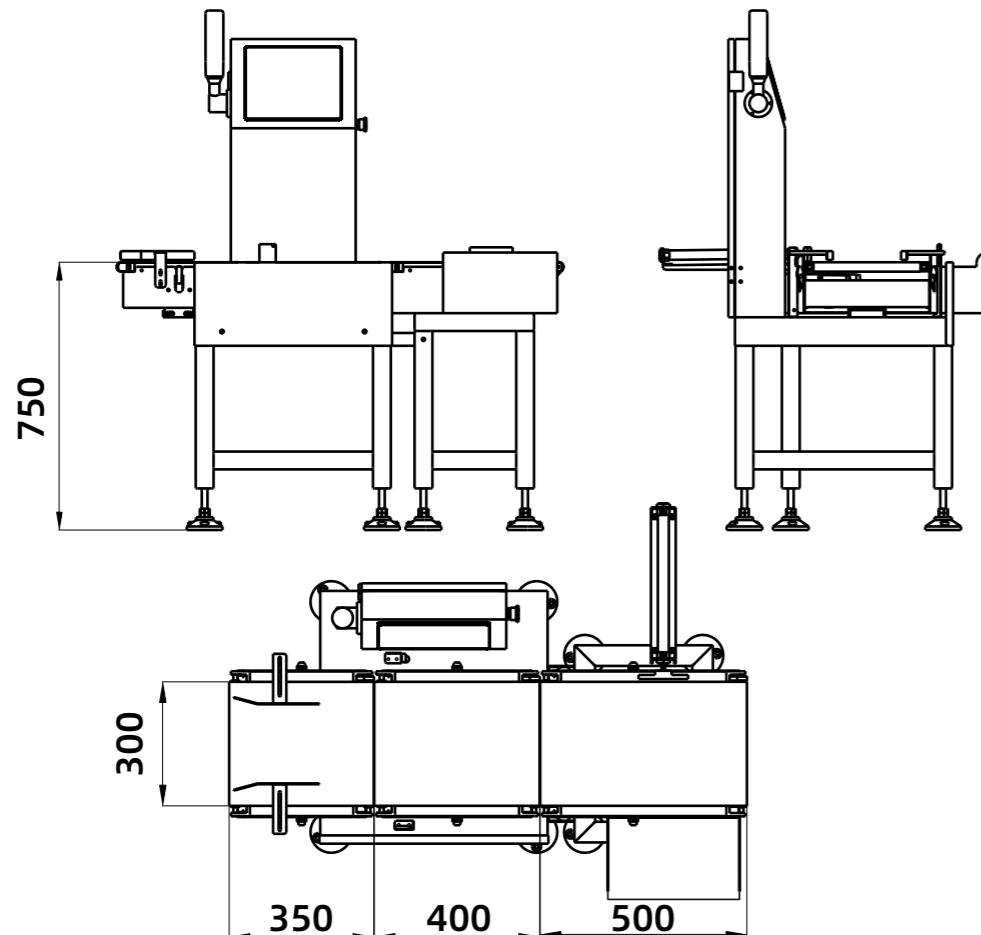



\*最高檢重速度和檢重精度，根據實際被檢測產品和安裝環境的不同而有所不同。

\*選型注意產品在皮帶線上的運動方向，產品透明或半透明物請與我司聯繫。

\* The maximum speed and precision of weight checking vary according to the actual products and installation environment.

\* Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

產品參數 Product parameters

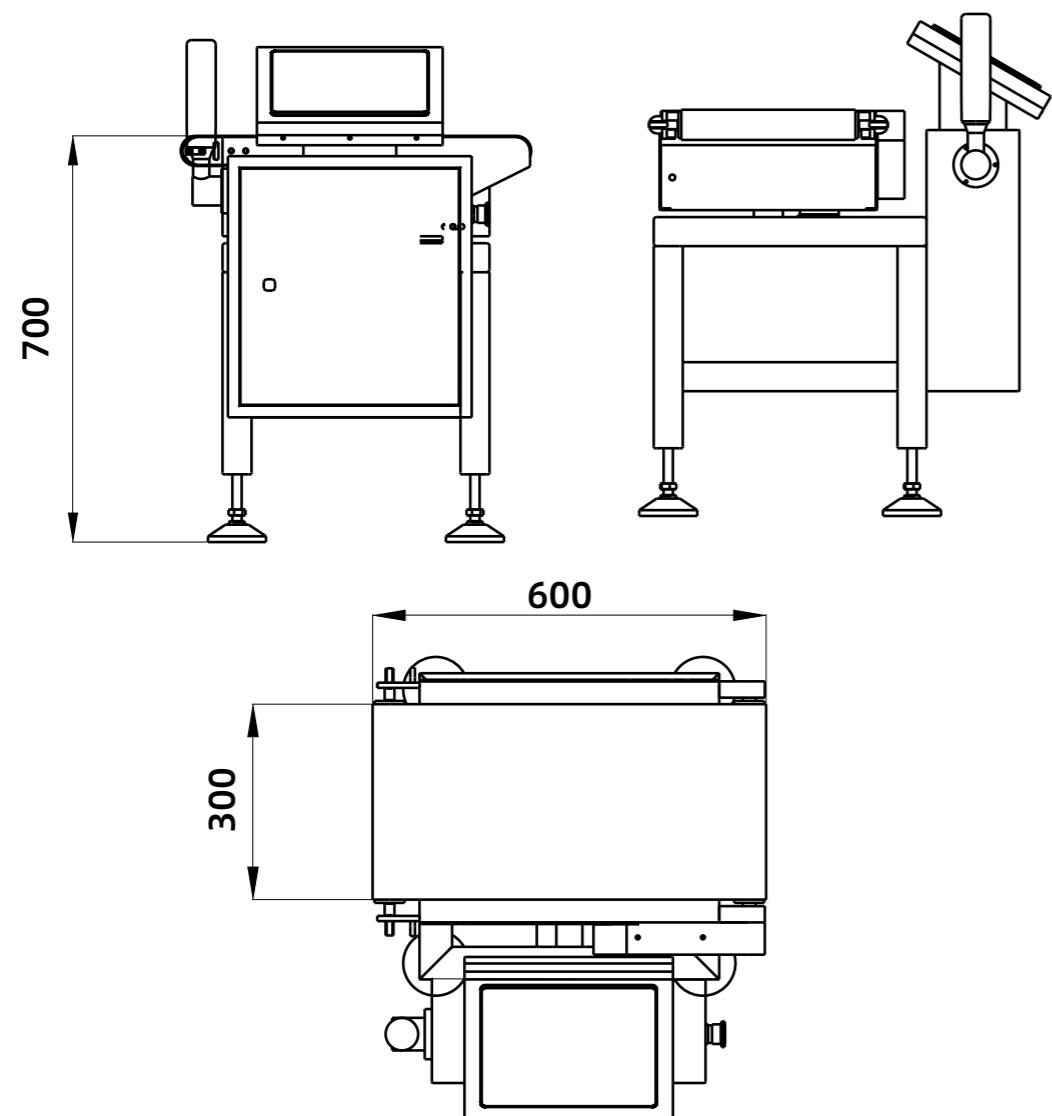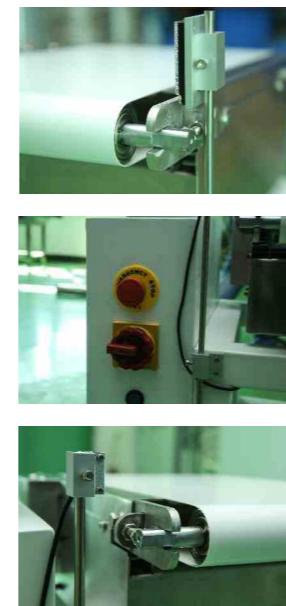


產品型號 Product model	DCM5030L5	DCM6030L10	DCM7030L15
顯示分度 Resolution	0.5g	1g	1g
檢重範圍 Weight checking range	3-5000g	0.01-10kg	0.05-15kg
檢重精度 Weight checking accuracy	±1-3g	±2-5g	±3-10g
秤重段尺寸 Size of weighing section	L 500mm*W 300mm	L:600mm*W 300mm	L 700mm*W 300mm
適檢產品尺寸 Suitable product size	L≤ 300mm; W≤ 300mm	L≤ 400mm; W≤ 300mm	L≤ 500mm; W≤ 300mm
秤重控制系統 Weighing Control System	大迪在線秤重控制系統 V1.1.5 DADI On-line weighing control system V1.1.5		
皮帶速度 Belt speed	5-80/分鐘 5-80m/min		
產品數量 Number of items	20-50種 20-50 items		
檢重段數 Sorting section	標準1段，可選3段 Standard 1 sections,optional 3 sections		
剔除裝置 Eliminating device	推桿式、下滑式可選 Push rod type and slide type optional		
標準技術參數 Standardtechnical parameters	電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源：乾燥的0.5~0.8MPa (5~8bar) 溫度：使用溫度：0°C~40°C, 儲存溫度：-20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30、IP54、IP65可選 噪聲：≤75db 機器重量：≈60kg 工作高度：700±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0-40 Storage temperature: -20-60. Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Noise: <75db Machine weight: 60kg Working Height: 700± 50mm (confirmed when ordering other heights)		
材質 Material	秤重傳感器：不銹鋼、鋁、合金鋼可選 滾筒：碳鋼 結構：不銹鋼304、碳鋼可選 輸送皮帶：黑色，PVC耐磨皮帶 Weighing Sensor: Stainless Steel, Aluminum, Alloy Steel Optional Roller: Carbon Steel Structure: stainless steel 304, carbon steel optional Conveyor Belt:Black, PVC wear-resistant belt		

\*最高檢重速度和檢重精度，根據實際被檢測產品和安裝環境的不同而有所不同。

\*選型注意產品在皮帶線上的運動方向，產品透明或半透明物請與我司聯繫。

\* The maximum speed and precision of weight checking vary according to the actual products and installation environment.

\* Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

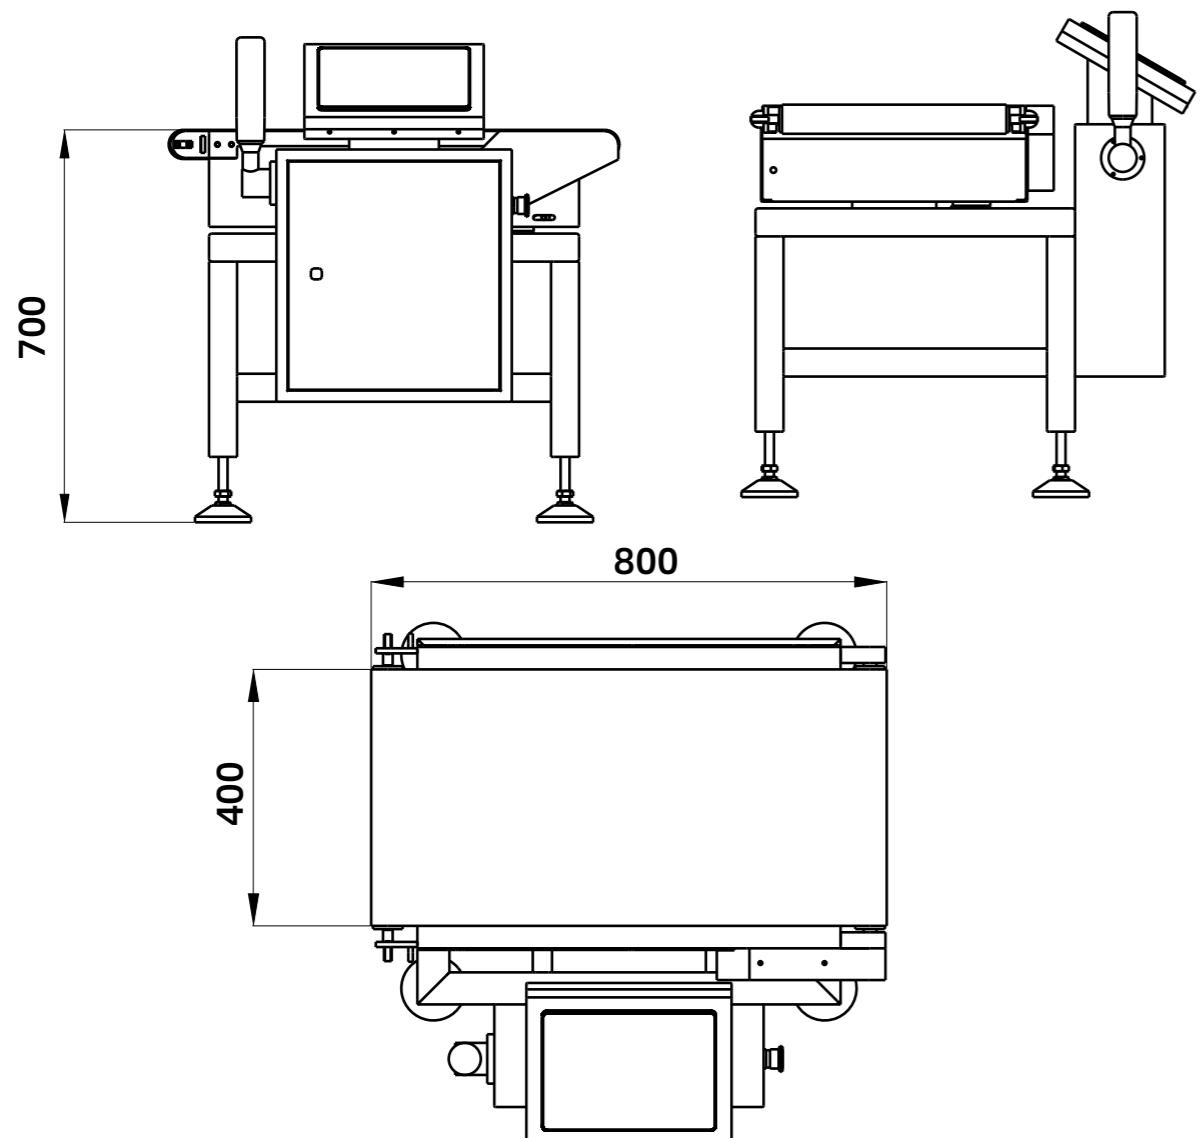

## 產品參數 Product parameters



產品型號 Product model	DCL6040L10	DCL8040L15	DCL10040L20
顯示分度 Resolution	1g	1g	1g
檢重範圍 Weight checking range	0.05-10kg	0.05-15kg	0.05-20kg
檢重精度 Weight checking accuracy	±3-5g	±5-10g	±8-15g
秤重段尺寸 Size of weighing section	L 600mm*W 400mm	L:800mm*W 400mm	L 1000mm*W 400mm
適檢產品尺寸 Suitable product size	L≤ 400mm,W≤ 400mm	L≤ 600mm,W≤ 400mm	L≤ 800mm,W≤ 400mm
秤重控制系統 Weighing Control System	大迪在線秤重控制系統 V1.1.5 DADI On-line weighing control system V1.1.5		
皮帶速度 Belt speed	5-80/分鐘 5-80m/min		
產品數量 Number of items	20-50種 20-50 items		
檢重段數 Sorting section	標準1段，可選3段 Standard 1 sections,optional 3 sections		
剔除裝置 Eliminating device	推桿式、下滑式可選 Push rod type and slide type optional		
標準技術參數 Standardtechnical parameters	電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源：乾燥的0.5~0.8MPa (5~8bar) 溫度：使用溫度: 0°C~40°C, 儲存溫度: -20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30、IP54、IP65可選 噪聲：≤75db 機器重量：≈60kg 工作高度：700±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0 40 Storage temperature: - 20 60. Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Noise: <75db Machine weight: 60kg Working Height: 700± 50mm (confirmed when ordering other heights)		
材質 Material	秤重傳感器：不銹鋼、鋁、合金鋼可選 滾筒：碳鋼 結構：不銹鋼304、碳鋼可選 輸送皮帶：黑色，PVC耐磨皮帶 Weighing Sensor: Stainless Steel, Aluminum, Alloy Steel Optional Roller: Carbon Steel Structure: stainless steel 304, carbon steel optional Conveyor Belt:Black, PVC wear-resistant belt		

\*最高檢重速度和檢重精度，根據實際被檢測產品和安裝環境的不同而有所不同。

\*選型注意產品在皮帶線上的運動方向，產品透明或半透明物請與我司聯繫。

\* The maximum speed and precision of weight checking vary according to the actual products and installation environment.

\* Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

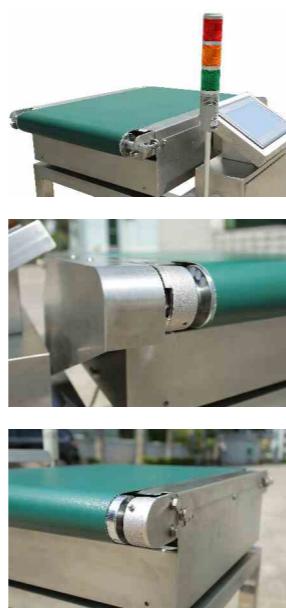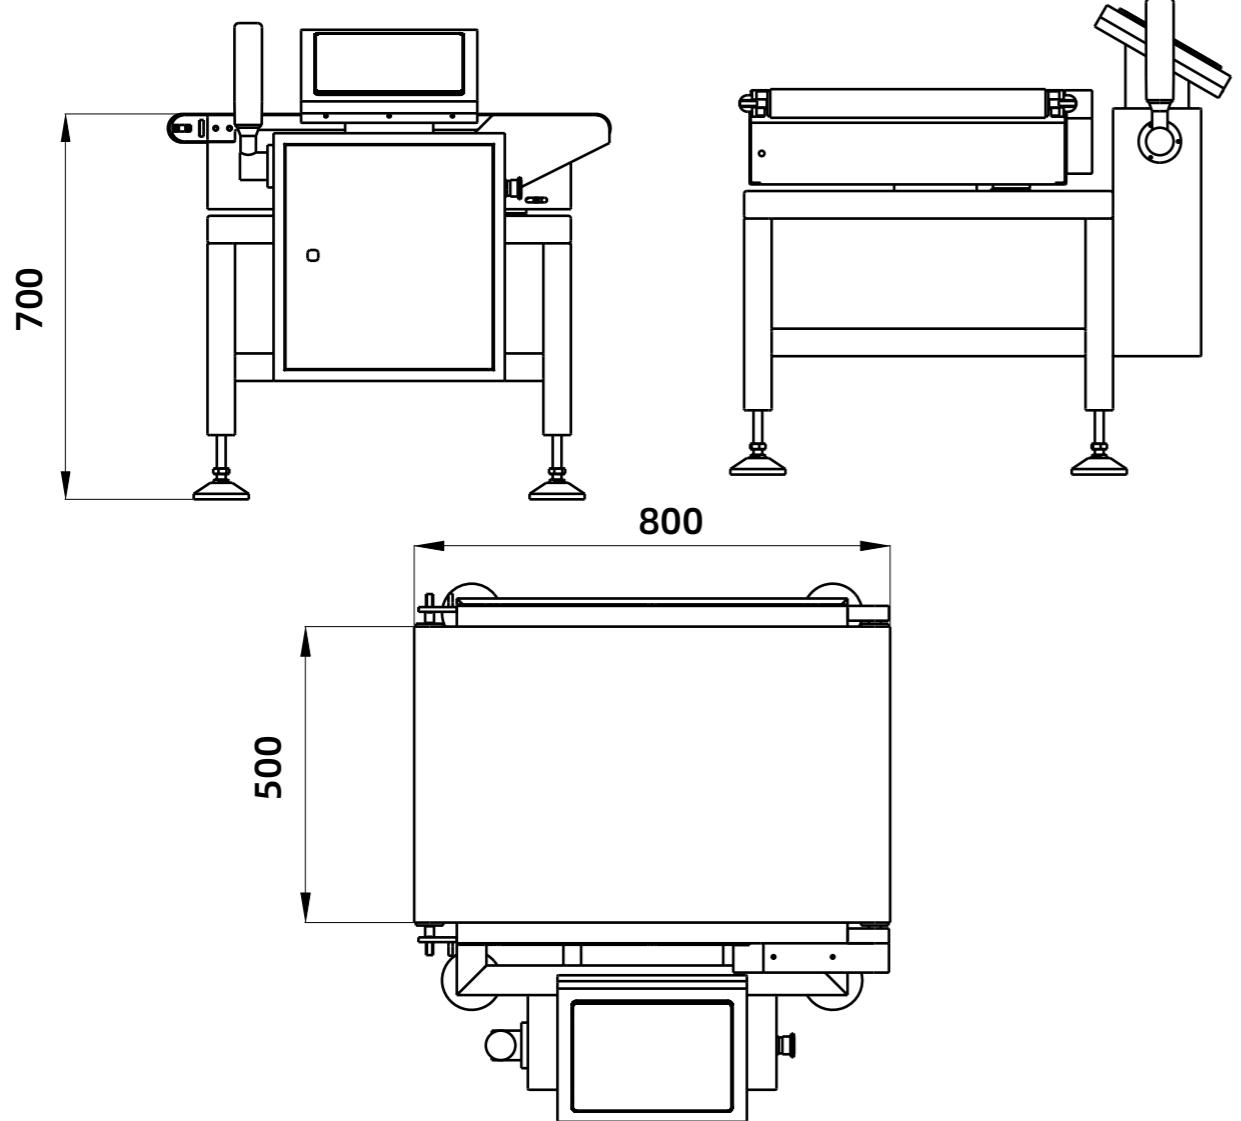

## 產品參數 Product parameters

產品型號 Product model	DCL8050L10	DCL10050L20	DCL12050L30
顯示分度 Resolution	1g	1g	1g
檢重範圍 Weight checking range	0.1-10kg	0.1-20kg	0.2-30kg
檢重精度 Weight checking accuracy	±5-10g	±10-15g	±10-15g
秤重段尺寸 Size of weighing section	L 800mm*W 500mm	L:1000mm*W500mm	L 1200mm*W 500mm
適檢產品尺寸 Suitable product size	L≤ 600mm,W≤ 500mm	L≤ 800mm,W≤ 500mm	L≤ 1000mm; W≤ 500mm
秤重控制系統 Weighing Control System	大迪在線秤重控制系統 V1.1.5 DADI On-line weighing control system V1.1.5		
皮帶速度 Belt speed	5-80/分鐘 5-80m/min		
產品數量 Number of items	20-50種 20-50 items		
檢重段數 Sorting section	標準1段，可選3段 Standard 1 sections,optional 3 sections		
剔除裝置 Eliminating device	推桿式、下滑式可選 Push rod type and slide type optional		
標準技術參數 Standardtechnical parameters	電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源：乾燥的0.5~0.8MPa (5~8bar) 溫度：使用溫度: 0°C~40°C, 儲存溫度: -20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30、IP54、IP65可選 噪聲：≤75db 機器重量：≈60kg 工作高度：700±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0 40 Storage temperature: - 20 60. Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Noise: <75db Machine weight: 60kg Working Height: 700± 50mm (confirmed when ordering other heights)		
材質 Material	秤重傳感器：不銹鋼、鋁、合金鋼可選 滾筒：碳鋼 結構：不銹鋼304、碳鋼可選 輸送皮帶：黑色, PVC耐磨皮帶 Weighing Sensor: Stainless Steel, Aluminum, Alloy Steel Optional Roller: Carbon Steel Structure: stainless steel 304, carbon steel optional Conveyor Belt:Black, PVC wear-resistant belt		


\*最高檢重速度和檢重精度，根據實際被檢測產品和安裝環境的不同而有所不同。

\*選型注意產品在皮帶線上的運動方向，產品透明或半透明物請與我司聯繫。

\* The maximum speed and precision of weight checking vary according to the actual products and installation environment.

\* Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

**08 大量程在線檢重秤**  
Online check and weigh scale for large range

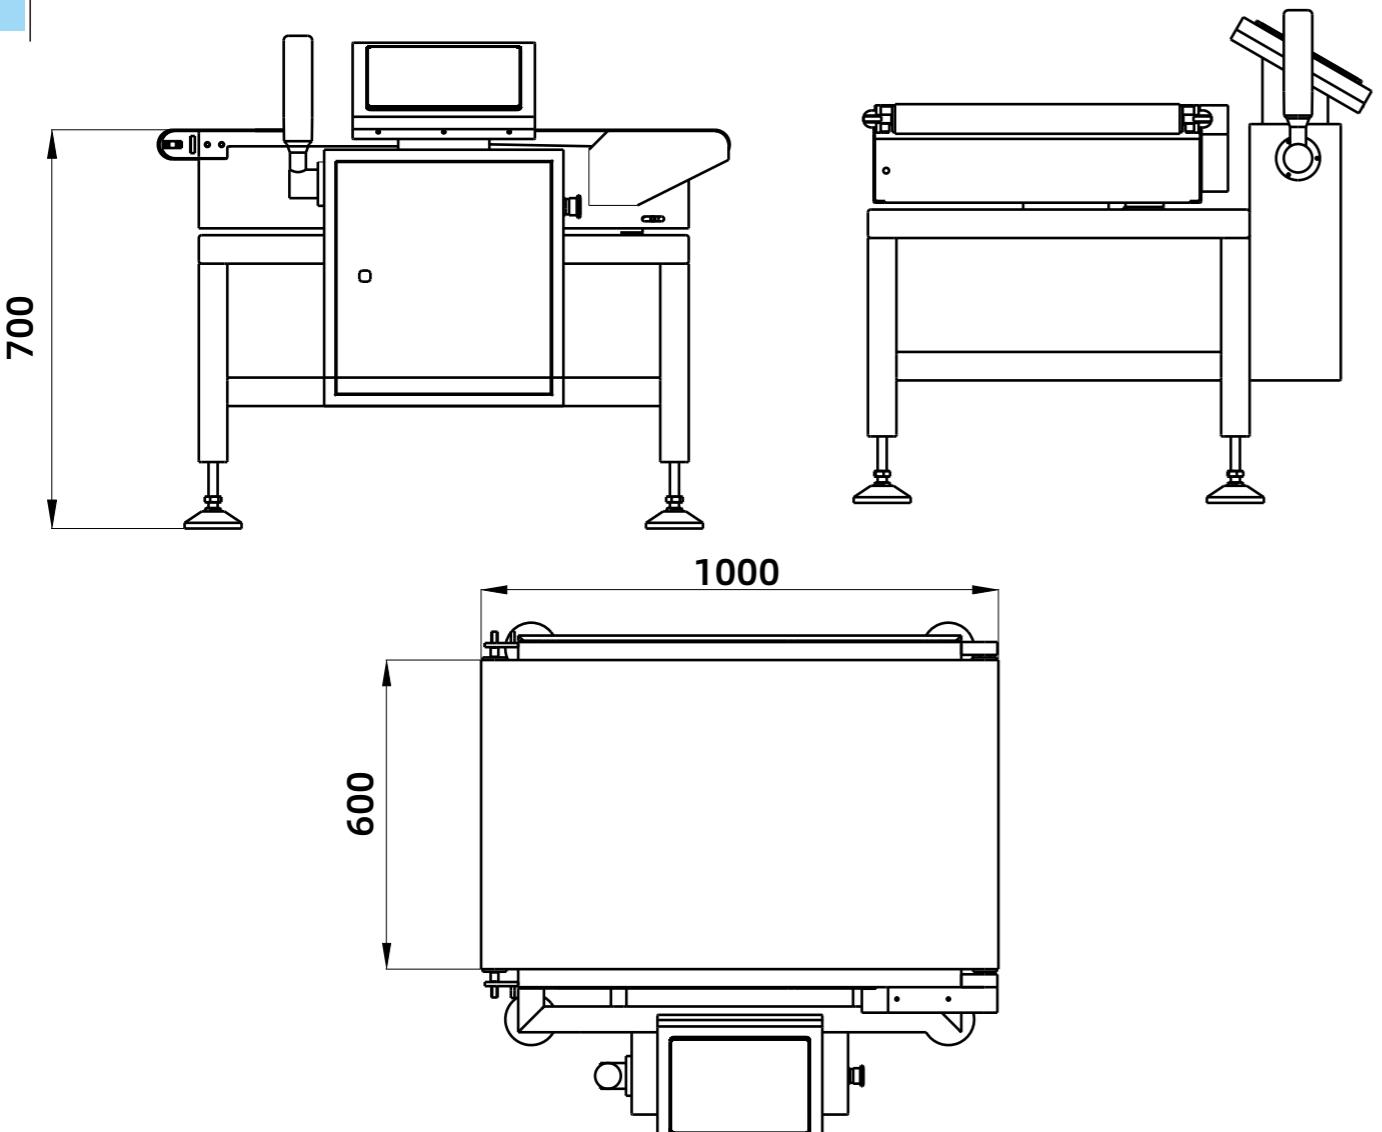

**產品參數 Product parameters**


產品型號 Product model	DCL8060L10	DCL10060L30	DCL12060L50
顯示分度 Resolution	1g	1g	1g
檢重範圍 Weight checking range	0.1-10kg	0.2-30kg	0.5-50kg
檢重精度 Weight checking accuracy	±8-15g	±10-15g	±10-15g
秤重段尺寸 Size of weighing section	L 800mm*W 600mm	L:1000mm*W600mm	L 1200mm*W 600mm
適檢產品尺寸 Suitable product size	L≤ 600mm; W≤ 600mm	L≤ 800mm; W≤ 600mm	L≤ 1000mm; W≤ 600mm
秤重控制系統 Weighing Control System	大迪在線秤重控制系統 V1.1.5 DADI On-line weighing control system V1.1.5		
皮帶速度 Belt speed	5-80/分鐘 5-80m/min		
產品數量 Number of items	20-50種 20-50 items		
檢重段數 Sorting section	標準1段，可選3段 Standard 1 sections,optional 3 sections		
剔除裝置 Eliminating device	推桿式、下滑式可選 Push rod type and slide type optional		
標準技術參數 Standardtechnical parameters	電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源：乾燥的0.5~0.8MPa (5~8bar) 溫度：使用溫度: 0°C~40°C, 儲存溫度: -20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30、IP54、IP65可選 噪聲：≤75db 機器重量：≈60kg 工作高度：700±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0 40 Storage temperature: - 20 60. Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Noise: <75db Machine weight: 60kg Working Height: 700± 50mm (confirmed when ordering other heights)		
材質 Material	秤重傳感器：不銹鋼、鋁、合金鋼可選 滾筒：碳鋼 結構：不銹鋼304、碳鋼可選 輸送皮帶：黑色，PVC耐磨皮帶 Weighing Sensor: Stainless Steel, Aluminum, Alloy Steel Optional Roller: Carbon Steel Structure: stainless steel 304, carbon steel optional Conveyor Belt:Black, PVC wear-resistant belt		

\*最高檢重速度和檢重精度，根據實際被檢測產品和安裝環境的不同而有所不同。

\*選型注意產品在皮帶線上的運動方向，產品透明或半透明物請與我司聯繫。

\* The maximum speed and precision of weight checking vary according to the actual products and installation environment.

\* Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

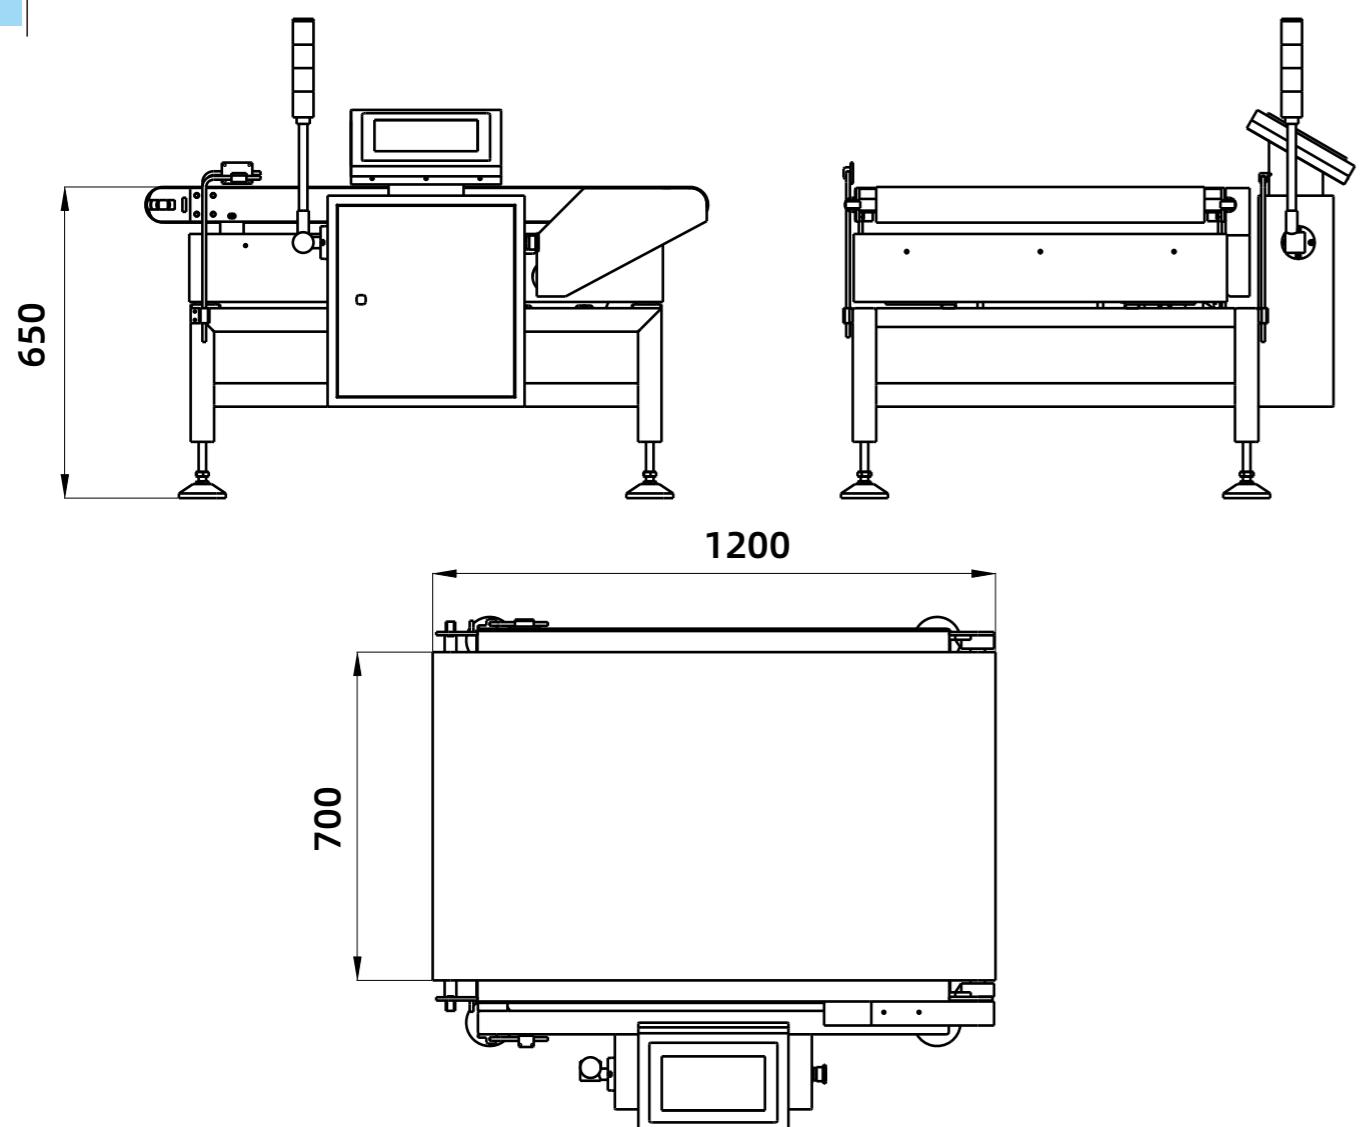

## 產品參數 Product parameters

產品型號 Product model	DCL8070L20	DCL10070L40	DCL12070L60
顯示分度 Resolution	1g	1g	5g
檢重範圍 Weight checking range	0.2-20kg	0.5-40kg	0.5-60kg
檢重精度 Weight checking accuracy	±10-15g	±10-20g	±10-20g
秤重段尺寸 Size of weighing section	L 800mm*W 700mm	L:1000mm*W700mm	L 1200mm*W 700mm
適檢產品尺寸 Suitable product size	L≤ 600mm; W≤ 700mm	L≤ 800mm; W≤ 700mm	L≤ 1000mm; W≤ 700mm
秤重控制系統 Weighing Control System	大迪在線秤重控制系統 V1.1.5 DADI On-line weighing control system V1.1.5		
皮帶速度 Belt speed	5-80/分鐘 5-80m/min		
產品數量 Number of items	20-50種 20-50 items		
檢重段數 Sorting section	標準1段，可選3段 Standard 1 sections,optional 3 sections		
剔除裝置 Eliminating device	推桿式、下滑式可選 Push rod type and slide type optional		
標準技術參數 Standardtechnical parameters	電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源：乾燥的0.5~0.8MPa (5~8bar) 溫度：使用溫度: 0°C~40°C, 儲存溫度: -20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30、IP54、IP65可選 噪聲：≤75db 機器重量：≈60kg 工作高度：650±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0 40 Storage temperature: - 20 60. Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Noise: <75db Machine weight: 60kg Working Height: 650± 50mm (confirmed when ordering other heights)		
材質 Material	秤重傳感器：不銹鋼、鋁、合金鋼可選 滾筒：碳鋼 結構：不銹鋼304、碳鋼可選 輸送皮帶：黑色, PVC耐磨皮帶 Weighing Sensor: Stainless Steel, Aluminum, Alloy Steel Optional Roller: Carbon Steel Structure: stainless steel 304, carbon steel optional Conveyor Belt:Black, PVC wear-resistant belt		


\*最高檢重速度和檢重精度，根據實際被檢測產品和安裝環境的不同而有所不同。

\*選型注意產品在皮帶線上的運動方向，產品透明或半透明物請與我司聯繫。

\* The maximum speed and precision of weight checking vary according to the actual products and installation environment.

\* Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

10 大量程在線檢重秤  
Online check and weigh scale for large range

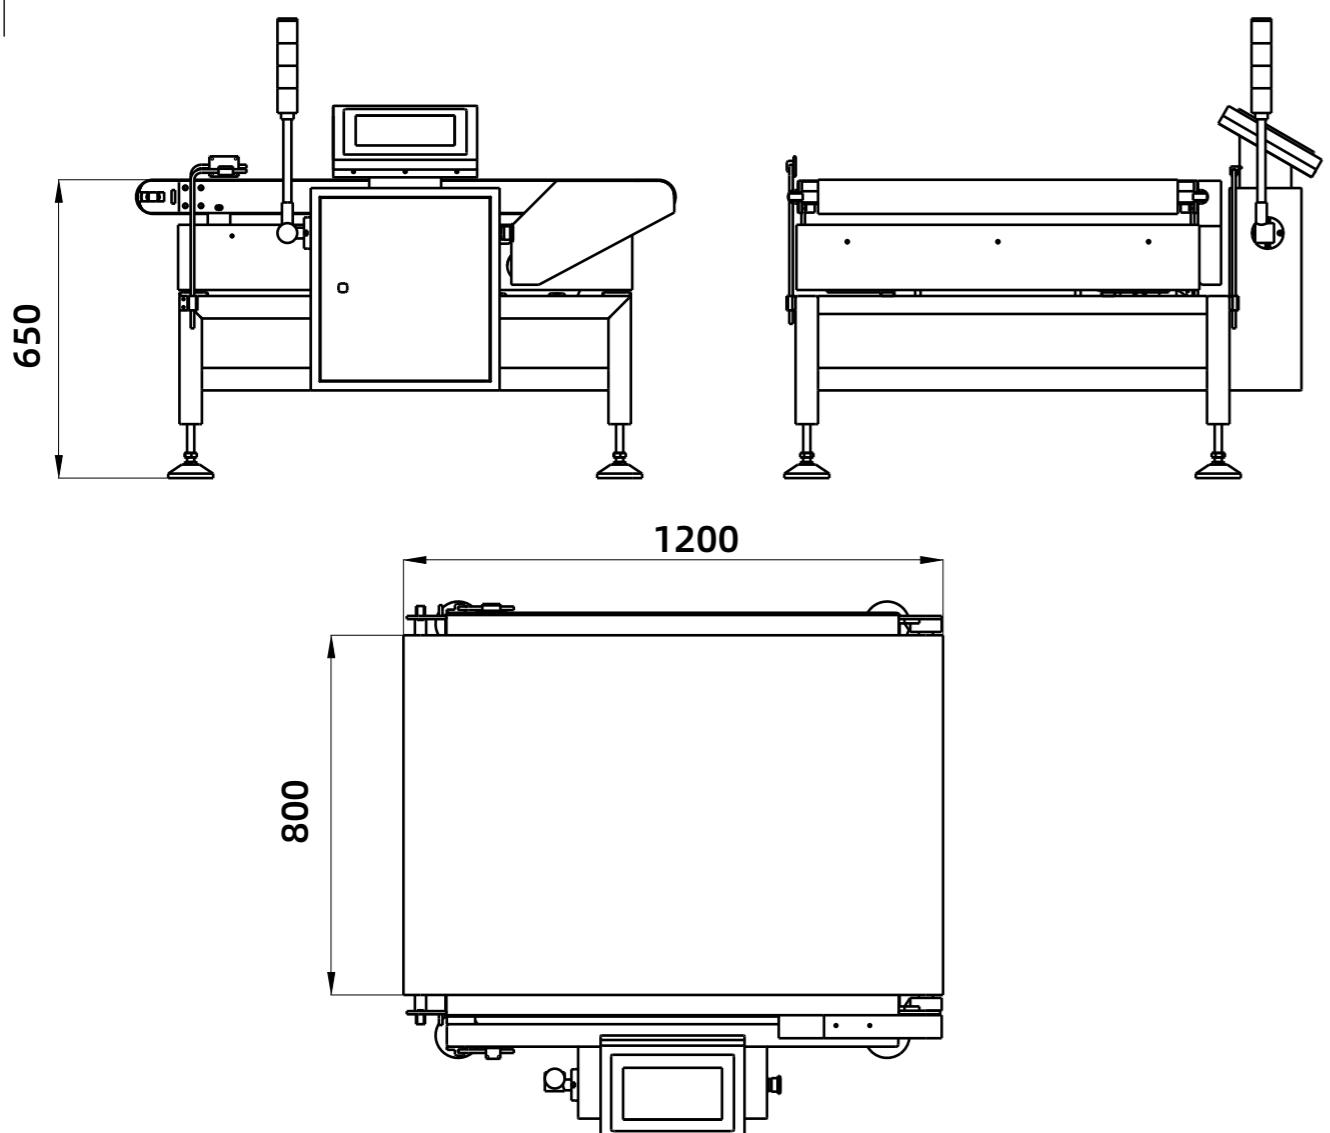

產品參數 Product parameters

產品型號 Product model	DCL80080L20	DCL10080L40	DCL12080L60
顯示分度 Resolution	1g	1g	5g
檢重範圍 Weight checking range	0.2-20kg	0.5-40kg	0.5-60kg
檢重精度 Weight checking accuracy	±10-15g	±10-20g	±10-25g
秤重段尺寸 Size of weighing section	L 800mm*W 800mm	L:1000mm*W800mm	L 1200mm*W 800mm
適檢產品尺寸 Suitable product size	L≤ 600mm; W≤ 800mm	L≤ 800mm; W≤ 800mm	L≤ 1000mm; W≤ 800mm
秤重控制系統 Weighing Control System	大迪在線秤重控制系統 V1.1.5 DADI On-line weighing control system V1.1.5		
皮帶速度 Belt speed	5-80/分鐘 5-80m/min		
產品數量 Number of items	20-50種 20-50 items		
檢重段數 Sorting section	標準1段，可選3段 Standard 1 sections,optional 3 sections		
剔除裝置 Eliminating device	推桿式、下滑式可選 Push rod type and slide type optional		
標準技術參數 Standardtechnical parameters	電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源：乾燥的0.5~0.8MPa (5~8bar) 溫度：使用溫度: 0°C~40°C, 儲存溫度: -20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30、IP54、IP65可選 噪聲：≤75db 機器重量：≈60kg 工作高度：650±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0 40 Storage temperature: - 20 60. Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Noise: <75db Machine weight: 60kg Working Height: 650± 50mm (confirmed when ordering other heights)		
材質 Material	秤重傳感器：不銹鋼、鋁、合金鋼可選 滾筒：碳鋼 結構：不銹鋼304、碳鋼可選 輸送皮帶：黑色, PVC耐磨皮帶 Weighing Sensor: Stainless Steel, Aluminum, Alloy Steel Optional Roller: Carbon Steel Structure: stainless steel 304, carbon steel optional Conveyor Belt:Black, PVC wear-resistant belt		


\*最高檢重速度和檢重精度，根據實際被檢測產品和安裝環境的不同而有所不同。

\*選型注意產品在皮帶線上的運動方向，產品透明或半透明物請與我司聯繫。

\* The maximum speed and precision of weight checking vary according to the actual products and installation environment.

\* Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

11 大量程在線檢重秤  
Online check and weigh scale for large range

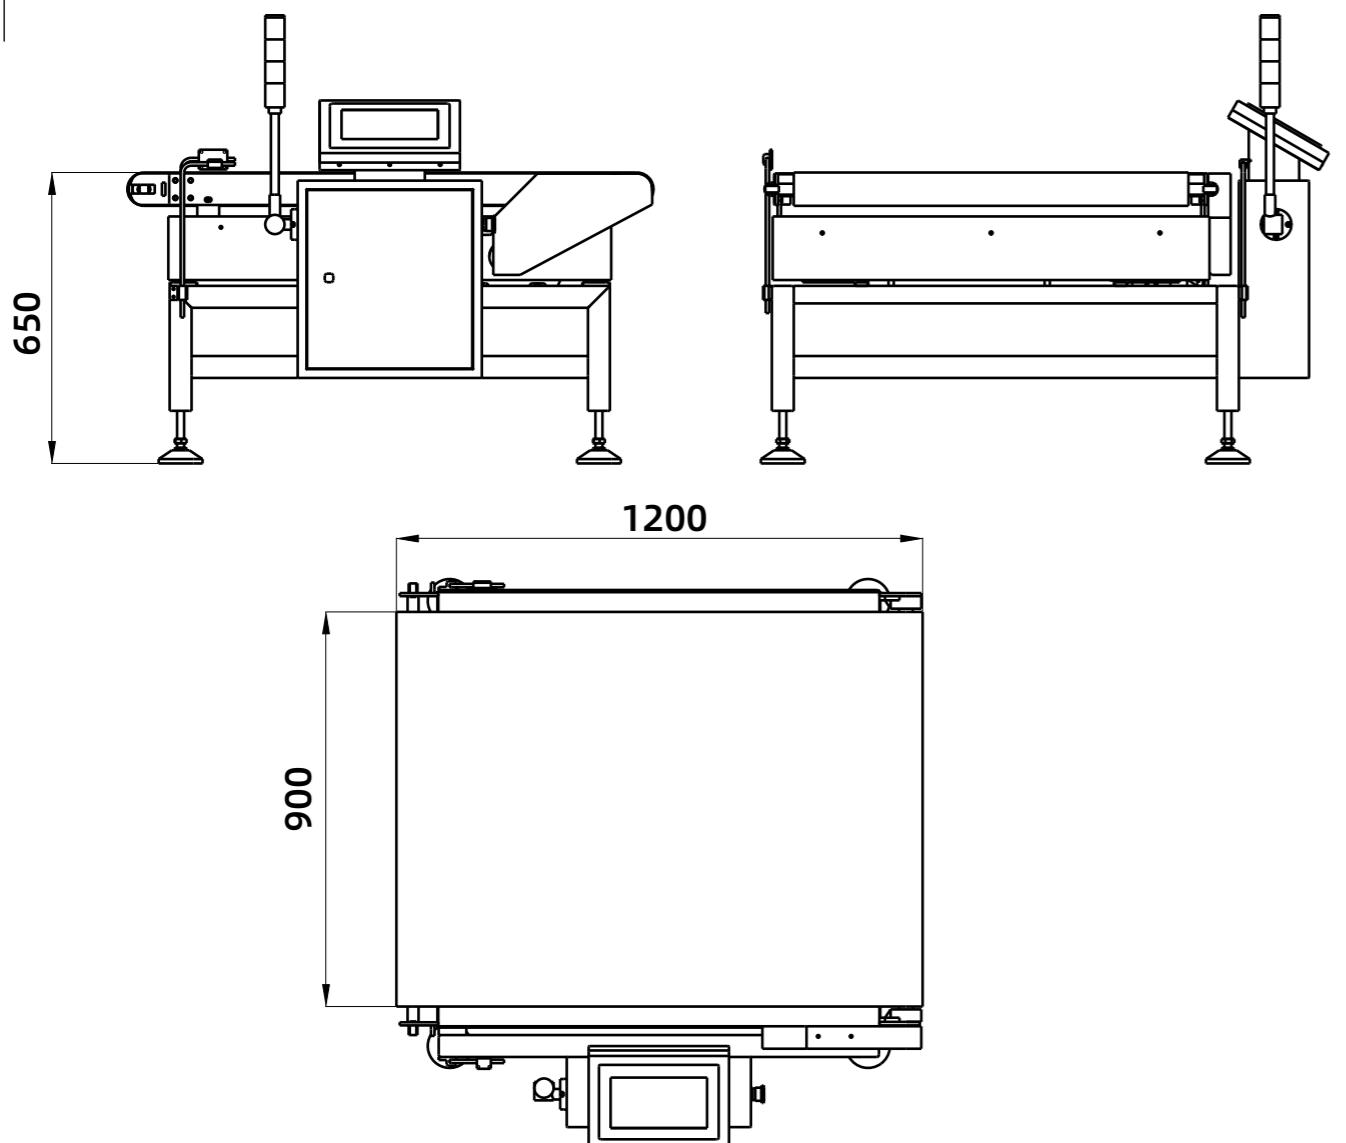

產品參數 Product parameters

產品型號 Product model	DCL10090L30	DCL12090L60	DCL15090L100
顯示分度 Resolution	1g	5g	5g
檢重範圍 Weight checking range	0.5-30kg	0.5-60kg	1-100kg
檢重精度 Weight checking accuracy	±10-20g	±10-25g	±15-30g
秤重段尺寸 Size of weighing section	L 1000mm*W 900mm	L:1200mm*W900mm	L 1500mm*W 900mm
適檢產品尺寸 Suitable product size	L≤ 800mm; W≤ 900mm	L≤ 1000mm; W≤ 900mm	L≤ 1300mm; W≤ 900mm
秤重控制系統 Weighing Control System	大迪在線秤重控制系統 V1.1.5 DADI On-line weighing control system V1.1.5		
皮帶速度 Belt speed	5-80/分鐘 5-80m/min		
產品數量 Number of items	20-50種 20-50 items		
檢重段數 Sorting section	標準1段，可選3段 Standard 1 sections,optional 3 sections		
剔除裝置 Eliminating device	推桿式、下滑式可選 Push rod type and slide type optional		
標準技術參數 Standardtechnical parameters	電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源：乾燥的0.5~0.8MPa (5~8bar) 溫度：使用溫度: 0°C~40°C, 儲存溫度: -20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30、IP54、IP65可選 噪聲：≤75db 機器重量：≈60kg 工作高度：650±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0~40 Storage temperature: -20~60. Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Noise: <75db Machine weight: 60kg Working Height: 650± 50mm (confirmed when ordering other heights)		
材質 Material	秤重傳感器：不銹鋼、鋁、合金鋼可選 滾筒：碳鋼 結構：不銹鋼304、碳鋼可選 輸送皮帶：黑色，PVC耐磨皮帶 Weighing Sensor: Stainless Steel, Aluminum, Alloy Steel Optional Roller: Carbon Steel Structure: stainless steel 304, carbon steel optional Conveyor Belt:Black, PVC wear-resistant belt		

\*最高檢重速度和檢重精度，根據實際被檢測產品和安裝環境的不同而有所不同。

\*選型注意產品在皮帶線上的運動方向，產品透明或半透明物請與我司聯繫。

\* The maximum speed and precision of weight checking vary according to the actual products and installation environment.

\* Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.



## 產品參數 Product parameters

產品型號 Product model	DCF3512LC05-20	DCF3516LC1-20	DCF3523LC2-20	DCF3530LC3-20
顯示分度 Resolution	0.01g	0.05g	0.1g	0.2g
分選範圍 Sorting range	1-500g	1-1000g	1-2000g	1-3000g
分選精度 The sorting accuracy	±0.15-0.3g	±0.2-0.5g	±0.5-1g	±0.8-2g
秤重段尺寸 Size of weighing section	L 350mm*W 120mm	L 350mm*W 160mm	L 350mm*W 230mm	L 350mm*W 300mm
分選產品尺寸範圍 Size range of sorting products	L≤200mm; W≤120mm	L≤200mm; W≤160mm	L≤200mm; W≤230mm	L≤200mm; W≤300mm
分選控制系統 Sorting Control System	大迪在線秤重分選控制系統V1.1.5 DADI Online weighing and sorting control system v1.1.5			
分選速度 Sorting speed	5-90/分鐘 5-90m/min			
產品數量 Number of items	20-50種 20-50 items			
分選級數 Grades	2~20級可訂製 Level 2-20 customizable			
分選方式 Sorting method	氣吹式、推桿式、撥桿式可選 Air-blown, push-rod and pull-rod type are optional			
標準技術參數 Standardtechnical parameters	電源: 標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源: 乾燥的0.5~0.8MPa (5~8bar) 溫度: 使用溫度: 0°C~40°C, 儲存溫度: -20°C~60°C 濕度: 10~90%RH, 無冷凝 防護等級: IP30、IP54、IP65可選 噪聲: <75db 機器重量: ≈70kg 工作高度: 750±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0-40 Storage temperature: -20-60. Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Noise: <75db Machine weight: 70kg Working Height: 750± 50mm (confirmed when ordering other heights)			
材質 Material	秤重傳感器: 鋁、不銹鋼可選 滾筒: 鋁 結構: 不銹鋼304 輸送皮帶: 白色, 食品級, 聚氨酯熱塑性塑料 (TPU) Weighing Sensor: Aluminum and stainless steel optional Roller: Aluminum Structure: stainless steel 304 Conveyor Belt: White, Food Grade, Polyurethane Thermoplastic (TPU)			

\*最高檢重速度和檢重精度，根據實際被檢測產品和安裝環境的不同而有所不同。


\*選型注意產品在皮帶線上的運動方向，產品透明或半透明物請與我司聯繫。

\* The maximum speed and precision of weight checking vary according to the actual products and installation environment.

\* Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.


## 自動稱重、掃碼、智能貼標一體機

Automatic weighing, scanning code, intelligent labeling machine

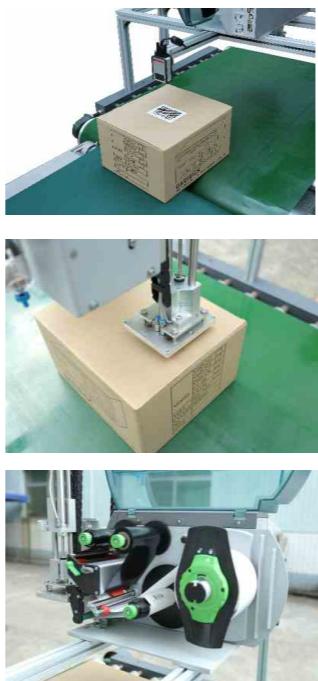

## 產品參數 Product parameters

產品型號 Product model	DCDL3530L1	DCD8050L30	DCD10080L60
顯示分度 Resolution	0.1g	1g	5g
秤重範圍 Weight checking range	1-1000g	0.1-30kg	0.5-60kg
秤重精度 Weight checking accuracy	±0.5-2g	±10-20g	±10-25g
秤重段尺寸 Size of weighing section	L 350mm*W 300mm	L800mm*W500mm	L 1000mm*W 800mm
適檢產品尺寸 Suitable product size	L≤ 200mm; W≤ 300mm	L≤ 600mm ;W≤ 800mm	L≤ 800mm ; W≤ 800mm
控制系統 Control System	大迪在線秤重、掃碼、打印貼標、體積測量控制系統V1.2.5 DADI On-line weighing, scanning, printing and labeling, volume measurement control system V1.2.5		
皮帶速度 Belt speed	5-80/分鐘 5-80m/min		
產品數量 Number of items	20-50種 20-50 items		
掃描方式/掃描角度 Scanning mode/Scanning angle	二維影像式 (838*640像素) / 水平42.4°, 垂直33° Two-dimensional image format (838*640 pixels) / 42.4 degrees horizontally and 33 degrees vertically		
打印模式/打印分辨率 Print mode/print resolution	熱轉印 / 300-600點 Thermal transfer printing / 300-600DPI		
貼標方式/貼標方向 Labeling method/direction	接受指令感應式自動貼標 / ±1mm (與產品定位精度有關) Acceptance of Instruction Induction Automatic Labeling / ±1mm (related to the positioning accuracy of products)		
貼標速度/貼標精度 Labeling speed and accuracy	≤30張/分鐘 (與打印標簽規格、數據接收時間有關) / 水平方向出紙 ≤30pcs/min (related to the specifications of printing labels and the time of receiving data) / Horizontal paper delivery		
體積測量範圍 Volumetric measurement range	5*5*5 (cm) ~60*60*60 (cm)		
體積測量精度 Accuracy of volume measurement	±0.5cm		
標準技術參數 Standardtechnical parameters	電源: 標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源: 乾燥的0.5~0.8MPa (5~8bar) 防護等級: IP30、IP54選 機器重量: ≈100kg 工作高度: 650±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Protection Level: IP30, IP54are optional Machine weight: 100kg Working Height: 650± 50mm (confirmed when ordering other heights)		
材質 Material	秤重傳感器: 不銹鋼、鋁、合金鋼可選 滾筒: 碳鋼 結構: 不銹鋼304、碳鋼可選 輸送皮帶: 黑色, PVC耐磨皮帶 Weighing Sensor: Stainless Steel, Aluminum, Alloy Steel Optional Roller: Carbon Steel Structure: stainless steel 304, carbon steel optional Conveyor Belt:Black, PVC wear-resistant belt		

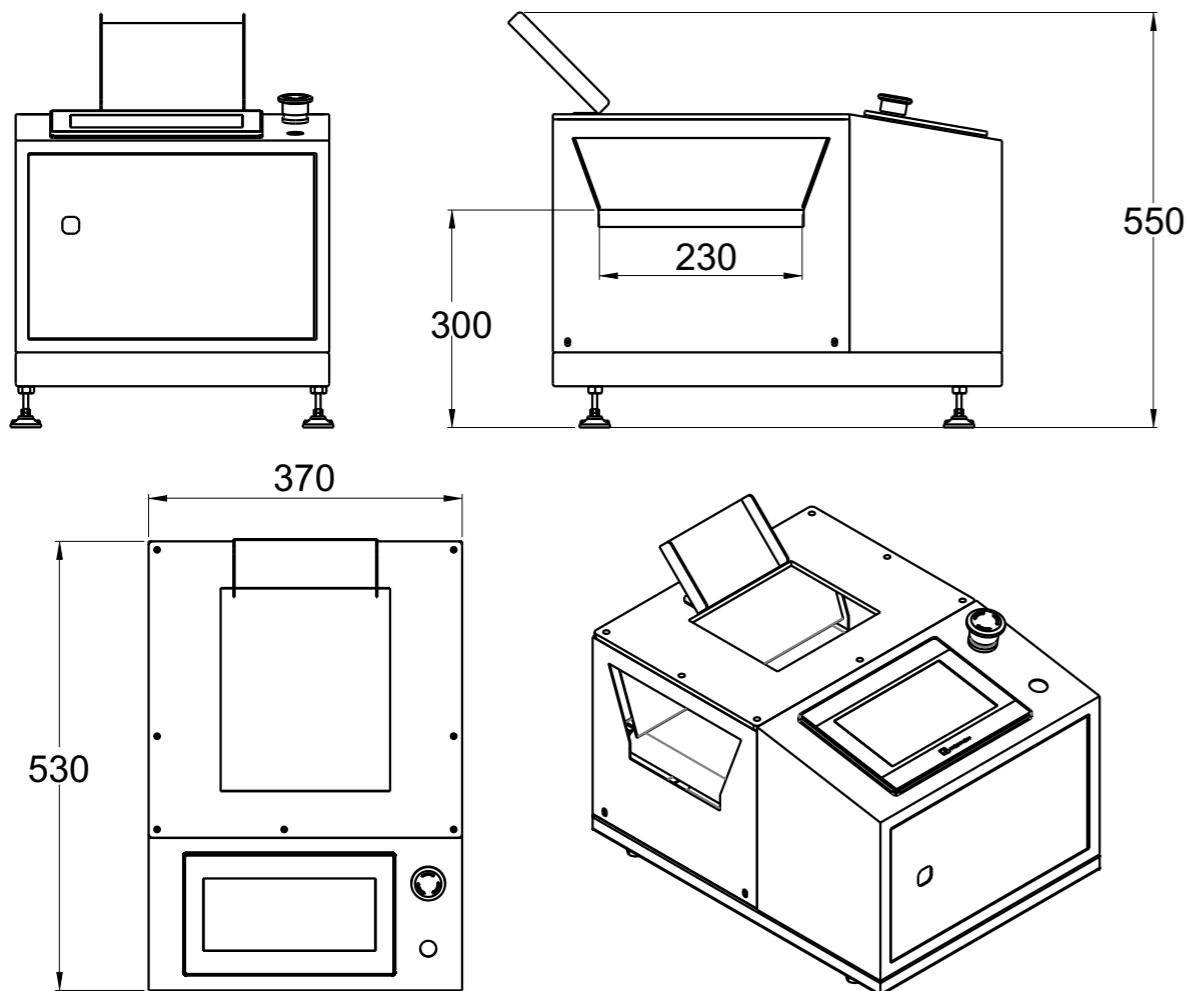

## 產品參數 Product parameters

產品型號 Product model	DCB230FR02	DCB300FR3
顯示分度 Resolution	0.02g	0.5g
檢重範圍 Weight checking range	1-200g	1-3000g
檢重精度 Weight checking accuracy	±0.1-0.3g	±0.5-2g
秤重段尺寸 Size of weighing section	L 350mm*W 230mm	L400mm*W300mm
適檢產品尺寸 Suitable product size	L≤ 200mm; W≤ 200mm	L≤ 300mm; W≤ 250mm
秤重控制系統 Weighing Control System	大迪靜態秤重控制系統V221.2 DADI Static Weighing Control System V221.2	
分選速度 Sorting speed	20-35件/分鐘 20-35pcs/min	
產品數量 Number of items	10-50種 10-50 items	
檢重段數 Sorting section	標準1段，可選3段 Standard 1 sections,optional 3 sections	
分選方式 Sorting method	正轉、反轉選別 Positive and Reverse Selection	
標準技術參數 Standardtechnical parameters	電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源：乾燥的0.5~0.8MPa (5~8bar) 溫度：使用溫度: 0°C~40°C, 儲存溫度: -20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30、IP54、IP65可選 噪聲：≤75db 機器重量：≈20kg 工作高度：200±30mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0~40°C Storage temperature: -20~60°C Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Noise: <75db Machine weight: 20kg Working Height: 200±30mm (confirmed when ordering other heights)	
材質 Material	秤重傳感器：鋁、不銹鋼可選 滾筒：鋁 結構：不銹鋼304 輸送皮帶：白色，食品級，聚氨酯熱塑性塑料 (TPU) Weighing Sensor: Aluminum and stainless steel optional Roller: Aluminum Structure: stainless steel 304 Conveyor Belt: White, Food Grade, Polyurethane Thermoplastic (TPU)	

\*最高檢重速度和檢重精度，根據實際被檢測產品和安裝環境的不同而有所不同。

\*選型注意產品在皮帶線上的運動方向，產品透明或半透明物請與我司聯繫。

\* The maximum speed and precision of weight checking vary according to the actual products and installation environment.


\* Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.



## 產品參數 Product parameters

產品型號 Product model	DCJ3023L05-15	DCJ3530L1-15	DCJ5040L5-20
顯示分度 Resolution	0.05g	0.1g	0.1g
秤重範圍 Weight checking range	1-500g	1-1000g	2-5000g
秤重精度 Weight checking accuracy	±0.2-0.5g	±0.3-0.6g	±1-5g
空机检测灵敏度 Empty machine Detection Sensitivity	Fe: ≥0.8mm; SUS: 1.6mm	Fe: ≥0.8mm; SUS: 1.6mm	Fe: ≥1.5mm; SUS: 2.5mm
秤重段尺寸 Size of weighing section	L 300mm*W230mm	L:350mm*W 300mm	L 500mm*W 400mm
金检通道尺寸 Size of golden inspection	W:300mm*H150mm	W:300mm*H150mm	W:400mm*H200mm
適檢產品尺寸 Suitable product size	L≤200mm; W≤230mm; H≤150mm;	L≤230mm; W≤300mm H≤150mm;	L≤350mm; W≤400mm H≤200mm;
秤重控制系統 Weighing Control System	大迪在線秤重金屬檢測控制系統V1.1.5 On-line Heavy Metal Detection and Control System of DADI ScaleV1.1.5		
皮帶速度 Belt speed	5-40米/分鐘 5-40m/min		
產品數量 Number of items	20-50種 20-50 items		
檢測方式 Detection methods	電磁感應/數字秤重傳感器 Electromagnetic Induction/Digital Weighing Sensor		
剔除裝置 Eliminating device	氣吹式、推桿式、撥桿式、上下翻板可選 Air blowing, push rod, baffle, top and bottom turning plate are optional		
標準技術參數 Standard technical parameters	電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 氣源：乾燥的0.5~0.8MPa (5~8bar) 溫度：使用溫度: 0°C~40°C, 儲存溫度: -20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30, IP54, IP65可選 機器重量：≈160kg 工作高度：750±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Air Source: Dry 0.5-0.8 MPa (5-8 bar) Temperature: Use temperature: 0-40 Storage temperature: -20-60. Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Machine weight: 160kg Working Height: 750±50mm (confirmed when ordering other heights)		
材質 Material	秤重傳感器：鋁、不銹鋼可選 滾筒：鋁 結構：不銹鋼304 輸送皮帶：白色，食品級，聚氨酯熱塑性塑料 (TPU) Weighing Sensor: Aluminum and stainless steel optional Roller: Aluminum Structure: stainless steel 304 Conveyor Belt: White, Food Grade, Polyurethane Thermoplastic (TPU)		




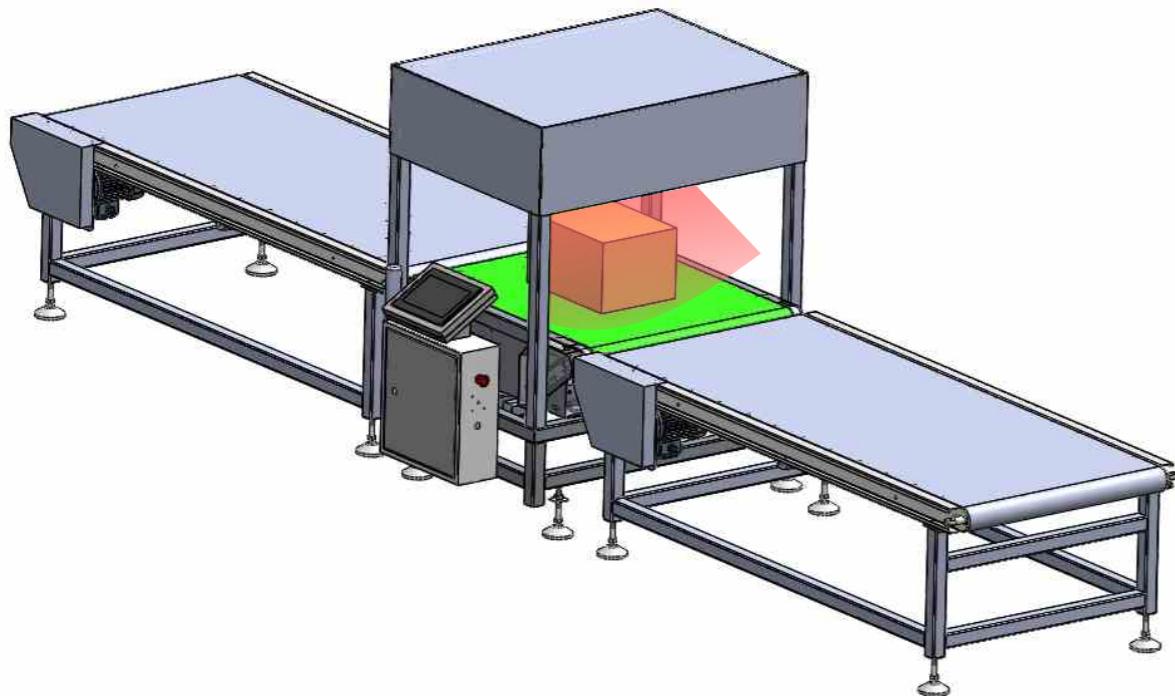

## 產品參數 Product parameters

產品型號 Product model	DVCJ6060T30	DVCJ10080L60
顯示分度 Resolution	0.001kg	0.001kg
秤重範圍 Weight checking range	1-30kg	1-60kg
秤重精度 Weight checking accuracy	±5-10g	±15-30g
秤重段尺寸 Size of weighing section	L 800mm*W 800mm	L:1000mm*W 800mm
適檢產品尺寸 Suitable product size	L≤200mm; W≤230mm;	L≤230mm; W≤300mm
秤重控制系統 Weighing Control System	大迪在線秤重、扫码、体积测量控制系统V1.1.5 DADI on-line weighing, scanning and volume measurement control system V1.1.5	
皮帶速度 Belt speed	10-80米/分鐘 10-80m/min	

檢測方式 Detection methods	视觉相机扫描/數字秤重傳感器 Visual Camera Scanning/Digital Weighing Sensor
---------------------------	--

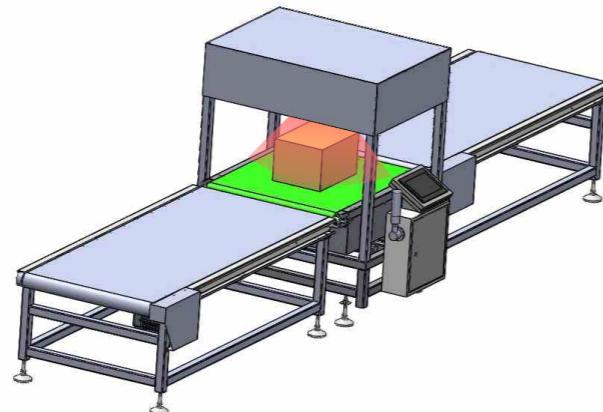

標準技術參數 Standard technical parameters	電源：標準單相AC200~240V, 50/60HZ, 0.4KW, 可選三相AC380V, 50/60HZ, 0.4KW 溫度：使用溫度: 0°C~40°C, 儲存溫度: -20°C~60°C 濕度：10~90%RH, 無冷凝 防護等級：IP30、IP54、IP65可選 機器重量：≈160kg 工作高度：750±50mm (其他高度訂貨時確認) Power supply: standard single-phase AC200-240V, 50/60HZ, 0.4KW, optional three-phase AC380V, 50/60HZ, 0.4KW Temperature: Use temperature: 0-40 Storage temperature: -20-60. Humidity: 10-90% RH, no condensation Protection Level: IP30, IP54, IP65 are optional Machine weight: 160kg Working Height: 750±50mm (confirmed when ordering other heights)
材質 Material	秤重傳感器：鋁、不銹鋼可選 視覺扫码相机：海康/大华 滾筒：鋁 結構：不銹鋼304 輸送皮帶：白色，食品級，聚氨酯熱塑性塑料 (TPU) Weighing Sensor: Aluminum and stainless steel optional Visual Scanning Camera: Haikang/Dahua Roller: Aluminum Structure: stainless steel 304 Conveyor Belt: White, Food Grade, Polyurethane Thermoplastic (TPU)

## 17 剔除方式 Reject mode

### ■ 推桿式 Push rod type



適合硬包裝、箱式包裝產品(塑料膜包裝需加裝剔除刷)

Suitable for hard packaging and box packaging products(Plastic film ackaging need to install brush out)

### ■ 撥桿式 Swing arm type



適合不是太高或太薄的包裝產品

For packaging products that are not too high or too thin

### ■ 氣吹式 Air blowing type



適合500g以下的輕包裝產品

Light packaging products suitable for less than 500g

### ■ 跌落式 Drop type



適合薄袋產品或片狀產品

Suitable for thin bag or sheet products

## 典型客戶 Typical Customers



## 合作伙伴 Partners



期待您的加入.....