

EAST E500 GROW ROOM DEHUMIDIFIER

PERFORMANCE PARAMETERS


Water Removal @80°F, RH60%	500 Pints/Day
Water Removal @30°C, RH80%	320 Liters/Day (680 Pints/Day)
Efficiency(@80F/60%RH)	4.1 L/kW-hr (8.6pints/kW-hr)

TECHNICAL PARAMETERS


Supply Voltage	208~230V / 60Hz
Rated Power(@230V)	2.3 Kw
Rated Amps	9.5 A
Operating Temperature	41°F ~100°F
Air Volume @ 0.0" ,CFM	1600 CFM
Static Pressure	50~80 Pa
Compressor Cooling Capacity	34,110 BTU
Refrigerant Type	R410a
Net Dimensions	L55.1" * W31.5" * H28.2"
Net Weight	287 Lb
Throttling	Thermal Expansion Valve
3rd-party Port	Trolmaster HS-1 Port Ready

👍 FEATURES

- Engineered for high-performance grow room
- EDD System (EAST Directly Drive 0.02s start)
- Fast service maintaining
- Detachable Digital Control
- Sturdy Frame Structure replaces conventional flat panel structure
- Aluminum Alloy Non-woven Filter
- Third-party ready terminals

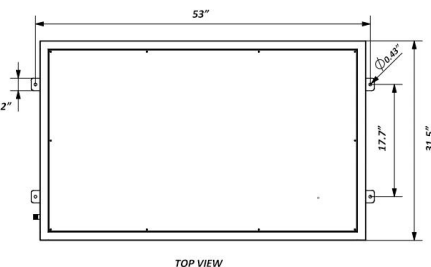

TOP VIEW

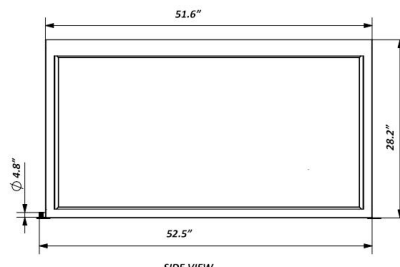

SIDE VIEW