

Air Curtain



Classical Cross Flow Air Curtain (remote)



Contracted Type Cross Flow Air Curtain



Classical Ultrathin Cross Flow Air Curtain



Super strong Steel Cross Flow Air Curtain (HERCULES)



Classical Electrical Heating Type Air Curtain



Luxury Aluminum Centrifugal Air Curtain

Split Air Conditioner



Split Wall Air Conditioner



Cassette Air Conditioner

Mobile Air Conditioner



7000BTU-9000BTU



9000BTU-12000BTU



9000BTU-12000BTU



12000BTU-14000BTU

Window Air Conditioner



7000BTU/9000BTU-12000BTU



18000BTU/12000BTU-18000BTU

Cold Storage Panel, Door and PVC Strip Curtain



Cold Storage Panel



PVC Strip Curtain



Hinged Door



Sliding Door

Latch and Hinge




CH-1178/1178S




CH-1200B



CH-1238S



CH-1470B



CH-1132



CH-1336B

Air Curtain



Classical Cross Flow Air Curtain (remote)

Mute, Big wind, a better performance.

Model	Size	Rated Voltage	Frequency	Input Power		Wind Speed(m/s)		Wind Volume(m³/h)		Noisy(dB)		Application Hight	Weight
	mm			High	Low	High	Low	High	Low	High	Low		
FM-1209GK	900×216×191	220	50	135	130	11.5	9.5	1700	1400	57	55	3.0	10.8
FM-1212GK	1200×216×191	220	50	165	160	11.5	9.5	2300	1900	58	56	3.0	14
FM-1215GK	1500×216×191	220	50	225	215	11.5	9.5	2900	2400	59	57	3.0	15.8
FM-1218GK	1800×216×191	220	50	300	290	11.5	9.5	3500	2900	60	58	3.0	18



Contracted Type Cross Flow Air Curtain

Model	Size	Rated Voltage	Frequency	Input Power		Wind Speed(m/s)		Wind Volume(m³/h)		Noisy(dB)		Application Hight	Weight
	mm			High	Low	High	Low	High	Low	High	Low		
FM-1109GK	900×155×200	220	50	115	105	11.0	9.5	1400	1050	60	58	3.0	6.5
FM-1112GK	1200×155×200	220	50	150	135	11.0	9.5	1900	1500	62	60	3.0	8.5
FM-1115GK	1500×155×200	220	50	175	165	11.0	9.5	2400	1900	64	62	3.0	10
FM-1118GK	1800×155×200	220	50	210	200	11.0	9.5	2900	2400	66	64	3.0	12



Classical Ultrathin Cross Flow Air Curtain

Contracted, structure more reasonable, the network hot style.

Model	Size	Rated Voltage	Frequency	Input Power		Wind Speed(m/s)		Wind Volume(m³/h)		Noisy(dB)		Application Hight	Weight
	mm			High	Low	High	Low	High	Low	High	Low		
FM-1109GKA	900×160×185	220	50	115	105	11.0	9.5	1400	1050	60	58	3.0	7.7
FM-1112GKA	1200×160×185	220	50	150	135	11.0	9.5	1900	1500	62	60	3.0	9.4
FM-1115GKA	1500×160×185	220	50	175	165	11.0	9.5	2400	1900	64	62	3.0	11.5
FM-1118GKA	1800×160×185	220	50	210	200	11.0	9.5	2900	2400	66	64	3.0	13.6
FM-1120GKA	2000×160×185	220	50	260	245	11.0	9.5	3300	2900	66	64	3.0	14.5

Air Curtain,
Air Conditioner,
Cold Storage



Super strong Steel Cross Flow Air Curtain (HERCULES)

Mute, Big wind, a better performance.

Model	Size	Rated Voltage		Frequency		Input Power			Wind Speed(m/s)		Wind Volume(m³/h)		Noisy(dB)		Application Hight	Weight
	mm	V		Hz		High	Low		High	Low	High	Low	High	Low	m	kg
FM-1509GK	900×261×235	220		50		250	240		14.5	12.5	2700	2400	60	58	4.0	15
FM-1512GK	1200×261×235	220		50		320	310		14.5	12.5	3700	3200	65	62	4.0	18.8
FM-1515GK	1500×261×235	220		50		390	380		14.5	12.5	4600	4000	68	65	4.0	24
FM-1518GK	1800×261×235	220		50		450	440		14.5	12.5	5500	4700	70	68	4.0	27



Classical Electrical Heating Type Air Curtain

Model	Size	Rated Voltage		Frequency		Input Power			Wind Speed(m/s)		Wind Volume(m³/h)		Noisy(dB)		Application Hight	Weight
	mm	V		Hz		Cold air	heating		High	Low	High	Low	High	Low	m	kg
RM-1209SY	900×216×191	380		50		92	8		8.0	7.0	1260	1070	55	52	3.0	12.5
RM-1212SY	1200×216×191	380		50		135	12		8.0	7.0	1800	1530	56	53	3.0	15
RM-1215SY	1500×216×191	380		50		155	16		8.0	7.0	2300	1950	58	55	3.0	18.5



Luxury Aluminum Centrifugal Air Curtain

Fuselage does not use screw.
Design, Simple and Beautiful.

Model	Size	Rated Voltage	Frequency	Input Power			Wind Speed (m/s)			Wind Volume (m³/h)		Noisy (dB)		Application Hight	Weight
	mm			High	Medium	Low	High	Medium	Low	High	Low	High	Low	m	kg
FM-3509LSY	900×235×210	220	50	303	288	270	18	16	13	1200	800	56	51	4.0	13.5
FM-3510LSY	1000×235×210	220	50	303	288	270	18	16	13	1200	800	56	51	4.0	13.5
FM-3512LSY	1200×235×210	220	50	405	380	355	18	16	13	1600	1200	58	52	4.0	16.5
FM-3515LSY	1500×235×210	220	50	418	398	382	18	16	13	2100	1500	60	54	4.0	22
FM-3518LSY	1800×235×210	220	50	620	573	523	18	16	13	2500	1800	60	58	4.0	29

Split Air Conditioner



Split Wall Air Conditioner

Model	KFR-95GW/IH090G	KFR-70GW/IH070F	KFR-25GW/IH009B	KFR-35GW/IH012A	KFR-50GW/IH050C
Work Mode	Inverter	Inverter	Inverter	Inverter	Inverter
Power Source	220-240V/50-60Hz	220-240V/50-60Hz	220-240V/50-60Hz	220-240V/50-60Hz	220-240V/50-60Hz
Horsepower (P)	4	3	1	1.5	2
Ton	3	2	0.8	1	1.5
Capacity (BTU)	36000 BTU	24000 BTU	9000 BTU	12000 BTU	18000 BTU
Cooling Capacity	9500W	7200W	2500W	3496W	5000W
Cooling Power Input	3500(600-4200)W	2600(350-3280)W	650(90-1450)W	980(95-1570)W	1570(160-2500)W
Heating Capacity	11500(1500-13400)W	9160(800-11000)W	3900(200-5000)W	4600(200-5700)W	633(750-8100)W
Heating Power Input	3760(600-4200)W	2950(300-4100)W	1070(90-1680)W	1300(90-1920)W	2100(200-2900)W
APF	3.32	3.46	4.26	4.27	3.66
Air Flow Volume (M3/4)	1560	1240	630	660	870
Indoor/Ourdoor Noise	28~39/49db(A)	20~38/47db(A)	18~36/40db(A)	18~36/40db(A)	40~36/46db(A)
Compressor	GMCC/LINDA	GMCC/LINDA	GMCC/LINDA	GMCC/LINDA	GMCC/LINDA
Refrigerants	R410A/R32	R410A/R32	R410A/R32	R410A/R32	R410A/R32
Pipe Diameter	9.52/15.88	6.35/15.88	6.35/9.52	6.35/9.52	6.35/12.7



Cassette Air Conditioner

Model	KFR-51GW/M	KFR-61GW/M	KFR-90GW/M	KFR-51GW/M	KFR-51GW/M
Power Source	220-240V/50-60Hz	220-240V/50-60Hz	220-240V/50-60Hz	220-240V/50-60Hz	220-240V/50-60Hz
Horsepower (P)	2	3	4	5	6
Ton	1.5	2	3	4	5
Capacity (BTU)	18000 BTU	24000 BTU	36000 BTU	48000 BTU	60000 BTU
Cooling Capacity	5099W	6096W	9096W	11650W	13650W
Cooling Power Input	1810W	2160W	3160W	3500W	3800W
Heating Capacity	5600W	6500W	9500W	12800W	13820W
Heating Power Input	1800W	2030W	3030W	3600W	3850W
Current input	8.6A	9.7A	11.7A	9.5A	12.5A
Air Flow Volume (M3/4)	750	950	1250	1860	2160
Rated Current Input	14A	14.7A	16.7A	12A	16A
Indoor/ Ourdoor Noise	39~45/55db(A)	42~46/55db(A)	42~46/55db(A)	48~53/58db(A)	48~53/58db(A)
Compressor	GMCC	GMCC	GMCC	Panasonic	Panasonic
Refrigerants	R410A/1500g	R410A/1650g	R410A/2250g	R410A/3180g	R410A/3580g

Refrigeration
Chemicals

Copper Tube

ACR Compressor

Heat Exchanger,
Condensing Unit,
Condenser, Evaporator

Refrigeration and Air
Conditioning Parts

ACR Service and
Maintenance Products

Fan and Motor

Air Curtain,
Air Conditioner,
Cold Storage

Mobile Air Conditioner



7000BTU-9000BTU

Technical Parameter	
Cooling Capacity	2.0KW
EE Class	A
EER	2.4
Mains Voltage	220-240V/50Hz/1hp
Power Consumption	750W
Current	3.1A
Sound Power Level	51db
Refrigeant Charge	R410A/250G



9000BTU-12000BTU

Technical Parameter	
Cooling Capacity	2.38KW
EE Class	A
EER	2.5
Mains Voltage	220-240V/50Hz/1hp
Power Consumption	900W
Current	3.5A
Sound Power Level	52db
Refrigeant Charge	R410A/340G



9000BTU-12000BTU

Technical Parameter	
Cooling Capacity	3.2KW
EE Class	A
EER	2.61
Mains Voltage	220-240V/50Hz/1hp
Power Consumption	1.25KW
Current	4.2A
Sound Power Level	53db
Refrigeant Charge	R410A/480G
Net Weight	27KG



12000BTU-14000BTU

Technical Parameter	
Cooling Capacity	4.1KW
EE Class	A
EER	2.61
Mains Voltage	220-240V/50Hz/1hp
Power Consumption	1.36KW
Current	4.4A
Sound Power Level	55db
Refrigeant Charge	R290/520G
Net Weight	28.5KG

Window Air Conditioner



7000BTU

Technical Parameter	
Size	36×30×41cm
Voltage	220V/50Hz
Refrigerant	R410A/420G
Net Weight	18KG
Cooling Power	619W
Cooling Capacity	1758W
Energy Efficiency Rating	Level 2
Control Mode	Remote control/ button type
Best Usable Area	8-10 square meters



9000BTU-12000BTU

Technical Parameter	
Size	48×35×51cm
Voltage	220V/50Hz
Refrigerant	R410A
Net Weight	30KG
Cooling Power	980W
Cooling Capacity	9000BTU
Energy Efficiency Rating	Level 2
Control Mode	Single cold remote control
Best Usable Area	12-16 square meters



18000BTU

Technical Parameter	
Size	64×44×66cm
Voltage	220V/50Hz
Refrigerant	R410A
Net Weight	48KG
Cooling Power	1900W
Cooling Capacity	18000BTU
Energy Efficiency Rating	Level 2
Control Mode	Single cold remote control
Best Usable Area	12-16 square meters



12000BTU-18000BTU

Technical Parameter	
Size	45×35×54cm
Voltage	220V/50Hz
Refrigerant	R410A
Net Weight	30KG
Cooling Power	1150W
Cooling Capacity	2800W
Energy Efficiency Rating	Level 2
Control Mode	Single cold remote control
Best Usable Area	12-16 square meters

Cold Storage Panel, Door and PVC Strip Curtain



Cold Storage Panel



ComforPlanet provides high quality panels for cold storage and food processing industries.

- Superior structural performance.
- Quick and easy installation.
- Minimal maintenance.

Polyurethane Layer Specification	
Density	40±2kg/m³
Heat conductivity	≤0.024 W/m²·k
Compressive strength	≥160Kpa
Thickness	50, 75, 100, 150 and 200mm

Panel Material Selection

Material	Characteristics	Applications	Thickness
Stainless steel	High corrosion and heat resistance, non-magnetic	Cold storage of seafood	0.5-1.5mm
PVF steel	Made by thin steel, surface composite light or inferior smooth PVC film	Seafood trunk or refrigerated container	0.6/0.8mm
Stucco embossed aluminum	Use mold to make the flat aluminum plate extrusion grain.	Kitchen	0.6/0.8mm
Painted galvanized steel	Hot galvanized or hot dip aluminum zinc plate as substrate, then coated lacquer.	Cold storage of hotel, logistics or warehousing	0.326-0.8mm
Galvanized steel	80-125 grams hot galvanizing on the surface plating layer.	Cold storage bedplate	0.5-1.5mm



PVC Strip Curtain

The PVC strip curtains are flexible, transparent suitable for installation in preservation (+0°C) and freezing (-20°C) cold storage.

Significant energy savings due to the reduction in massive temperature losses.

- Dimension: 200×2mm or 300×3mm in coil of 50m



Hinged door



Insert hinged door

Hinged Door

- Suitable for small cold rooms for preservation (+0°C) and freezing (-20°C)
- Quick, easy installation.
- High degree of insulation and energy efficiency.
- Ideal closure for doors in small refrigerated spaces.
- Available in a variety of finishes to meet the customer's requirements.



Sliding door




Automatims sliding door



Sliding Door

- The sliding doors are recommended for large cold rooms with high load traffic and large doors subject to intensive use.
- Time-saving, as the door allows faster handling of goods and optimal workflows.
- Perfect for the meat, fishing, fruit and vegetable, dairy and logistics industries.

Air Curtain,
Air Conditioner,
Cold Storage

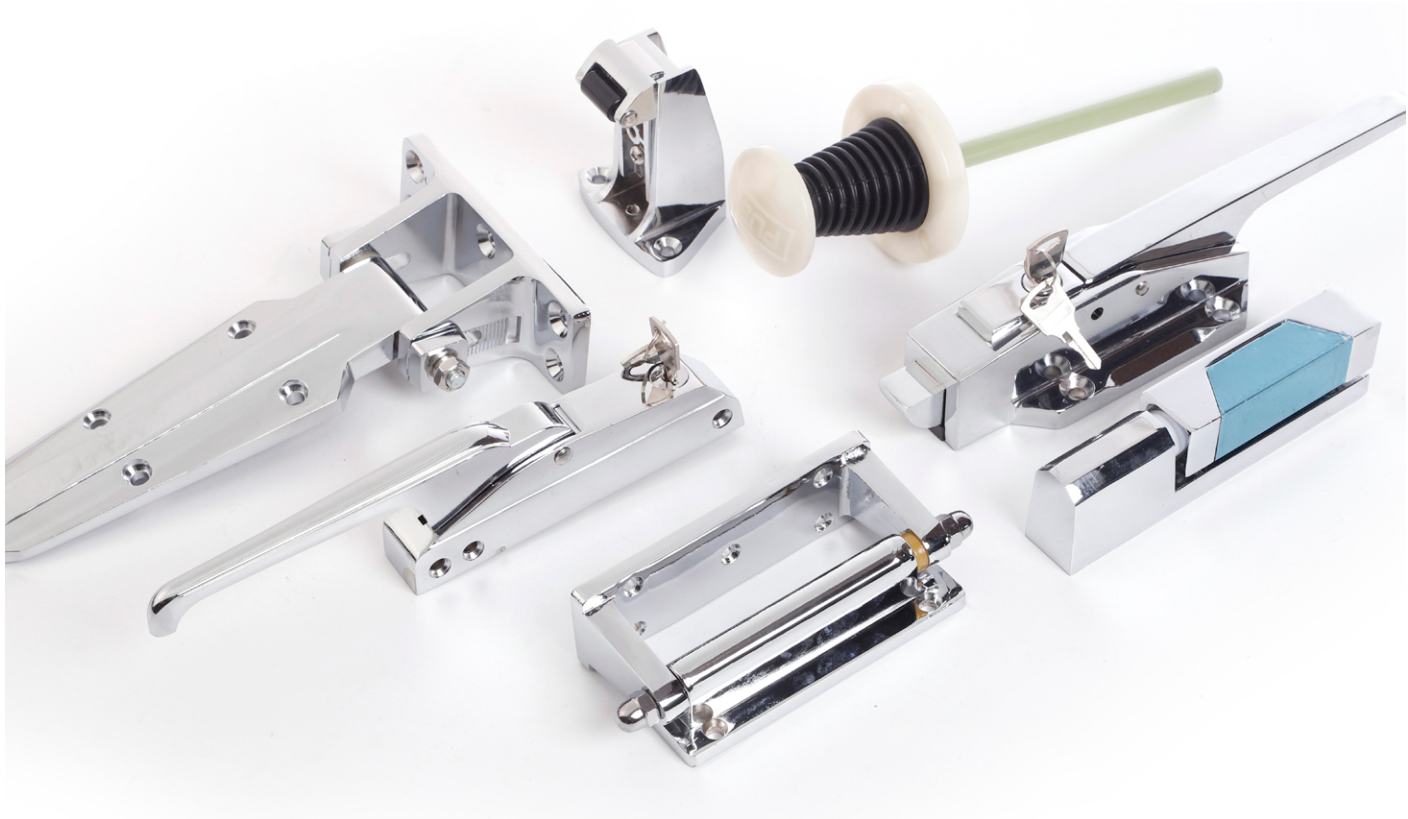


Latch and Hinge




CH-201

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-201	Looking	High strength 4-1 zinc	1.7	16




CH-1178/1178S

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1178	Cam-Lift Safety Latch	High strength 4-1 zinc	1.8	10
CH-1178S	Cam-Lift Safety Latch	High strength 4-1 zinc	1.7	10




CH-1200A

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1200A	Edgemount Mechanical Latch	High strength 4-1 zinc	0.52	40




CH-1200B

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1200B	Edgemount Mechanical Latch	High strength 4-1 zinc	0.6	35





CH-1250

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1250	Edgemount Mechanical Latch	High strength 4-1 zinc	0.52	40




CH-3-0680

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-3-0680	Edgemount Mechanical Latch	High strength 4-1 zinc	0.42	50




CH-1100

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1100	Edgemount Mechanical Latch	High strength 4-1 zinc	0.5	40




CH-3-0681

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-3-0681	Edgemount Mechanical Latch	High strength 4-1 zinc	0.44	40




CH-202

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-202	Reversible Reach-in Plane Hinge	High strength 4-1 zinc	1.8	14




CH-1230

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1230	Reversible Reach-in Plane Hinge	High strength 4-1 zinc	1.35	12 20



CH-1230S

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1230S	Reversible Reach-in Plane Hinge	High strength 4-1 zinc	1.35	12 20



CH-1238

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1238	Reversible Reach-in Cam-lift Hinge	High strength 4-1 zinc	1.25	12 20

Refrigeration
Chemicals

Copper Tube

ACR Compressor


Heat Exchanger,
Condensing Unit,
Condenser, Evaporator

Refrigeration and Air
Conditioning Parts

ACR Service and
Maintenance Products


Fan and Motor

Air Curtain,
Air Conditioner,
Cold Storage





CH-1238S

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1238S	Reversible Reach-in Cam-lift Hinge	High strength 4-1 zinc	1.25	12 20




CH-1450

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1450	Adjustable Door Hinges	High strength 4-1 zinc	0.85	24





CH-1460

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1460	Adjustable Door Hinges	High strength 4-1 zinc	0.9	24





CH-1470

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1470	Adjustable Door Hinges	High strength 4-1 zinc	1.3	12





CH-1470B

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1470B	Adjustable Door Hinges	High strength 4-1 zinc	0.95	12





CH-1132

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1132	Reversible Reach-In Edgemount Cam-lift Hinge	High strength 4-1 zinc	0.5	50




CH-1332

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1332	Surface Mount Hinge	High strength 4-1 zinc	0.17	100



CH-1336

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1336	Surface Mount Hinge	High strength 4-1 zinc	0.21	100



CH-1336B

Model	Name	Material	Weight(Kg)	Packing No. (Sets)
CH-1336B	Surface Mount Hinge	High strength 4-1 zinc	0.145	100



ZENGO International Ltd.



D4-109 Liangzhu Cultural Town, Haishu District,
315175 Ningbo, CHINA



+86 574 8907 9909



+86 574 8907 9905



sales@zengo.com.cn yaufon@zengo.com.cn



www.comforplanet.com www.zengo.com.cn



www.zengo.en.alibaba.com



yaufon



+86 137 7712 6235

Find Us On:

