

HC-CE100-ACC3M-12V

10 MP 1/2.3" CMOS GigE Area Scan Camera



GEN*i*CAM

GigE
VISION

Introduction

HC-CE100-ACC3M-12V camera (included power IO cable, power adapter 12VDC, GigE cable) is a high quality device that can be used in a variety of applications, including electronic semiconductor fabrication, factory automation, quality inspection.

Key Feature

- Adopts GigE interface and max. transmission distance of 100 meters without relay.
- Up to 128 MB local memory for burst transmission and retransmission.
- Supports auto exposure control, LUT, Gamma correction, etc.
- Supports hardware trigger, software trigger, etc.
- Compatible with GigE Vision V1.2 Protocol, GenICam Standard, and third-party software based on the protocol and standard.


Available Model

- Mono camera: HC-CE100-ACC3M-12V
- Color camera: HC-CE100-ACC3C-12V

Applicable Industry


Electronic semiconductor, factory automation, quality inspection, etc.

Sensor Quantum Efficiency



HC-CE100-ACC3M-12V

Dimension

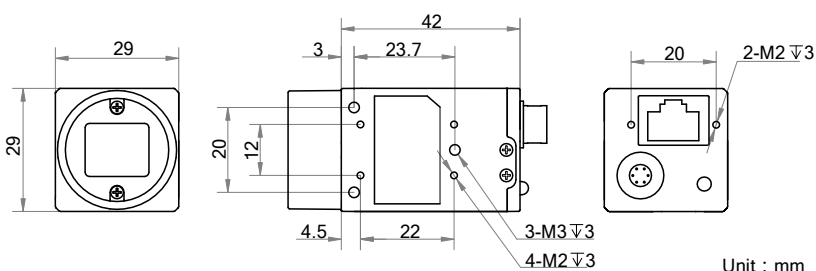

Specification

Model	HC-CE100-ACC3M-12V	HC-CE100-ACC3C-12V
Camera		
Sensor type	CMOS, rolling shutter	
Sensor model	MT9J003	
Pixel size	1.67 μm × 1.67 μm	
Sensor size	1/2.3"	
Resolution	3840 × 2748	
Max. frame rate	7 fps @3840 × 2748	
Dynamic range	65 dB	
SNR	34 dB	
Gain	0 dB to 15.3 dB	
Exposure time	50 μs to 2 s	
Exposure mode	Off/Once/Continuous exposure mode	
Mono/color	Mono	Color
Pixel format	Mono 8/10/10p/12/12p	Mono 8/10/12, Bayer GR 8/10/10p/12/12p YUV422Packed , YUV422_YUYV_Packed, RGB 8
Binning	Supports 1 × 1, 2 × 2	
Decimation	Not support	
Reverse image	Supports horizontal reverse image output	
Image buffer	128 MB	
Electrical features		
Data interface	Gigabit Ethernet	
Digital I/O	6-pin Hirose connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2).	
Power supply	12 VDC, supports PoE	
Power consumption	Typ. 2.6 W@12 VDC	
Structure		
Lens mount	C-Mount	
Dimension	29 mm × 29 mm × 42 mm (1.1" × 1.1" × 1.7")	
Weight	Approx. 68 g (0.15 lb.)	
Ingress protection	IP30 (under proper lens installation and wiring)	
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)	
Humidity	20% to 80% RH, non-condensing	
General		
Client software	MVS or third-party software meeting with GigE Vision Protocol	
Operating system	32/64-bit Windows XP/7/10, 32/64-bit Linux and 64-bit MacOS	
Compatibility	GigE Vision V1.2, GenICam	
Certification	CE, FCC, RoHS, KC	