

HC-CA032-10GM/GC

3.2 MP 1/1.8" CMOS GigE Area Scan Camera



GEN*i*CAM

GigE
VISION

Introduction

HC-CA032-10GM/GC camera adopts Sony IMX265 sensor to provide high-quality image. It uses GigE interface to transmit non-compressed images in real time with max. frame rate reaching 37.5 fps.

Key Feature

- Adopts GigE interface and max. transmission distance of 100 meters without relay.
- Supports auto and manual adjustment for exposure control, LUT, Gamma correction, etc.
- Up to 128 MB local memory for burst transmission and retransmission.
- Supports hardware trigger, software trigger, etc.
- Compatible with GigE Vision Protocol V2.0, GenICam Standard, and third-party software based on these protocol and standard.


Available Model

- Mono camera: HC-CA032-10GM
- Color camera: HC-CA032-10GC


Applicable Industry

Electronic semiconductor, factory automation, food and beverage, medical packaging, etc.

Sensor Quantum Efficiency




HC-CA032-10GM



HC-CA032-10GC

Dimension

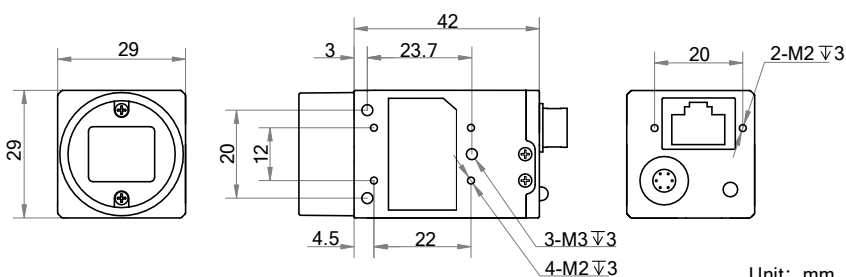

Unit: mm

Specification

Model	HC-CA032-10GM		HC-CA032-10GC
Camera			
Sensor type	CMOS, global shutter		
Sensor model	Sony IMX265		
Pixel size	3.45 μm x 3.45 μm		
Sensor size	1/1.8"		
Resolution	2048 × 1536		
Max. frame rate	37.5 fps @2048 × 1536		
Dynamic range	73 dB		
SNR	40 dB		
Gain	0 dB to 20 dB		
Exposure time	UltraShort exposure mode: 1 μs to 14 μs		
	Standard exposure mode: 15 μs to 10 sec		
Exposure mode	Off/Once/Continuous exposure mode		
Mono/color	Mono	Color	
Pixel format	Mono 8/10/10p/12/12p	Mono 8/10/12, Bayer RG 8/10/10p/12/12p, YUV422Packed, YUV422_YUYV_Packed, RGB 8, BGR 8	
Binning	Supports 1 × 1, 1 × 2, 2 × 1, 1 × 4, 4 × 1, 2 × 2, 2 × 4, 4 × 2, 4 × 4		
Decimation	Supports 1 × 1, 1 × 2, 2 × 1, 2 × 2		
Reverse image	Supports horizontal and vertical reverse image output		
Image buffer	128 MB		
Electrical feature			
Data interface	Gigabit Ethernet, compatible with Fast Ethernet		
Digital I/O	6-pin Hirose connector provides power and I/O, including opto-isolated input x 1 (Line0), opto-isolated output x 1(Line1), and bi-directional non-isolated I/O x 1 (Line2)		
Power supply	12 VDC, supports PoE		
Power consumption	Typ. 3.2 W@12 VDC	Typ. 3.5 W@12 VDC	
Mechanical			
Lens mount	C-Mount		
Dimension	29 mm × 29 mm × 42 mm (1.1" × 1.1" × 1.7")		
Weight	Approx. 68 g (0.15 lb.)		
Ingress protection	IP30 (under proper lens installation and wiring)		
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)		
Humidity	20% to 80% RH, non-condensing		
General			
Client software	MVS or third-party software meeting with GigE Vision Protocol		
Operating system	32/64-bit Windows XP/7/10, 32/64-bit Linux and 64-bit MacOS		
Compatibility	GigE Vision V2.0, GenICam		
Certification	CE, FCC, RoHS, KC		