




A

解像力验收标准			
Frequency	Axis	0.5F	0.7F
30LP/mm	≧0.8	≧0.5	≧0.5
60LP/mm	≧0.5	≧0.25	≧0.25

B

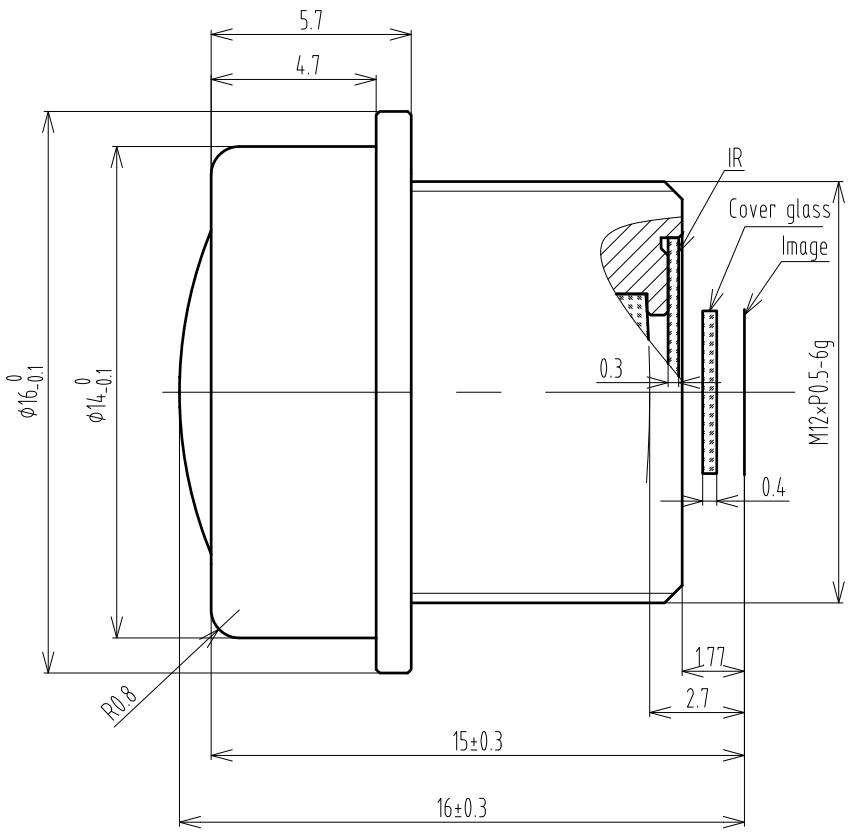

A

B

Main Specification		
Sensor	1/4	
Max image	φ4.7	
F/#	1.8±5%	
EFL	1.6	
FOV(°) (1/4 Sensor)	D(Y=4.48)	160°±5°
	H(Y=3.58)	130°±5°
	V(Y=2.69)	96°±5°
FFL(IR cut(t=0.3)in + Cover glass(t=0.4)in)		1.77±0.2
BFL(IR cut(t=0.3)in + Cover glass(t=0.4)in)		2.7±0.2
TTL	16±0.3	
Optical Distortion	<76%(D)	
Structure	6G	
Resolution	1M	
Water-Repellent Function	IP67	
SURFACE QUALITY		
Center	80-50	
Margin	80-50	

C

D

E

F



					TOLERANCE: LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES AREA±0.5°/SIDE		三角法		材料(环保)		单位	比例
											mm	5:1
					设计	CHP	2015-06-02	名称	CV0125A LENS		页码	
					校对						1/1	
					审核			代号	CV0125A SPEC		版本	
版本	处数	更改文件号	担当	变更日期	批准						V0	

D

E

F