

# SC3004M

## 0.4 MP 1/2.9" Vision Sensor



### Introduction

With built-in positioning and measurement algorithms, SC3004M vision sensor can detect object's existence, position, dimension, etc. It can be monitored and operated via the SCMVS client. It can output results via RS-232 and Ethernet, and cooperate with other processes via IO. The vision sensor supports multiple result output methods and customized result text output.

### Key Features

- Adopts embedded hardware platform for high-speed image processing.
- Adopts built-in positioning and measurement algorithms to detect object's existence, position, dimension, etc.
- Multiple IO interfaces for input and output signals.
- Multiple indicators for displaying device status.
- Adopts light source to ensure uniform brightness in the illuminated area.
- Supports multiple communication protocols, including Serial Port, TCP Client, TCP Server, Profinet, Modbus, etc.


### Available Model

- 6 mm focal length: SC3004M-06M-WBN
- 12.4 mm focal length: SC3004M-12M-WBN
- 14.8 mm focal length: SC3004M-15M-WBN

### Applicable Industry

Consumer electronics, food and medical industry, automobile, etc.

### Dimension

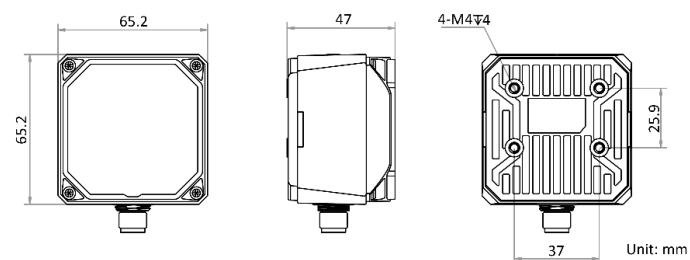

Unit: mm

# Specification

Model	SC3004M-06M-WBN	SC3004M-12M-WBN	SC3004M-15M-WBN
<b>Tool</b>			
<b>Vision tool</b>	<ul style="list-style-type: none"> <li>● Existence: Pattern existence, spot existence, edge existence, circle existence, line existence</li> <li>● Count: Pattern count, spot count, edge count</li> <li>● Measurement: Brightness analysis, contrast measurement, greyscale size, diameter measurement, width measurement, line angle, line to line angle, point to line measurement</li> <li>● Recognition: OCR, barcode recognition</li> </ul>		
<b>Solution capacity*</b>	Supports solution importing and exporting, up to 32 solutions and 40 modules can be stored.		
<b>Communication protocol</b>	Serial Port, TCP Client, TCP Server, UDP Server, FTP, Profinet, Modbus, Ethernet/IP		
<b>Camera</b>			
<b>Sensor type</b>	CMOS, global shutter		
<b>Pixel size</b>	6.9 μm × 6.9 μm		
<b>Sensor size</b>	1/2.9"		
<b>Resolution</b>	704 × 540		
<b>Max. frame rate</b>	100 fps		
<b>Dynamic range</b>	74 dB		
<b>SNR</b>	41 dB		
<b>Gain</b>	0 dB to 15 dB		
<b>Exposure time</b>	16 μs to 1 sec		
<b>Pixel format</b>	Mono 8		
<b>Mono/color</b>	Mono		
<b>Electrical features</b>			
<b>Data interface</b>	17-pin M12 connector provides power, Ethernet, digital I/O, and serial port		
<b>Ethernet</b>	Fast Ethernet		
<b>Digital I/O</b>	Input signal × 2 (Line 0/1), output signal × 3 (Line 5/6/7), bi-directional I/O × 3 (Line 2/3/4), and external button input × 1. Output signal can be set as NPN or PNP		
<b>Power supply</b>	24 VDC		
<b>Max. power consumption</b>	Approx. 48 W@24 VDC		
<b>Mechanical</b>			
<b>Lens mount</b>	M12-mount, mechanical autofocus lens		
<b>Focal length</b>	6 mm (0.2")	12.4 mm (0.5")	14.8 mm (0.6")
<b>Lens cap</b>	Transparent lens cap. Polarization or infrared filter lens cap is optional.		
<b>Light source</b>	White light by default. Red/blue/near-infrared is optional.		
<b>Indicator</b>	Power indicator (PWR), network indicator (LNK), status indicator (STS), result indicator (OK/NG)		
<b>Dimension</b>	65.2 mm × 65.2 mm × 47 mm (2.6" × 2.6" × 1.9")		
<b>Weight</b>	Approx. 280 g (0.6 lb.)		
<b>Ingress protection</b>	IP67 (under proper installation of lens and wiring)		
<b>Temperature</b>	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)		
<b>Humidity</b>	20% to 95% RH, non-condensing		
<b>General</b>			
<b>Client software</b>	SCMVS		
<b>Certification</b>	CE, FCC, KC		

\*Single solution supports up to 8 pattern count modules, or 8 existence modules.

## Detection Range

Lens focal length	Installation distance	Field of view	Single pixel accuracy
6 mm (0.2")	5 mm (0.2")	4.05 mm × 3.11 mm (0.2" × 0.1")	0.006 mm
	2000 mm (78.7")	1619.20 mm × 1242 mm (63.7" × 48.9")	2.300 mm
12.4 mm (0.5")	70 mm (2.8")	27.42 mm × 21.03 mm (1.1" × 0.8")	0.039 mm
	2000 mm (78.7")	783.48 mm × 600.97 mm (30.8" × 23.7")	1.113 mm
14.8 mm (0.6")	80 mm (3.1")	26.26 mm × 20.14 mm (1.0" × 0.8")	0.037 mm
	2000 mm (78.7")	656.43 mm × 503.51 mm (25.8" × 19.8")	0.932 mm

