

On-time Delivery

- 1,100,000 units (annual production capacity)

Continuous Innovation

- Over 20 professional engineers
- Over 3% continuous investment per year

Reliable Quality

- 7 Inspection positions
- National standard testing lab

Professional Logistics

- Export to over 49 countries
- 500 containers delivery per year



Pakistan
Gas Water Heater
Series Catalog

Greaidea Gas and Electrical Appliances Co.,Ltd

Address: Building A, Shuntai Industry Park, No.2 Huajin Street,
Nantou town, Zhongshan city, GD, China.

Web: www.greaidea.com / www.cehob.com

Email: info@greaidea.com




20+ Years Experience Your First Choice



About us/ Certificate

We developed the overseas market since 2000, exported our gas water heater more than 49 overseas countries. Moreover, we ranked the leading position in some overseas market for many years. In 2013, we increased the business development of our China domestic market and cooperated with many top brands in China. In November 2018, Greaidea invested around 1.2 million U.S. Dollars to upgrade hardware systems such as testing laboratories and assembly facilities. We are always focusing on customers' value, re-combining the recruitment of high talented human resource, keeping upgrading with the first-class manufacture facilities, under such great improvement, which definitely can support the long-term development of "Greaidea".

With abundant human, finance & material resource, we always pay great attention to the quality of products and dedicate all efforts to develop the new technology with creative idea, gradually to improve our reputation among competitors. With the support of comprehensive & precise testing equipment in each assembly line, as well as the mature quality control system, we have gained high reputation from honored customers both in domestic and overseas market.

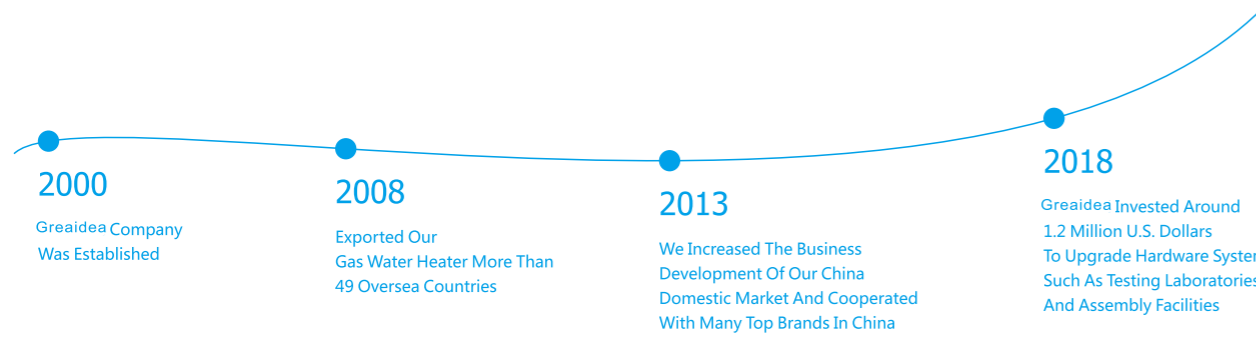

Vision: BEYOND YOUR IMAGINATION!

CULTURAL PRINCIPLE OF Greaidea

- ▶ Mutual Creation: Innovate new products with customers Introduce new management & technology with key suppliers
- ▶ Mutual Sharing: Knowledge sharing, skills sharing, experience sharing and happiness sharing
- ▶ Win-Win: Realize the Win-Win situation with our customer, our employees and social public





Production Team

- ▶ Production Line—30,000PCS monthly production capability
- ▶ We follow the 5S factory management system
- ▶ 3 automatic assembly lines & 3 automatic packing machines



Quality Control

- ▶ Integrated Testing Lab Overview
- ▶ Comprehensive Testing Room
- ▶ Key Parts Performance Testing Room
- ▶ Environment And Packing Testing Room
- ▶ Individual Water And Gas Supply Base



Integrated Testing Lab



Life Testing Equipment



Key Parts Performance Testing Room



Water Heater Integrated Automatic Testing Equipment



Burner, Heat Exchanger And Gas Valve Testing Equipment



Integrated Testing Lab




Integrated Testing Lab

Endless Hot Water
On Demand



JSD-D15A(6L-20L)

White Panel
Classical Design

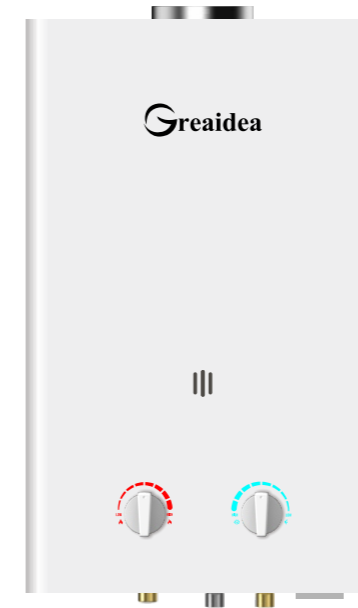

JSD-W1(6L-20L)



JSD-W2(6L-20L)



JSD-W3(6L-20L)

- Exhaust Way: Flue Type/Force Exhaust Type
- Ignition Mode: Automatic Electrical Pulse Igniton
- Gas Type: LPG 2800PA; Natural Gas 1300PA/2000PA
- Rated Voltage: Battery Power With 3V
- Rated Water Pressure: 0.01-0.8MPA
- Panel Material: White Powder Painting/Silver Metalic Painting
- Heating Status: Heating Time≤15 Seconds; Over Temperature≤2°C; Stability Time≤15 Seconds
- Connection Pipe Specs: Water Inlet: G1/2" Pipe; Water Outlet:G1/2" Pipe; Gas Input: G1/2" Pipe




Rated Water Output($\Delta t=25^{\circ}\text{C}$)L/Min	6L/min	7L/min	8L/min	10L/min
Rated Thermal Load	12KW	14KW	16KW	20KW
Product Size(MM)	440x300x120	490x310x140	520x310x140	550x330x180
Package Size(MM)	540x350x170	600x360x190	640x370x200	670x380x235
Loading Qty.(PCS)20FT/40FT/40HQ	880/1780/2050	685/1390/1620	600/1220/1420	455/950/1120

Rated Water Output($\Delta t=25^{\circ}\text{C}$)L/Min	12L/min	14L/min	16L/min	20L/min
Rated Thermal Load	24KW	28KW	32KW	40KW
Product Size(MM)	590x340x140	610x350x180	650x420x185	730x430x180
Package Size(MM)	705x390x200	725x400x240	750x470x235	880x470x250
Loading Qty.(PCS)20FT/40FT/40HQ	520/1060/1220	540/830/970	340/700/810	270/550/640

Water Heater


Colorful Panel Unique Design

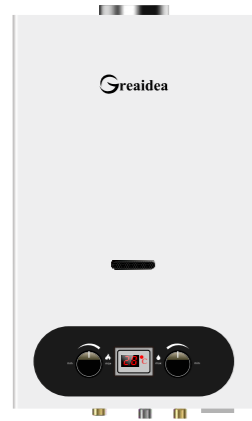

JSD-D1(6L-20L)



JSD-D2(6L-20L)

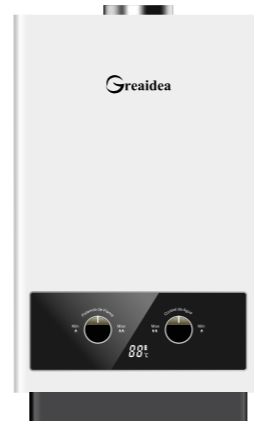

JSD-D3(6L-20L)



JSD-D4(6L-20L)



JSD-D5(6L-20L)



JSD-D6(6L-20L)


- Exhaust Way: Flue Type/Force Exhaust Type
- Ignition Mode: Automatic Electrical Pulse Igniton
- Gas Type: LPG 2800PA; Natural Gas 1300PA/2000PA
- Rated Voltage: Battery Power With 3V
- Rated Water Pressure: 0.01~0.8MPA
- Panel Material: White Powder Painting/Silver Metallic Painting
- Heating Status: Heating Time≤15 Seconds; Over Temperature≤2°C; Stability Time≤15 Seconds
- Connection Pipe Specs: Water Inlet: G1/2" Pipe; Water Outlet:G1/2" Pipe; Gas Input: G1/2" Pipe



Rated Water Output($\Delta t=25^{\circ}\text{C}$)L/Min	6L/min	7L/min	8L/min	10L/min
Rated Thermal Load	12KW	14KW	16KW	20KW
Product Size(MM)	440x300x120	490x310x140	520x310x140	550x330x180
Package Size(MM)	540x350x170	600x360x190	640x370x200	670x380x235
Loading Qty.(PCS)20FT/40FT/40HQ	880/1780/2050	685/1390/1620	600/1220/1420	455/950/1120
Rated Water Output($\Delta t=25^{\circ}\text{C}$)L/Min	12L/min	14L/min	16L/min	20L/min
Rated Thermal Load	24KW	28KW	32KW	40KW
Product Size(MM)	590x340x140	610x350x180	650x420x185	730x430x180
Package Size(MM)	705x390x200	725x400x240	750x470x235	880x470x250
Loading Qty.(PCS)20FT/40FT/40HQ	520/1060/1220	540/830/970	340/700/810	270/550/640

Water Heater

Unique Design

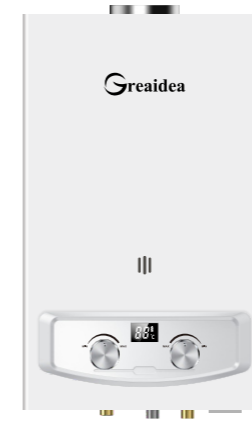


JSD-D7(6L-20L)



JSD-D8(6L-20L)



JSD-D9(6L-20L)

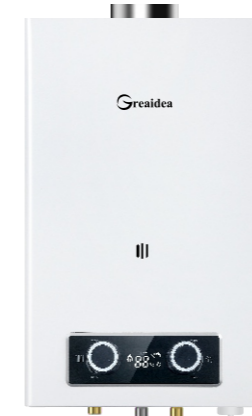

JSD-D10(6L-20L)



JSD-D11(6L-20L)



JSD-D12(6L-20L)

- Exhaust Way: Flue Type/Force Exhaust Type
- Ignition Mode: Automatic Electrical Pulse Igniton
- Gas Type: LPG 2800PA; Natural Gas 1300PA/2000PA
- Rated Voltage: Battery Power With 3V
- Rated Water Pressure: 0.01~0.8MPA
- Panel Material: White Powder Painting/Silver Metallic Painting
- Heating Status: Heating Time≤15 Seconds; Over Temperature≤2°C; Stability Time≤15 Seconds
- Connection Pipe Specs: Water Inlet: G1/2" Pipe; Water Outlet:G1/2" Pipe; Gas Input: G1/2" Pipe



Rated Water Output($\Delta t=25^{\circ}\text{C}$)L/Min	6L/min	7L/min	8L/min	10L/min
Rated Thermal Load	12KW	14KW	16KW	20KW
Product Size(MM)	440x300x120	490x310x140	520x310x140	550x330x180
Package Size(MM)	540x350x170	600x360x190	640x370x200	670x380x235
Loading Qty.(PCS)20FT/40FT/40HQ	880/1780/2050	685/1390/1620	600/1220/1420	455/950/1120
Rated Water Output($\Delta t=25^{\circ}\text{C}$)L/Min	12L/min	14L/min	16L/min	20L/min
Rated Thermal Load	24KW	28KW	32KW	40KW
Product Size(MM)	590x340x140	610x350x180	650x420x185	730x430x180
Package Size(MM)	705x390x200	725x400x240	750x470x235	880x470x250
Loading Qty.(PCS)20FT/40FT/40HQ	520/1060/1220	540/830/970	340/700/810	270/550/640

SILENT SERIES



Silent Combustion



Durable Burner



Anti-Scald Bypass Pipeline




White LED

Water Heater

Constant Temperature Type



JSD-T01(12L)

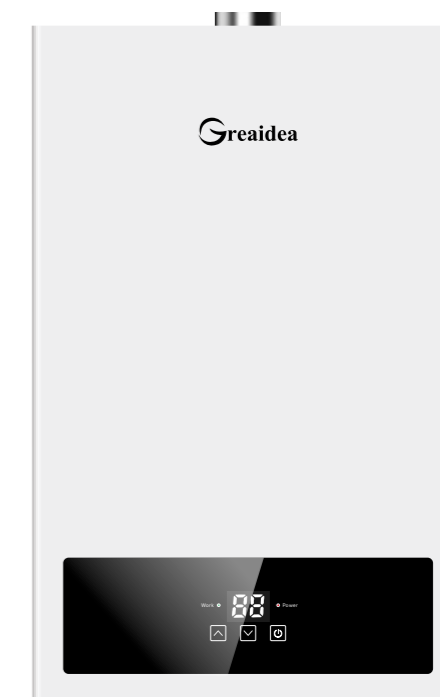

JSD-T01A(12L)

- Exhaust Way: Forced Exhaust Type
- Diameter of Smoke Exhaust: Φ60MM
- Ignition Mode: Automatic Electrical Pulse Igniton
- Gas Type: LPG/Natural Gas
- Rated Voltage: AC 220V/50HZ & AC 110V/60HZ
- Rated Water Pressure: 0.01~0.8MPA
- Panel Color: White / Grey
- Connection Pipe Specs: Water Inlet: G1/2" Pipe; Water Outlet: G1/2" Pipe; Gas Input: G1/2: Pipe



Rated Water Output($\Delta t=25^{\circ}\text{C}$)L/Min	12L/min
Rated Thermal Load	24KW
Product Size(MM)	560x350x140
Package Size(MM)	685x405x215
Loading Qty.(PCS)20FT/40FT/40HQ	380/760/900

Remark: Unit and its Pipe packed separately.