


# NGA Plastic Sand Filter Top Mount

## Working Condition

- Max Working Pressure:200kpa/28psi/2.0bar
  - Factory Testing Pressure:300kpa/44psi/3.0bar
  - Max Water Temp:40°C(104°F)
  - Size Of Silica Sand:0.5-0.8mm
  - Max Filtration Velocity:50m³/h/m²
- Color can be customized

## Features

- Compact and light weight
- Designed for most swimming pools or SPA pools
- Clamp lock is designed to allow 360 degree rotation to simplify installation
- Easy-to-use multiport valve lets you select any of the valve/filter operation with a simple lever-action

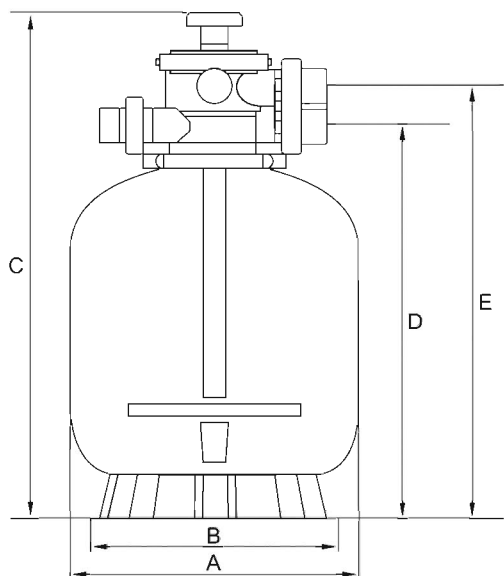

## Performance Table

Model No.	A		B		C		D		E		Filter Area [m <sup>2</sup> ]	Valve Connections		Max Flow Rate		Sand [KG]
	mm	in	mm	in	mm	in	mm	in	mm	in						
NGA2501	360	14.2	340	13.4	730	28.7	550	21.7	619	24.4	0.1	1.5inch	50mm	72LPM	4.32m³/h	20
NGA2502	400	15.7	340	13.4	810	31.9	590	23.2	640	25.2	0.13	1.5inch	50mm	102LPM	6.12m³/h	35
NGA2503	460	18.1	420	16.5	840	33.1	638	25.1	698	27.5	0.16	1.5inch	50mm	130LPM	7.8m³/h	45
NGA2504	510	20.1	420	16.5	860	33.9	670	26.4	730	28.7	0.22	1.5inch	50mm	180LPM	10.8m³/h	85
NGA2505	620	24.4	480	18.9	1075	42.3	900	35.4	960	37.8	0.31	1.5inch	50mm	255LPM	15.3m³/h	145