


NGC Plastic Sand Filter Side Mount

Working Condition

- Max Working Pressure: 200kpa/28psi/2.0bar
 - Factory Testing Pressure: 300kpa/44psi/3.0bar
 - Max Water Temp: 40°C(104°F)
 - Size Of Silica Sand: 0.5-0.8mm
 - Max Filtration Velocity: 50m³/h/m²
- Color can be customized

Features

- Transparent lid cover allows easy inspection of the sand bed
- Top diffuser ensures even distribution of water over the top of the sand bed
- Air relief enables easy release of trapped air during operation of the filter
- Easy-to-use multiport valve lets you select any of the valve/filter operation with a simple lever-action

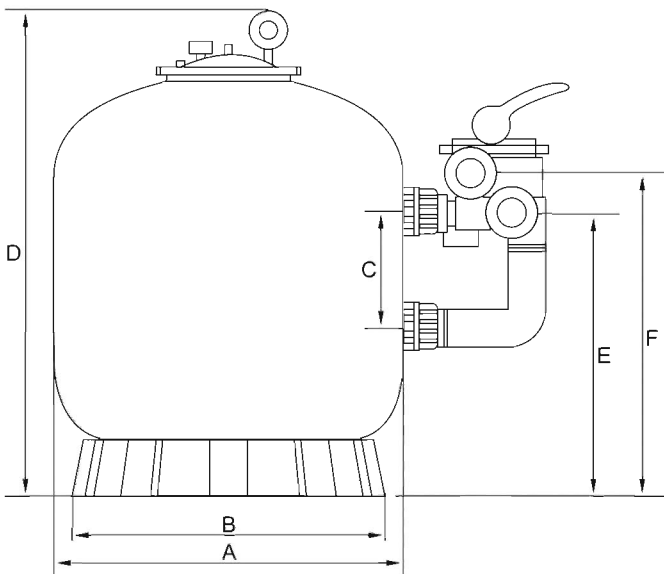

Performance Table

Model No.	A		B		C		D		E		F		Filter Area [m ²]	Valve Connections	Max Flow Rate	Sand [KG]
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in				
NGC2506	460	18.1	420	16.5	180	7.1	660	26	440	17.3	500	19.6	0.16	1.5inch 50mm	130LPM 7.8m ³ /h	45
NGC2507	510	20.1	420	16.5	180	7.1	700	27.6	460	18.1	520	19.6	0.22	1.5inch 50mm	180LPM 10.8m ³ /h	85
NGC2508	620	24.4	480	18.9	180	7.1	940	37	510	20.1	570	22.4	0.31	1.5inch 50mm	255LPM 15.3m ³ /h	145