

# General Catalog Pipe Tools

2022



# Dedicated to pipe tools

## Pressure Testing Pump

### Manual testing Pump

#### **Product features**

The hand pressure test pump is usd for testing of leaks in installations, especially for use in heating, compressed air, refrigeration systems, oil installations, sprinkler systems and other small bore pipe applications. Robust precision testing pump for pressure testing of water lines and containers up to 60 bar. Tank with Cold-resistant coating ensure an extremely long service life.



HSY30-5





HSY30-5S

| Catalog<br>No. | Model<br>No. | Testing range            | Tank<br>capacity |          | Volume<br>stroke |           | Water tank      | Weight<br>(Kg) | Packing size<br>(cm) |
|----------------|--------------|--------------------------|------------------|----------|------------------|-----------|-----------------|----------------|----------------------|
| 770020         | HSY30-5      | 0-60 bar( 860 psi,6 MPa) | 12L              | aluminum | ≈45 ml           | 1/2" BSPP | steel           | 7.5            | 52*18*31             |
| 770021         | HSY30-5      | 0-60 bar( 860 psi,6 MPa) | 12L              | brass    | ≈45 ml           | 1/2" BSPP | steel           | 7.5            | 52*18*31             |
| 770022         | HSY30-5S     | 0-60 bar( 860 psi,6 MPa) | 12L              | aluminum | ≈45 ml           | 1/2" BSPP | Stainless steel | 8              | 52*18*31             |
| 770023         | HSY30-5S     | 0-60 bar( 860 psi,6 MPa) | 12L              | brass    | ≈45 ml           | 1/2" BSPP | Stainless steel | 8              | 52*18*31             |



### Manual testing Pump

#### Product features

RP50S test pump in light wight and compact design. Easy to carry. Will be your good tool to test in confined spaces. Reliable and precise measurement results: Test pump with double valve system (twin valve) allows self-testing of the pump, as well as a precise fine adjustment of the pressure.

Test Pump with steel mesh hose. No measuring errors which will be caused by expansion of the hose.

Robust precision testing pump for pressure testing of water lines and containers up to 60 bar.

A drag indicators displays the preset pressure so that a loss of pressure in the system can be detected easier. Tank with Cold-resistant coating ensure an extremely long service life.





|    | talog<br>No. | Model<br>No. | Testing range            | Tank capacity | Volume/stroke | Connections | Water tank | Weight<br>(Kg) | Packing size<br>(cm) |
|----|--------------|--------------|--------------------------|---------------|---------------|-------------|------------|----------------|----------------------|
| 77 | 0010         | RP50S        | 0-60 bar( 860 psi,6 MPa) | 12L           | ≈45 ml        | 1/2" BSPP   | steel      | 8.2            | 52*18*31             |
| 77 | 0011         | RP50         | 0-60 bar( 860 psi,6 MPa) | 12L           | ≈45 ml        | 1/2" BSPP   | steel      | 8              | 52*18*31             |



## Pipe Testing Pump

### Electric testing Pump

#### **Product features**

Suitable for water or hydraulic oil as medium, for all kinds of pressure vessel, pipe, valves, pressure test, etc. Also used for the hydraulic energy, provide the required pressure, suitable for chemical industry, building, water, oil, coal, metallurgy, shipbuilding and other industries.

With compact reasonable structure, the test pump is easy to operate, and light weight for carry.

- •Simple structure in linear type ,easy in installation and maintenance.
- •Adopting advanced world famous brand components in pneumatic parts ,electric parts and operation parts.
- High pressure double crank to control the die opening and closing.
- •Running in a high automatization and Intelligent ,no pollution.
- Apply a linker to connect with the air conveyor ,which can directly inline with filling machine .



WP-390E




WP-390ES

WP-1800E

| Catalog<br>No. | Model<br>No. | Testing range             | Power<br>supply | Tank capacity | Water flow | Connections | Water tank      | Weight<br>(Kg) | Packing size<br>(cm) |
|----------------|--------------|---------------------------|-----------------|---------------|------------|-------------|-----------------|----------------|----------------------|
| 770030         | WP-390E      | 0-50 bar( 726 psi,5 MPa ) | 1.6KW<br>220V   | 18L           | 10L/Min    | 1/2" BSPP   | steel           | 24             | 58*31.5*43           |
| 770031         | WP-390E      | 0-50 bar( 726 psi,5 MPa ) | 1.6KW<br>110V   | 18L           | 10L/Min    | 1/2" BSPP   | steel           | 24             | 58*31.5*43           |
| 770032         | WP-390ES     | 0-50 bar( 726 psi,5 MPa ) | 1.6KW<br>220V   | 18L           | 10L/Min    | 1/2" BSPP   | Stainless steel | 24.3           | 58*31.5*43           |
| 770033         | WP-390ES     | 0-50 bar(726 psi,5 MPa )  | 1.6KW<br>110V   | 18L           | 10L/Min    | 1/2" BSPP   | Stainless steel | 24.3           | 58*31.5*43           |
| 770034         | WP-1800E     | 0-60 bar( 860 psi,6 MPa ) | 3KW<br>220V     | 32L           | 20L/Min    | 1/2" BSPP   | steel           | 48             | 71*36.5*54           |
| 770035         | WP-1800E     | 0-60 bar( 860 psi,6 MPa ) | 3KW<br>110V     | 32L           | 20L/Min    | 1/2" BSPP   | steel           | 48             | 71*36.5*54           |



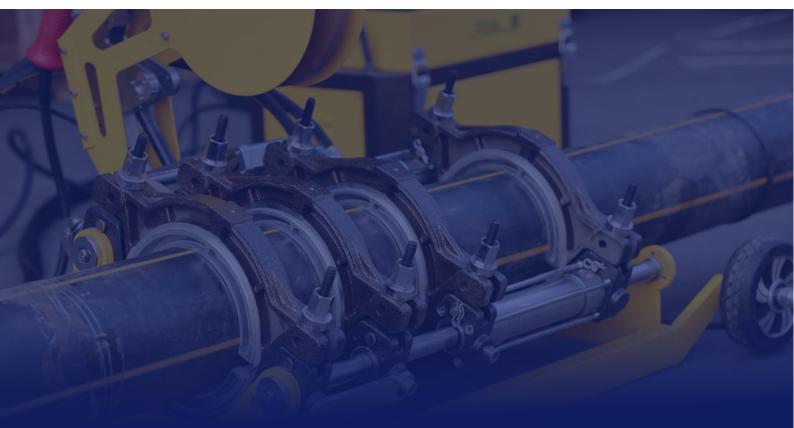



# 

## Hangzhou Welping Machinery Equipment Co., Ltd

Phone: 00 86 571 89332538 E-mail: top@welping.cn Web: www.welpingtool.com Office address: Room 1904 Building 1, Taifu Plaza, No. 1 Tonghui Middle Road, Xiaoshan District, Hangzhou Factory address: No. 2 Jinyuan Road, Puyang Town, Xiaoshan District, Hangzhou, China