


# Stub end devices

## SPECIFICATIONS

| Size (mm) | Clamping range (mm) | For machine models |
|-----------|---------------------|--------------------|
| 160       | 75-180              | WP160A             |
| 200       | 75-225              | WP200A             |
| 250       | 110-280             | WP250A             |
| 315       | 110-355             | WP315A             |
| 355       | 160-400             | WP355A             |
| 400       | 200-450             | WP400A             |
| 450       | 225-500             | WP450A             |
| 500       | 280-560             | WP500A             |
| 630       | 355-710             | WP630A             |
| 800       | 560-990             | WP800A             |
| 1000      | 620-1210            | WP1000A            |
| 1200      | 720-1420            | WP1200A            |
| 1400      | 950-1575            | WP1400A            |
| 1600      | 1050-1860           | WP1600A            |
| 1800      | 1200-1800           | WP1800A            |
| 2000      | 1400-2000           | WP2000A            |
| 2250      | 1600-2250           | WP2250A            |

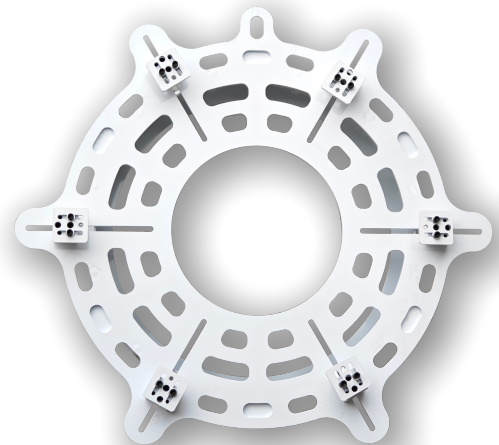

Applicable to butt fusion welding machines, model FX, Apro, A and B series, used for welding short pipes and fittings. Suitable for the entire range of welding machines, customizable upon request.

Steel panel with precise laser cutting and welding.

