

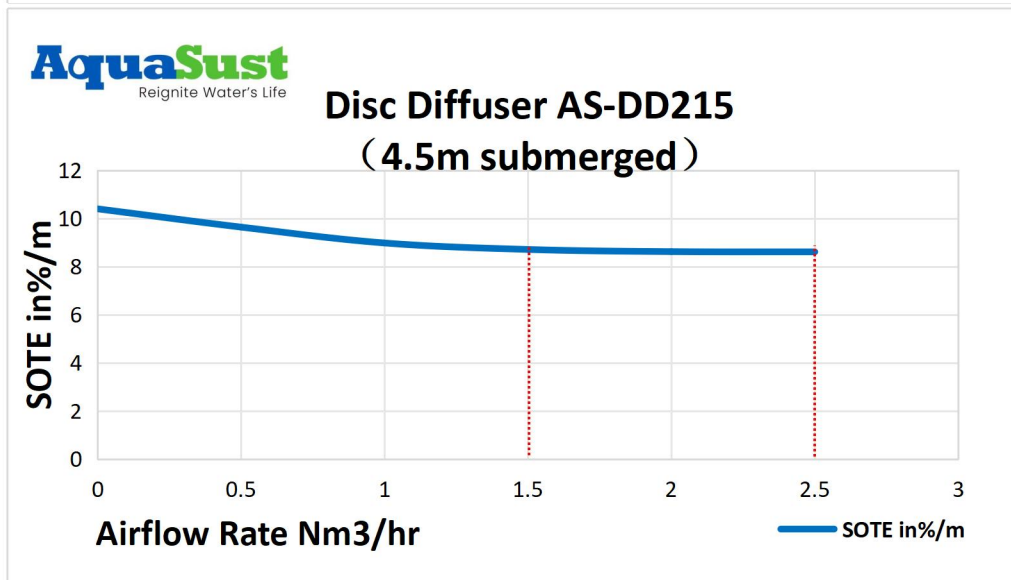


Disc Diffuser SOTE (oxygen transfer efficiency) curve

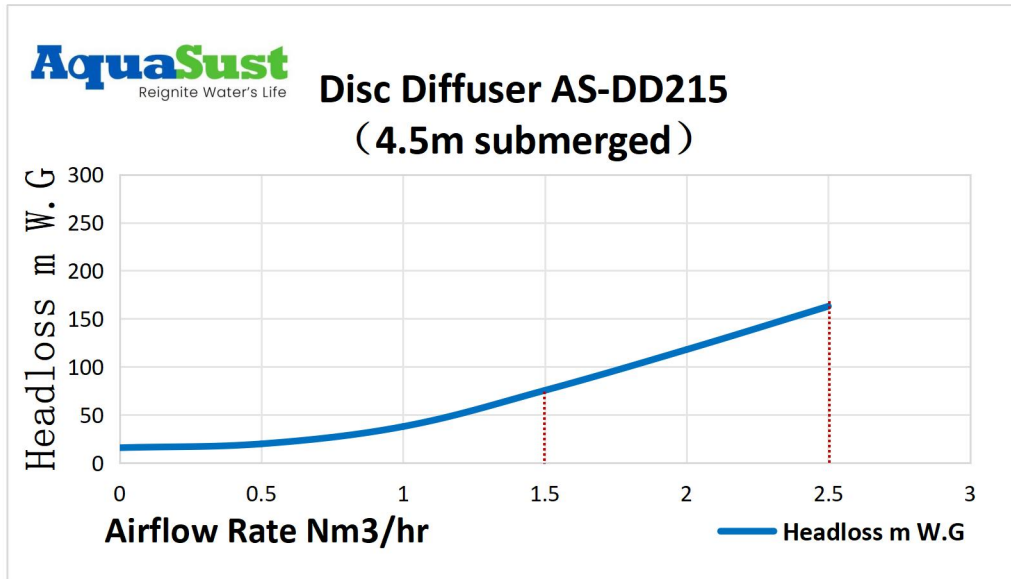


Design Flow	Flow Range	Service Area	Number of perforations	Service Life	SOTE(6m submerged)
1.5-2.5 (m3/h)	1.0-5 (m3/h)	0.2-0.64 (m2)	4400 (Pcs)	3 to 7 (years)	≥38%

**Disc Diffuser AS-DD270
(4.5m submerged)**

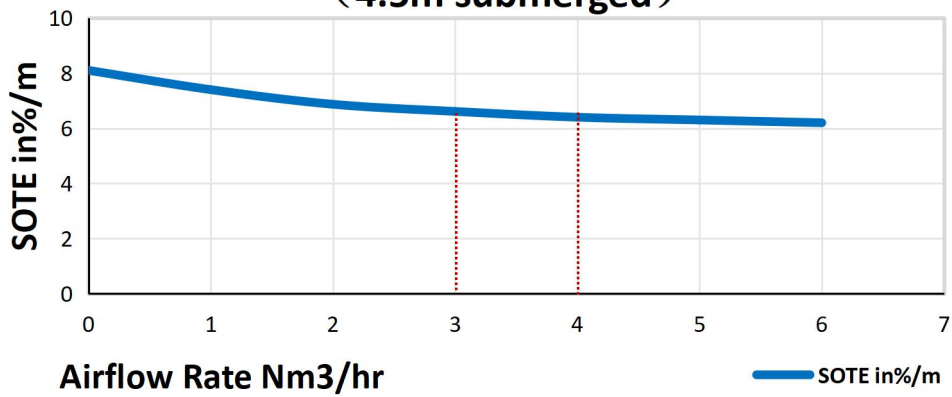


**Disc Diffuser AS-DD270
(4.5m submerged)**

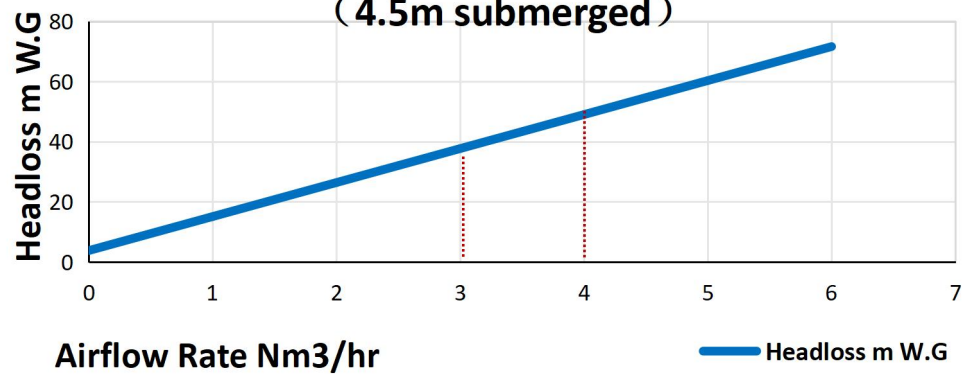


Design Flow	Flow Range	Service Area	Number of perforations	Service Life	SOTE(6m submerged)
3.0-4.0 (m3/h)	1.5-8.0 (m3/h)	0.25-1.0 (m2)	6600 (Pcs)	3 to 7 (years)	≥38%

Disc Diffuser AS-DD350
(4.5m submerged)

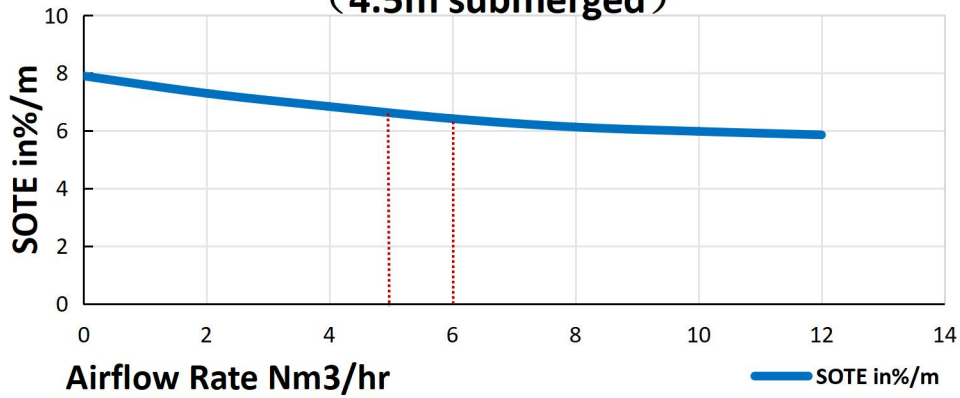

Disc Diffuser AS-DD350
(4.5 submerged)

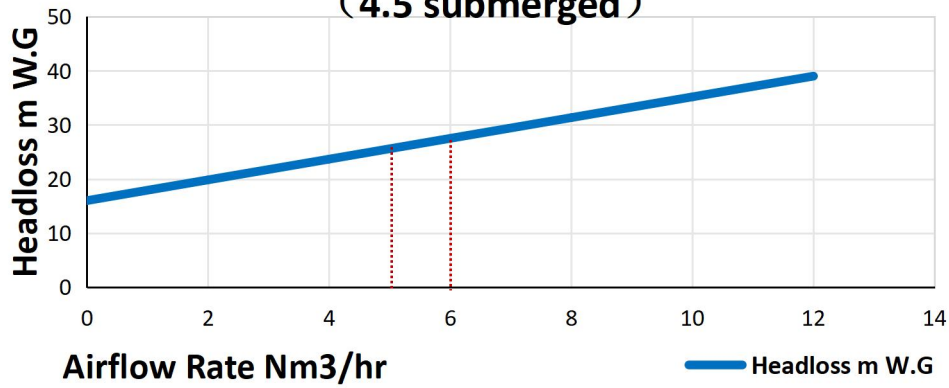

Design Flow	Flow Range	Service Area	Number of perforations	Service Life	SOTE(6m submerged)
5.0–6.0 (m ³ /h)	2.0–12.0 (m ³ /h)	0.4–1.5 (m ²)	11440 (Pcs)	3 to 7 (years)	≥38%