


# Directions for installing and using spa cover remover models:

---


## INSTALLATION:

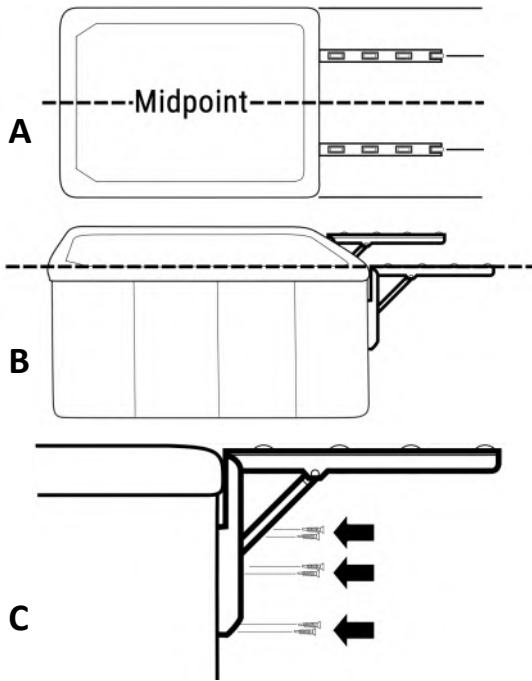

1. Select a spa side opposite the spa cover fold for placement of The Slider. (Don't mount on equipment access panel).
2. Determine midpoint of the spa side panel chosen.
3. Locate each of the 2 roller brackets half way between midpoint and spa edge (fig. A).
4. Align top of each of the 2 roller brackets with top edge of spa shell (fig. B).
5. With a pencil, mark your cabinet where each of the (6) screws will be located (fig. C).
6. Secure each roller bracket with screws. **DO NOT OVERTIGHTEN**, which could damage cabinet.

---

## OPERATION:

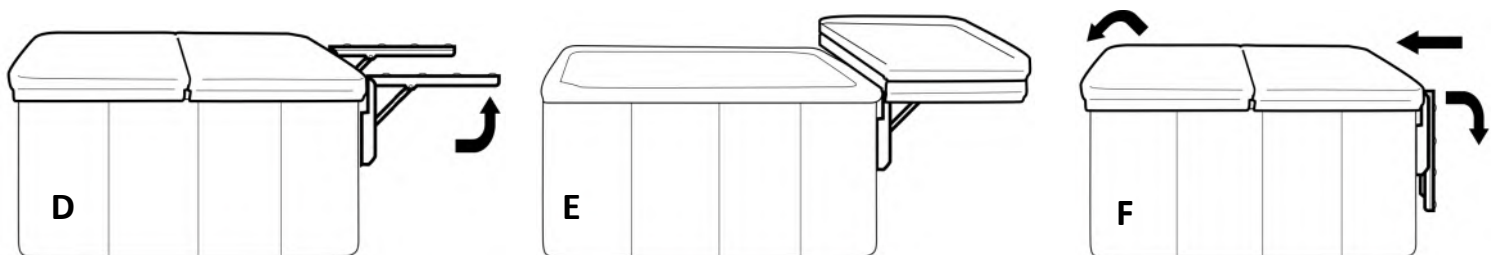

1. Fold each roller bracket upward, then secure bottom edge into the brace to lock in place (fig. D).
2. Fold spa cover in half, then push onto the top of The Slider to roll it off of the spa (fig. E).
3. When finished using the spa, reverse the above procedure (fig. F).

## WARNING:

Old, waterlogged spa covers can be very heavy. Replace unserviceable spa covers to avoid damaging The Cover Roller. Remove snow from spa cover prior to removal. Do not allow weight on The Cover Roller to exceed 100 lbs. Do not sit on or place heavy objects on the open spa cover. Do not twist the roller brackets sideways, which may damage The Cover Roller. After each use, retract the (2) roller brackets to the lowered position (fig. F).