

Split Case & Double Suction Centrifugal Pump

CPS Series Brochure



Hunan Zhongda Energy saving Pump Industry Co., Ltd

Performance range

Capacity: 100~30000m³/h

Head: 7~220m

Efficiency: 92%

Power: 15~4000kW

Inlet Dia.: 150~1600mm

Outlet Dia.: 100~1400mm

Working Pressure: ≤2.5MPa


Temperature: -20℃~80℃

Applications

- Power industry
- Papermaking industry
- Iron and steel industry
- The petrochemical industry
- Water industry
- Desalination of sea water

Type nomenclature

CPS □ — □ (M) A / □

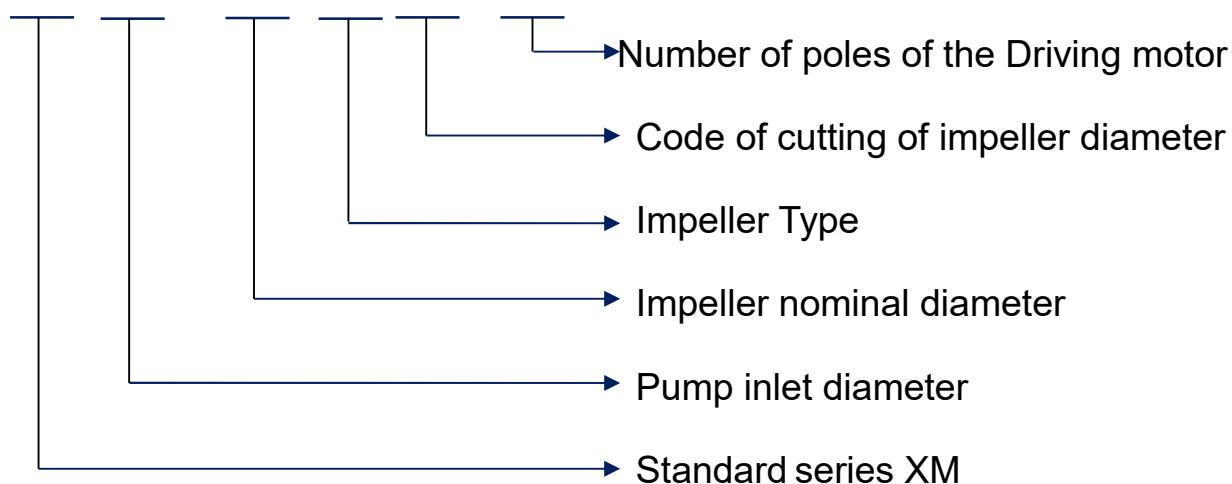

Design Details

Design

- Volute Casing Pump
- Horizontal/Vertical installation
- Single-Stage
- Excellent hydraulic performance, high efficiency, good cavitation performance.

Pump Casing

- For casing, using ANSYS for optimizing structure, high-intensity.

Pump Impeller

- Staggered vane construction for changing the rate of impeller through pump tongue, which decrease the liquid pulse 1‰ ~ 4‰ of the head, more stable flow, higher efficiency, less vibration, working more steady.

Pump Shaft

- The shaft is full sealing which could achieve touchless with liquid, bearing parts are oil lip sealing and V-type sealing ring, which protect against leaking, dust, water and humidity.
- Shaft sealing is packing seal interchangeable with single end surface mechanical-seal; or equip with Cartridge mechanical seal, double mechanical seal, and flushing system by standard API682 as per customers' requirement.

Bearing

- For bearing, applying with short span, thicken shaft, which achieves small deflection when rotator running, and works more stable.
- Bearing lubrication, grease for standard, oil for customized.
- Bearing is assembled with interface for testing temperature and vibration, convenient for remote control.


Inlet and outlet Flange Standards

- Pump inlet and outlet flange could be by ISO, DIN, BS, ANSI, KS standards etc.


Others

- Except for casing and impeller, all the other parts had achieved modular designed and standardization of spare parts; all the bearing, sealing part, shaft sleeve in the same shaft series could be interchangeable.
- Default pump rotation is clockwise from driven.

Model spectrum

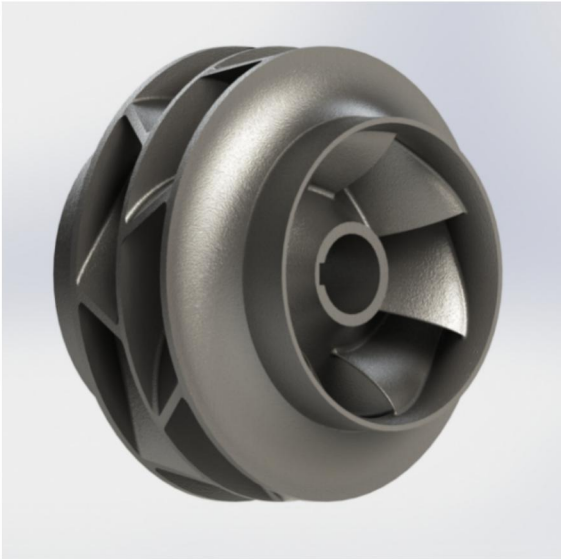

Staggered vane construction makes flow more stable, pressure pulsation decreasing. Double curvature, streamline inlet, high efficiency, good cavitation performance.

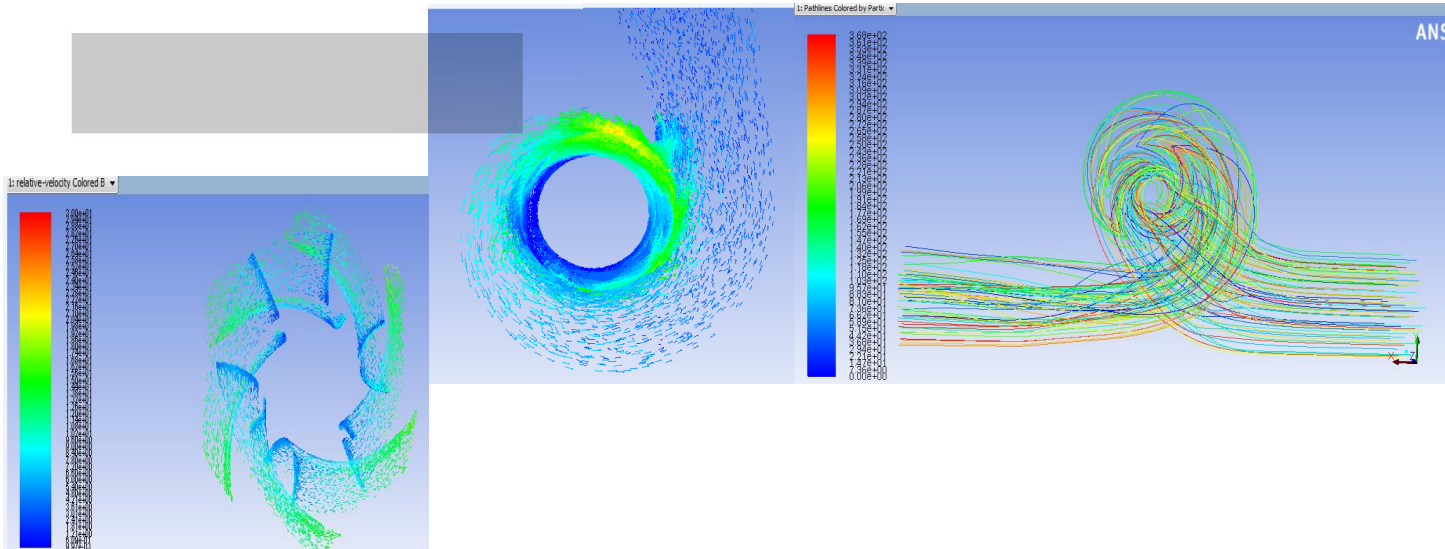

Analyzing by CFD, pump efficiency is improve up to 92%



Vertical type



Horizontal type



Chart 1



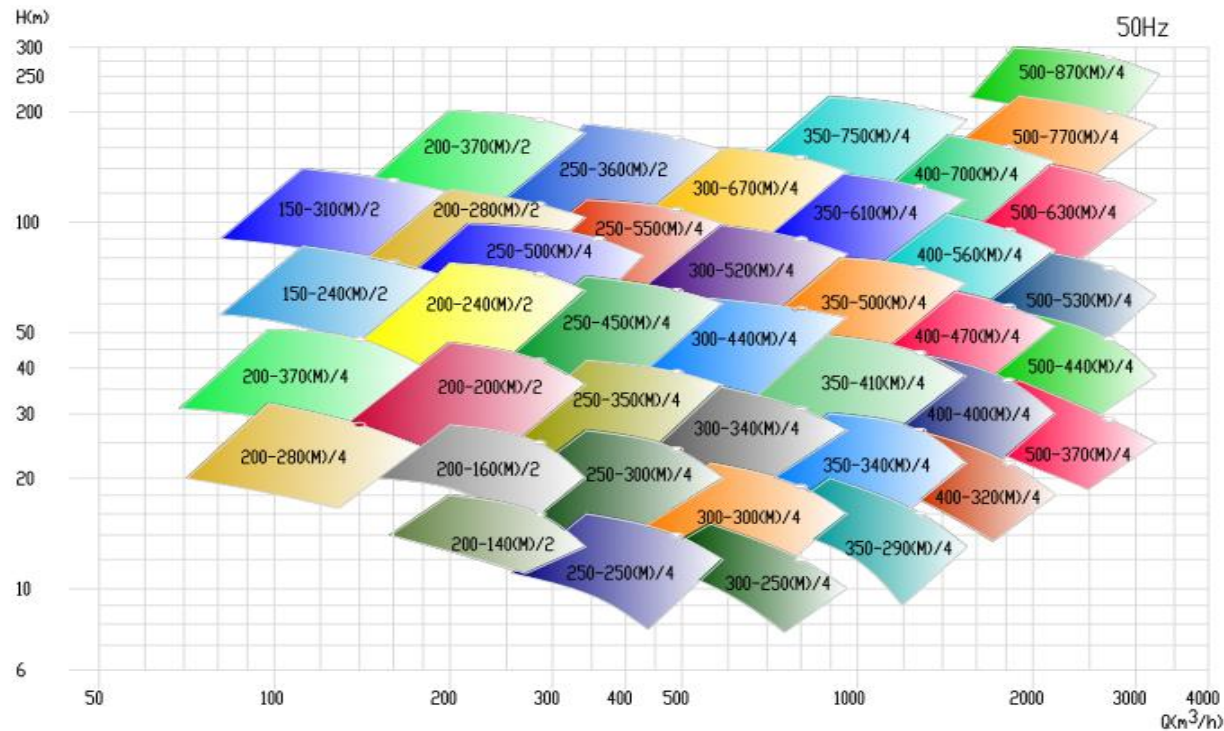


Chart 2

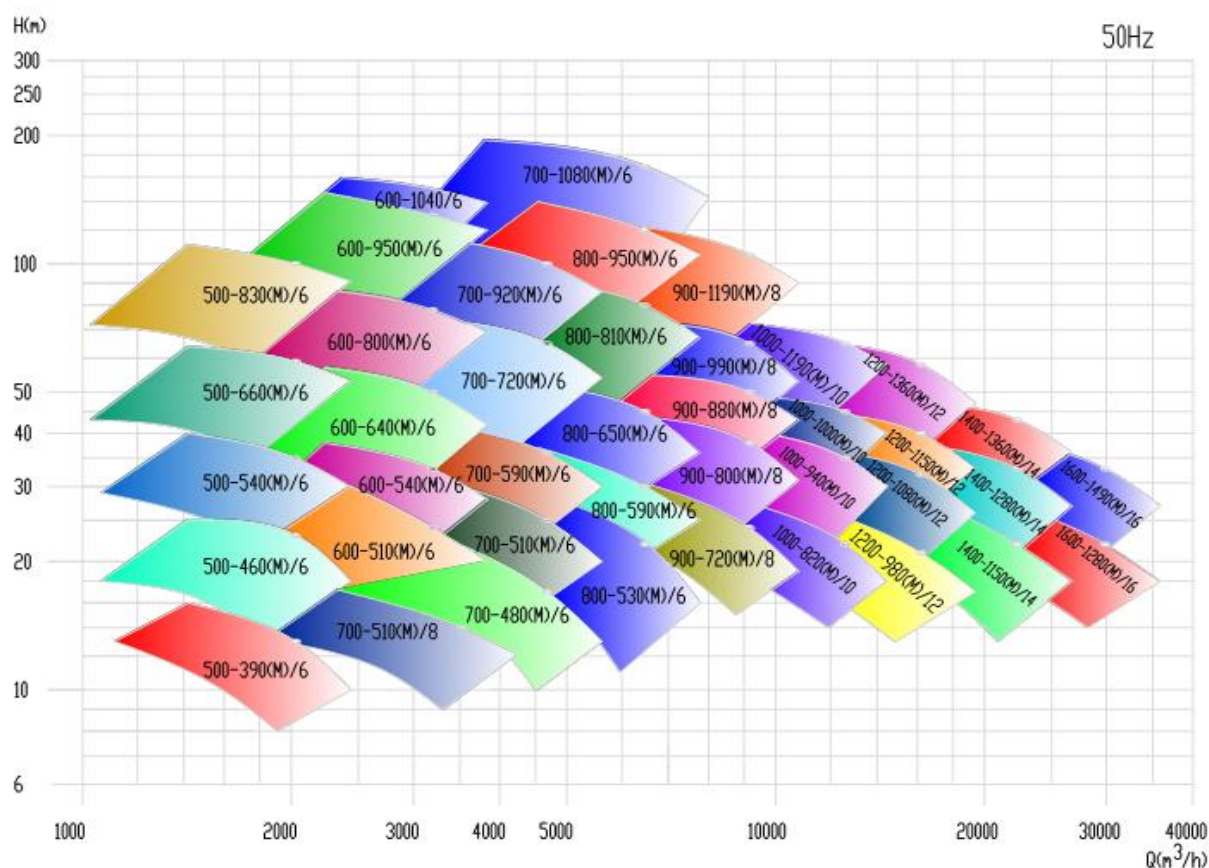

Performance Range chart 60HZ

Chart 1

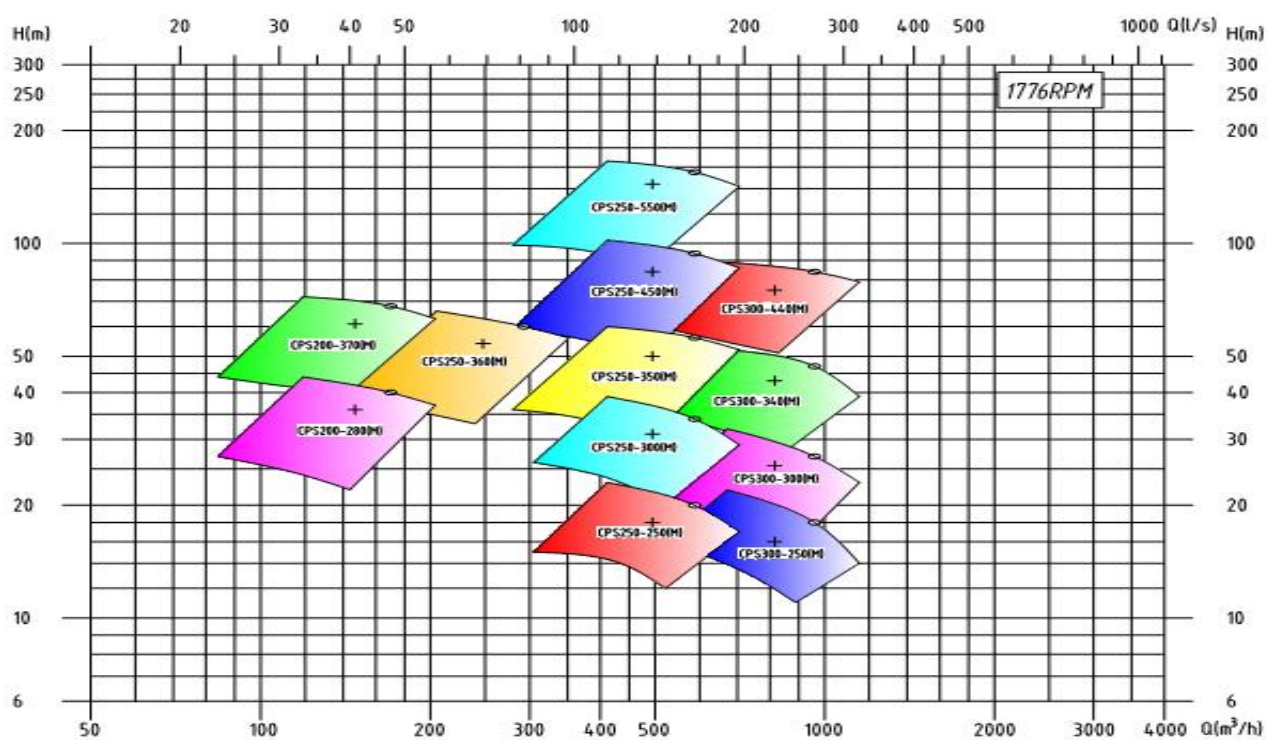

Chart

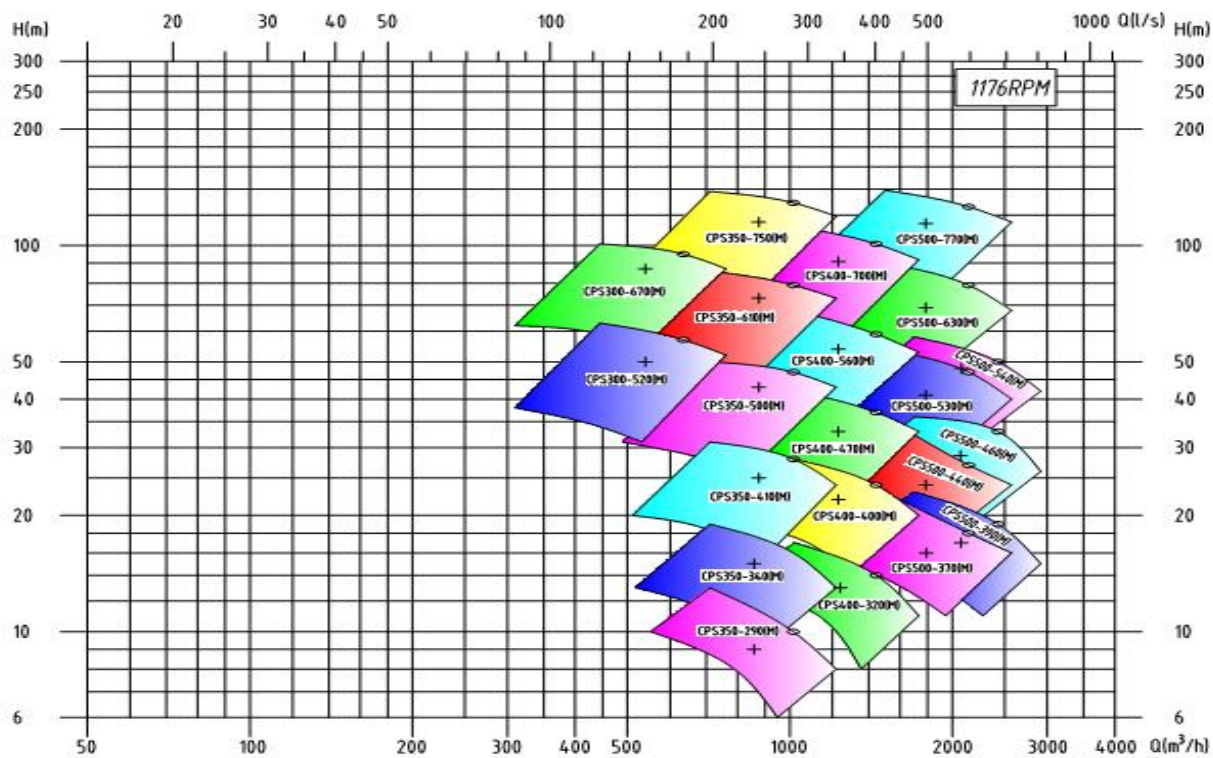


Chart3



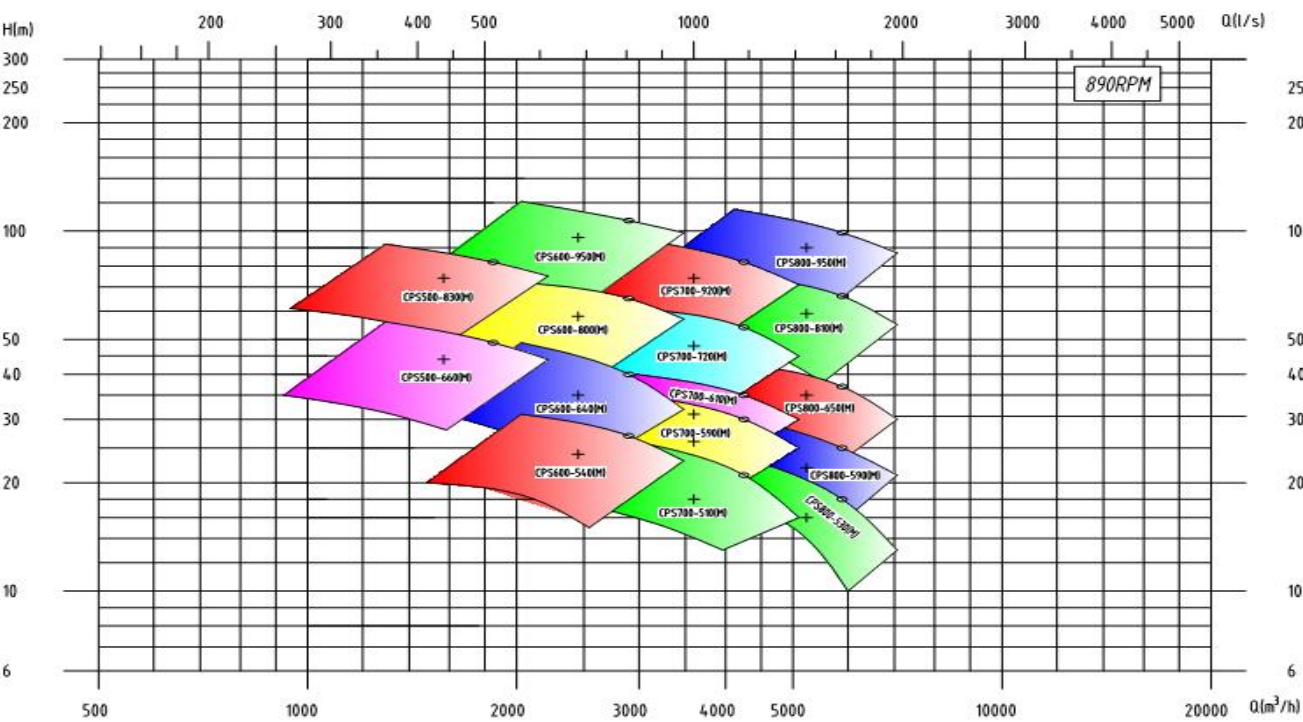


Chart 4

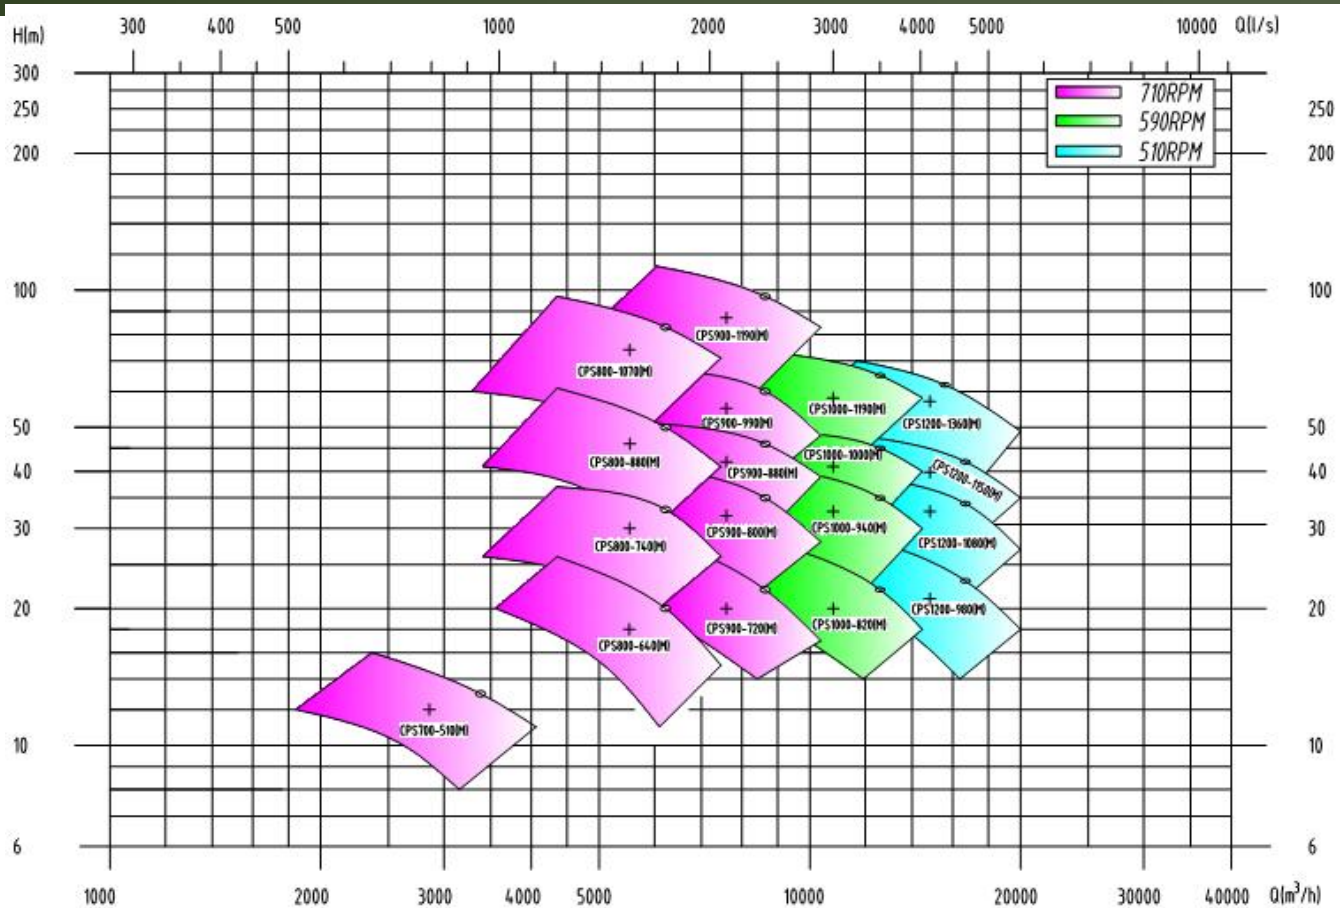


SECTIONAL DRAWING

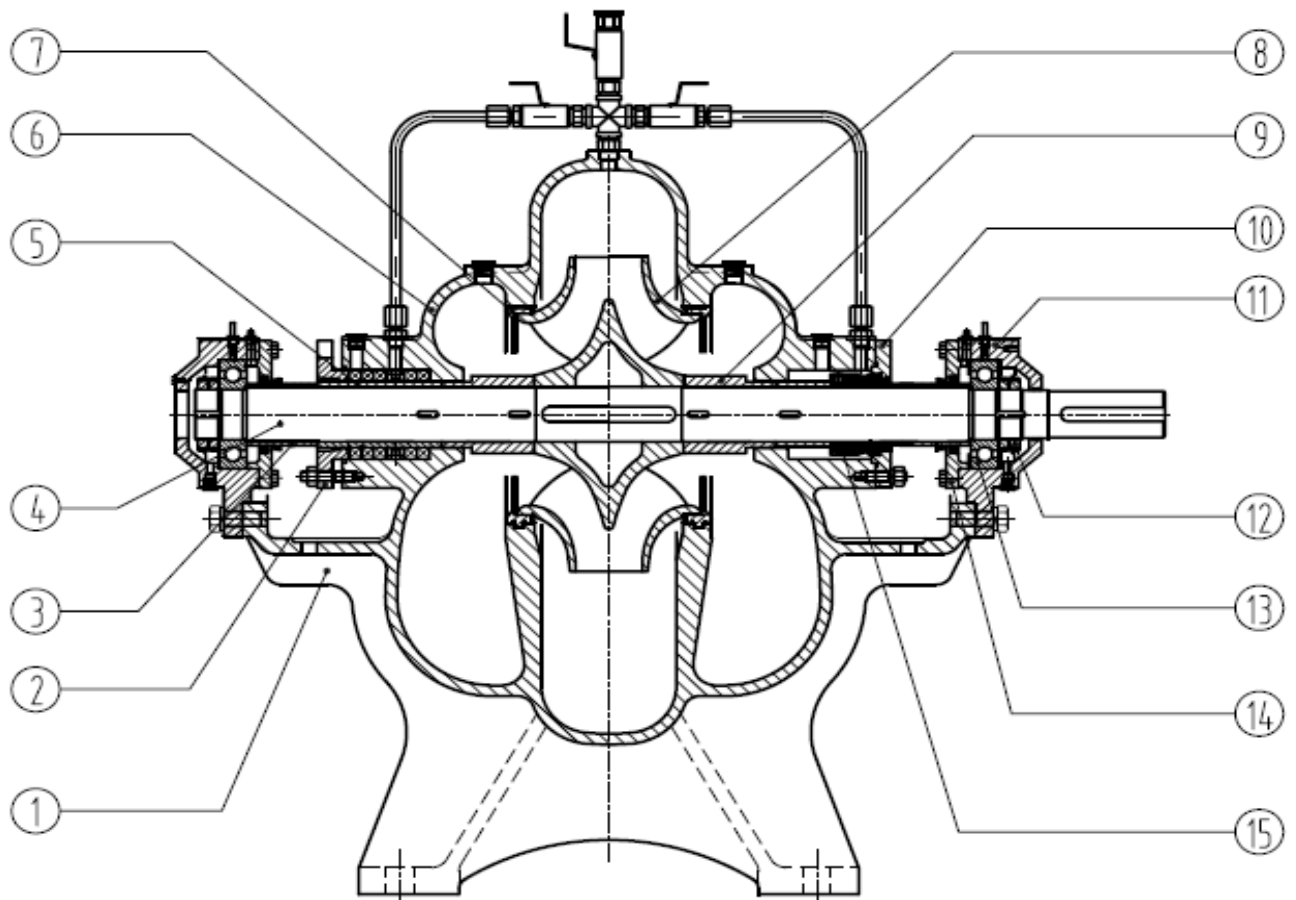

NO.	NAME	MATERIAL										Q'TY
		CLAS S1	CLAS S2	CLAS S3	CLAS S4	CLAS S5	CLAS S6	CLAS S7	CLAS S8	CLASS 9	CLASS1 0	
1	Lower casing	GC200					BC6	SSC1 3	SSC1 4	SSC16	GCD45	1
2	Packing gland	GC200					BC6	SSC1 3	SSC1 4	SSC16	GC200	2
3	Bearing sleeve	BC6			SSC13				SSC1 4	SSC16	SSC13	2
4	Shaft	SM 45C			STS 304				STS3 16	STS31 6L	STS304	1
5	Lantern ring	BC6			SSC13				SSC1 4	SSC16	SSC13	2
6	Upper casing	GC200					BC6	SSC1 3	SSC1 4	SSC16	GCD45	1
7	Casing wear ring	BC6		SSC1 3	BC6	SSC1 3	BC6	SSC1 3	SSC1 4	SSC16	SSC13	2
8	Impeller	GC20 0	BC6	SSC1 3	BC6	SSC1 3	BC6	SSC1 3	SSC1 4	SSC16	SSC13	1
9	Impeller sleeve	BC6			SSC13				SSC1 4	SSC16	SSC13	2

10	Mechanical seal gland	GC200	BC6	SSC1 3	SSC1 4	SSC16	GC200	2
11	Bearing housing	GC200						2
12	Round nut	SM 45C						4
13	Ball bearing	CTB2						2
14	Bearing cover	GC200						2
15	Mechanical							2

PUMP OUTLINE DIMENSIONS

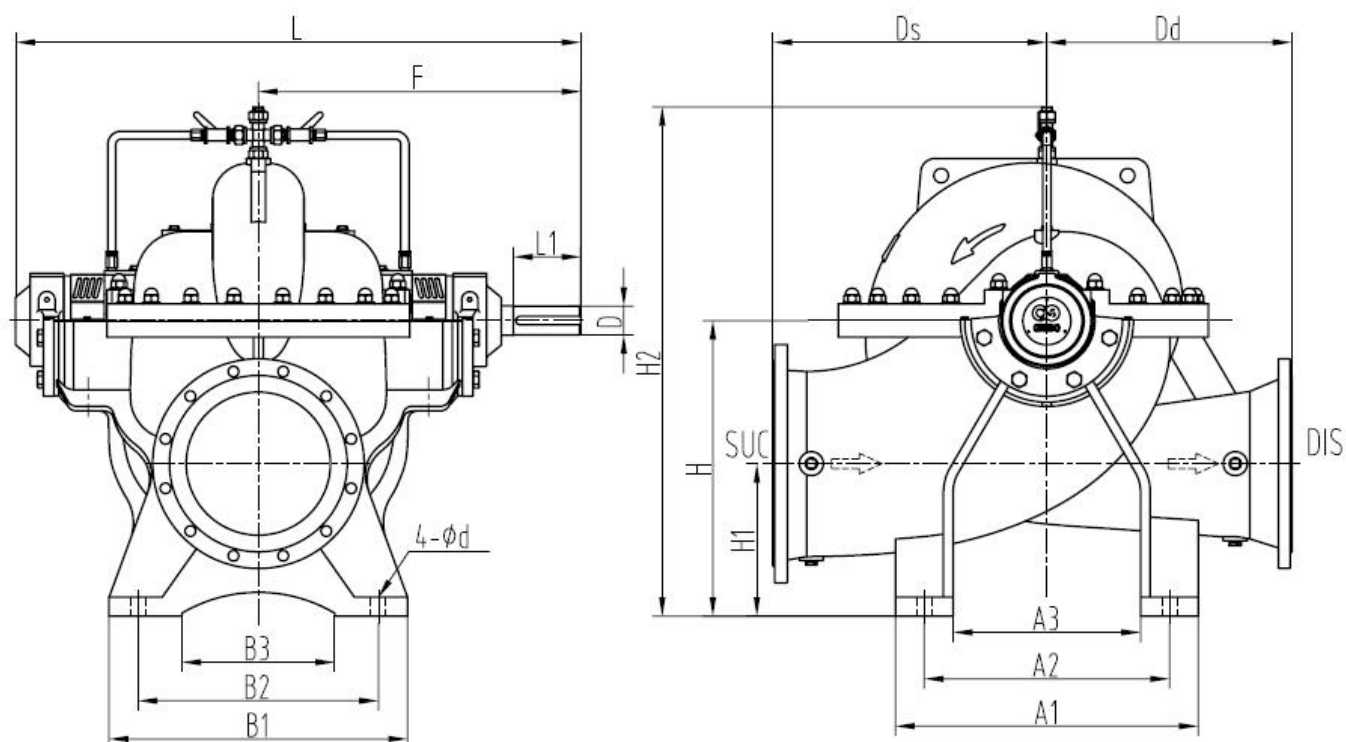

Type	Bore(mm)	Size(mm)	WT	Eff
------	----------	----------	----	-----

	Suc	Dis	A1	A2	A3	B1	B2	B3	D	Ds	Dd	F	H	H1	H2	L	L1	d	(kg)	(%)
CPS200-280	200	125	465	395	325	415	340	235	35	370	300	465	400	200	690	840	80	19	355	75
CPS200-370	200	125	490	400	310	370	300	200	40	420	330	535	410	200	745	951	110	24	475	71
CPS250-300	250	200	530	450	330	450	360	260	40	450	400	540	450	230	880	961	110	24	385	87
CPS250-350	250	200	530	450	330	450	360	260	40	450	400	540	450	230	870	961	110	24	427	86
CPS250-450	250	150	530	450	330	450	360	260	50	500	400	598	530	230	1054	1079	110	24	517	84
CPS250-500	250	200	530	450	330	450	360	260	50	550	450	598	530	230	1119	1079	110	24	580	78
CPS300-250	300	300	620	520	400	540	450	340	40	500	500	585	500	235	971	1051	110	24	515	82
CPS300-340	300	250	620	520	400	540	450	340	40	490	430	570	500	240	972	1021	110	24	473	86
CPS300-440	300	250	620	520	400	540	450	340	50	540	500	598	520	250	1030	1076	110	24	666	84
CPS300-520	300	200	700	600	450	600	500	360	60	600	500	693	550	250	1142	1234	140	28	917	81
CPS300-670	300	200	800	700	600	480	400	240	60	700	550	655	620	270	1150	1159	140	28	1135	76
CPS350-340	350	300	700	600	450	600	500	360	50	550	450	643	600	290	1170	1166	110	28	638	86
CPS350-410	350	300	680	600	450	580	500	360	60	570	510	668	620	320	1036	1184	140	28	836	88
CPS350-500	350	300	700	600	450	600	500	360	60	650	550	683	620	310	1223	1219	140	28	968	83
CPS350-610	350	300	820	700	540	670	550	400	80	650	550	808	650	300	1162	1440	170	28	1200	76

Type	Bore(mm)		Size(mm)																WT	Eff
	Suc	Dis	A1	A2	A3	B1	B2	B3	D	Ds	Dd	F	H	H1	H2	L	L1	d	(kg)	(%)
CPS350-750	350	250	800	680	560	580	500	320	90	750	620	828	740	330	1339	1476	170	28	2145	78
CPS400-320	400	400	820	700	540	670	550	400	50	700	550	683	700	350	1180	1246	110	28	690	83
CPS400-400	400	350	820	700	540	650	550	390	60	650	550	713	680	320	1300	1274	140	28	1100	86
CPS400-470	400	350	820	700	540	650	550	390	70	650	600	743	670	330	1280	1332	140	28	1120	90
CPS400-560	400	300	920	800	600	650	550	390	80	700	650	796	700	350	1349	1413	170	28	1340	87
CPS400-700	400	300	920	800	600	650	550	390	90	750	650	893	750	350	1235	1606	170	28	1860	80
CPS500-370	500	450	920	800	600	780	650	470	60	750	600	813	800	400	1524	1479	140	35	1960	88
CPS500-440	450	350	860	720	580	760	600	440	80	750	600	808	770	390	1425	1440	170	35	1600	85
CPS500-460	500	400	960	800	640	800	700	500	70	770	700	770	815	400	1420	1389	140	35	1680	88
CPS500-530	500	350	920	800	600	780	650	470	80	750	640	858	850	410	1550	1540	170	35	1628	88
CPS500-540	500	400	980	850	640	780	650	470	70	800	650	818	850	400	1570	1482	140	35	1680	88
CPS500-630	500	350	920	800	600	780	650	470	100	750	640	908	800	400	1514	1603	210	35	2420	87
CPS500-660	500	350	1060	950	730	780	650	470	80	800	700	823	800	390	1383	1470	170	35	1880	88

CPS600-510	600	500	1200	1000	800	890	750	520	70	900	800	858	950	450	1470	1570	140	35	1970	86
CPS600-540	600	500	1200	1000	800	890	750	520	80	900	800	898	940	450	1710	1620	170	35	2420	89
CPS600-640	600	500	1200	1000	800	900	750	520	95	900	760	985	980	440	1539	1775	170	42	2552	88
CPS600-690	600	500	960	800	640	800	700	500	100	850	750	993	900	450	1415	1767	210	35	2640	85
CPS600-800	600	400	1200	1000	800	890	750	520	100	940	870	980	940	470	1510	1740	210	35	3520	89
CPS700-510	700	700	1320	1120	900	1100	950	700	80	1100	850	1066	1100	540	2023	1957	170	42	3520	88
CPS700-590	700	600	1320	1120	900	1000	850	620	90	1000	850	1008	1050	500	1905	1836	170	42	3300	90
CPS700-610	700	600	1320	1120	900	1000	850	620	95	1000	900	983	1050	500	1890	1787	170	42	3575	90
CPS700-720	700	600	1320	1120	900	1100	950	700	110	1050	900	1093	1150	520	1985	1970	210	42	3960	90
CPS900-800	900	800	1600	1340	1000	1400	1150	850	125	1400	1100	1268	1420	620	2265	2329	210	42	7524	91

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS150-240/2		112	31.1	86	2970	33.6	55	78	3.5	180
		160	44.4	78		42.0		81		
		192	53.3	72		47.1		80		
	A	105	29.2	76		28.1	45	77	3.4	
		150	41.7	69		35.0		80		
		180	50.0	63		39.3		79		
	B	99	27.4	67		23.6	37	76	3.2	
		141	39.2	61		29.5		79		
		169	47.0	56		33.0		78		
	C	92	25.7	59		19.6	30	75	3.1	
		132	36.7	53		24.5		78		
		158	44.0	49		27.5		77		
CPS150-240M/2		95	26.3	77	2970	25.7	45	77	3.1	180
		135	37.5	70		32.2		80		
		162	45.0	64		35.8		79		
	A	89	24.7	68		21.7	37	76	3.0	
		127	35.3	62		27.1		79		
		152	42.3	57		30.1		78		
	B	83	23.1	60		18.1	30	75	2.9	
		119	33.1	54		22.6		78		
		143	39.7	50		25.1		77		
	C	78	21.8	53		15.3	30	74	2.8	
		112	31.1	48		19.1		77		
		134	37.3	44		21.2		76		
CPS150-310/2		112	31.1	140	2970	60.2	110	71	3.6	210
		160	44.4	130		73.6		77		
		192	53.3	124		85.3		76		
	A	105	29.2	123		50.3	90	70	3.5	
		150	41.8	114		61.4		76		
		180	50.0	109		71.3		75		
	B	99	27.4	109		42.4	75	69	3.4	
		141	39.2	101		51.7		75		
		169	47.0	96		60.0		74		
	C	92	25.7	95		35.3	55	68	3.2	
		132	36.7	88		43.0		74		
		158	44.0	84		49.9		73		
CPS150-310M/2		95	26.3	124	2970	45.6	75	70	3.2	210
		135	37.5	116		56.1		76		
		162	45.0	107		63.0		75		
	A	89	24.7	110		38.5	75	69	3.1	
		127	35.3	103		47.4		75		
		152	42.3	95		53.1		74		
	B	83	23.1	96		32.2	55	68	3.0	
		119	33.1	90		39.5		74		
		143	39.7	83		44.3		73		
	C	78	21.8	85		27.2	45	67	2.9	
		112	31.1	80		33.4		73		
		134	37.3	74		37.5		72		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS200-140/2	A	200	55.4	18	2970	12.9	22	76	4.9	320
		285	79.2	16		15.3		81		
		342	95.0	13		15.9		76		
		192	53.3	17		11.6	18.5	75	4.8	
		274	76.1	15		13.8		80		
		329	91.3	12		14.4		75		
	B	183	50.9	15		10.3	15	74	4.7	
		262	72.8	14		12.2		79		
		314	87.3	11		12.7		74		
CPS200-140M/2		168	46.7	16	2970	10.5	18.5	70	4.5	320
		245	68.1	14		12.5		75		
		288	80.0	13		14.6		70		
	A	165	45.7	15		10.0	15	69	4.4	
		235	65.3	13		11.1		74		
		282	78.3	12		13.9		69		
	B	158	43.8	14		8.9	15	68	4.2	
		225	62.5	12		9.9		73		
		270	75.0	11		12.4		68		
CPS200-160/2		200	55.4	28	2970	19.0	30	80	4.7	210
		285	79.2	25		22.8		85		
		342	95.0	20		23.6		79		
	A	192	53.3	26		17.1	30	79	4.5	
		274	76.1	23		20.5		84		
		329	91.3	18		21.2		78		
	B	183	50.9	24		15.2	22	78	4.4	
		262	72.8	21		18.2		83		
		314	87.3	17		18.8		77		
	C	175	48.6	22		13.3	18.5	77	4.3	
		250	69.4	19		16.0		82		
		300	83.3	15		16.5		76		
CPS200-160M/2		172	47.6	26	2970	15.4	22	79	4.3	210
		245	68.1	23		18.3		84		
		294	81.7	18		18.5		78		
	A	165	45.7	24		13.7	22	78	4.2	
		235	65.3	21		16.3		83		
		282	78.3	17		16.5		77		
	B	158	43.8	22		12.2	18.5	77	4.1	
		225	62.5	19		14.5		82		
		270	75.0	15		14.7		76		
	C	151	42.0	20		11.0	15	76	4.0	
		216	60.0	18		13.0		81		
		259	72.0	14		13.2		75		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS200-200/2		200	55.4	47	2970	31.9	45	80	5.4	220
		285	79.2	42		37.9		86		
		342	95.0	36		40.4		83		
	A	192	53.3	43		28.7	45	79	5.2	
		274	76.1	39		34.1		85		
		329	91.3	33		36.3		82		
	B	183	50.9	40		25.4	37	78	5.1	
		262	72.8	35		30.2		84		
		314	87.3	30		32.2		81		
	C	175	48.6	36		22.4	30	77	4.9	
		250	69.4	32		26.5		83		
		300	83.3	28		28.3		80		
CPS200-200M2		172	47.6	43	2970	25.4	37	79	4.9	220
		245	68.1	38		29.8		85		
		294	81.7	32		31.3		82		
	A	165	45.7	40		22.7	30	78	4.8	
		235	65.3	35		26.6		84		
		282	78.3	29		27.9		81		
	B	158	43.8	36		20.2	30	77	4.7	
		225	62.5	32		23.7		83		
		270	75.0	27		24.8		80		
	C	151	42.0	33		18.1	30	76	4.4	
		216	60.0	30		21.2		82		
		259	72.0	25		22.2		79		
CPS200-240/2		200	55.4	77	2970	54.3	90	77	5.4	260
		285	79.2	72		66.5		84		
		342	95.0	65		73.0		83		
	A	189	52.5	69		46.8	75	76	5.2	
		270	75.0	65		57.3		83		
		324	90.0	58		62.8		82		
	B	180	50.0	63		40.9	75	75	5.0	
		257	71.4	59		50.0		82		
		308	85.7	53		54.8		81		
	C	169	47.1	56		34.6	55	74	4.8	
		242	67.2	52		42.3		81		
		290	80.7	47		46.3		80		
CPS200-240M2		172	47.6	69	2970	42.4	75	76	4.8	260
		245	68.1	65		52.3		83		
		294	81.7	58		56.6		82		
	A	163	45.3	62		37.0	55	75	4.6	
		233	64.7	59		45.5		82		
		280	77.7	52		49.3		81		
	B	154	42.8	56		31.5	45	74	4.4	
		220	61.1	52		38.8		81		
		264	73.3	47		42.0		80		
	C	146	40.4	50		27.0	37	73	4.2	
		208	57.8	47		33.2		80		
		250	69.3	42		36.0		79		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight	
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)	
CPS200-280/2	A	200	55.4	123	2970	89.1	132	75	4.6	320	
		285	79.2	112		107.4		81			
		342	95.0	103		126.3		76			
		188	52.1	109		75.1	110	74	4.4		
		268	74.4	99		90.4		80			
		322	89.3	91		106.4		75			
		B	175	48.6		95	61.8	90	73		4.2
			250	69.4		86	74.3		79		
			300	83.3		79	87.5		74		
	C	164	45.5	83		51.4	75	72	4.0		
		234	65.0	76		61.7		78			
		281	78.0	69		72.8		73			
CPS200-280M/2	A	172	47.6	112	2970	70.7	110	74	4.1	320	
		245	68.1	101		84.3		80			
		294	81.7	94		100.4		75			
		161	44.7	99		59.3	90	73	4.0		
		230	63.9	89		70.6		79			
		276	76.7	83		84.2		74			
		B	151	42.0		87	49.8	75	72		3.8
			216	60.0		79	59.2		78		
			259	72.0		73	70.7		73		
	C	141	39.1	75		40.7	75	71	3.7		
		201	55.8	68		48.3		77			
		241	67.0	63		57.7		72			
CPS200-280/4	A	98	27.2	32	1480	11.4	18.5	75	1.8	320	
		140	38.9	28		13.2		81			
		170	47.2	25		15.2		76			
		92	25.7	28		9.7	15	74	1.7		
		132	36.7	25		11.2		80			
		158	44.0	22		12.5		75			
		B	86	23.9		25	7.9	15	73		1.6
			123	34.2		22	9.2		79		
			148	41.0		19	10.2		74		
	C	81	22.4	22		6.6	11	72	1.5		
		115	31.9	19		7.6		78			
		138	38.3	16		8.5		73			
CPS200-280M/4	A	84	23.3	28	1480	8.7	15	74	1.7	320	
		120	33.3	25		10.2		80			
		144	40.0	23		12.0		75			
		79	22.0	25		7.3	15	73	1.6		
		113	31.4	22		8.6		79			
		136	37.7	20		10.2		74			
		B	74	20.6		22	6.1	11	72		1.5
			106	29.4		20	7.2		78		
			127	35.3		18	8.5		73		
	C	69	19.3	19		5.1	11	71	1.4		
		99	27.5	17		6.0		77			
		119	33.0	16		7.0		72			

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS200-370/2		200	55.4	202	2970	152.5	250	72	4.9	430
		285	79.2	190		191.6		77		
		370	102.8	175		235.2		75		
	A	188	52.1	179		128.6	200	71	4.7	
		268	74.4	168		161.4		76		
		322	89.3	132		156.5		74		
	B	175	48.6	155		105.9	160	70	4.5	
		250	69.4	146		132.8		75		
		300	83.3	115		128.8		73		
	C	164	45.5	136		88.1	132	69	4.3	
		234	65.0	128		110.3		74		
		281	78.0	101		107.1		72		
CPS200-370M/2		172	47.6	183	2970	120.4	200	71	4.4	430
		245	68.1	171		150.2		76		
		294	81.7	165		178.6		74		
	A	161	44.7	161		101.0	160	70	4.3	
		230	63.9	151		125.9		75		
		276	76.7	145		149.8		73		
	B	151	42.0	142		84.9	132	69	4.0	
		216	60.0	133		105.7		74		
		259	72.0	128		125.8		72		
	C	141	39.1	123		69.4	110	68	3.9	
		201	55.8	115		86.3		73		
		241	67.0	111		102.8		71		
CPS200-370/4		98	27.2	51	1480	18.9	37	72	1.5	430
		140	38.9	48		23.8		77		
		186	51.7	42		28.4		75		
	A	92	25.7	45		16.1	30	71	1.4	
		132	36.7	43		20.2		76		
		158	44.0	30		17.8		74		
	B	86	23.9	39		13.2	22	70	1.3	
		123	34.2	37		16.6		75		
		148	41.0	26		14.6		73		
	C	81	22.4	34		10.9	18.5	69	1.2	
		115	31.9	32		13.7		74		
		138	38.3	23		12.1		72		
CPS200-370M/4		84	23.3	46	1480	14.8	22	71	1.3	430
		120	33.3	43		18.5		76		
		144	40.0	41		21.7		74		
	A	79	22.0	41		12.6	18.5	70	1.2	
		113	31.4	38		15.6		75		
		136	37.7	36		18.4		73		
	B	74	20.6	36		10.5	18.5	69	1.1	
		106	29.4	34		13.1		74		
		127	35.3	32		15.4		72		
	C	69	19.3	31		8.7	15	68	1.0	
		99	27.5	29		10.8		73		
		119	33.0	28		12.7		71		

参数(Para.)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
型号(Type)		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS250-250/4		343	95.3	16	1480	18.7	30	80	4.6	360
		490	136.1	14		21.7		86		
		588	163.3	12		23.4		82		
	A	329	91.4	15		16.7	30	79	4.4	
		470	130.6	13		19.4		85		
		564	156.7	11		20.9		81		
	B	315	87.5	13		14.8	22	78	4.4	
		450	125.0	12		17.2		84		
		540	150.0	10		18.6		80		
	C	302	84.0	12		13.3	18.5	77	4.2	
		432	120.0	11		15.4		83		
		518	144.0	9		16.7		79		
CPS250-250M/4		291	80.7	14	1480	14.0	22	79	3.9	360
		415	115.3	13		17.3		85		
		498	138.3	10		16.7		81		
	A	279	77.4	13		12.5	18.5	78	3.8	
		398	110.6	12		15.4		84		
		478	132.7	9		15.0		80		
	B	267	74.3	12		11.2	18.5	77	3.7	
		382	106.1	11		13.8		83		
		458	127.3	8		13.4		79		
	C	256	71.0	11		9.9	15	76	3.6	
		365	101.4	10		12.2		82		
		438	121.7	8		11.8		78		
		378	105.0	17		21.9	37	80	4.8	
		540	150.0	15		26.0		85		
		621	172.5	13		26.8		82		
CPS250-300/4		343	95.3	27	1480	31.1	45	81	3.5	350
		490	136.1	24		36.8		87		
		588	163.3	20		37.7		85		
	A	329	91.4	25		27.8	37	80	3.4	
		470	130.6	22		32.9		86		
		564	156.7	18		33.7		84		
	B	315	87.5	23		24.7	37	79	3.3	
		450	125.0	20		29.2		85		
		540	150.0	17		29.9		83		
	C	302	84.0	21		22.2	30	78	3.2	
		432	120.0	19		26.1		84		
		518	144.0	16		26.8		82		
CPS250-300M/4		291	80.7	24	1480	23.7	37	80	3.2	350
		415	115.3	22		28.9		86		
		498	138.3	19		30.7		84		
	A	279	77.4	22		21.2	30	79	3.1	
		398	110.6	20		25.8		85		
		478	132.7	17		27.4		83		
	B	267	74.3	20		19.0	30	78	3.0	
		382	106.1	19		23.1		84		
		458	127.3	16		24.5		82		
	C	256	71.0	19		16.8	30	77	2.9	
		365	101.4	17		20.4		83		
		438	121.7	15		21.7		81		
CPS250-300N/4		378	105.0	28	1480	36.0	55	80	3.8	350
		540	150.0	25		42.8		86		
		621	172.5	21		42.8		83		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS250-360/2	A	343	95.3	185	2970	218.8	355	79	6.8	485
		490	136.1	170		273.4		83		
		588	163.3	157		306.7		82		
		322	89.4	163		183.4	315	78	6.6	
		460	127.8	150		229.0		82		
		552	153.3	138		256.9		81		
	B	302	84.0	144		153.8	250	77	6.3	
		432	120.0	132		192.0		81		
		518	144.0	122		215.4		80		
	C	281	78.2	125		125.6	220	76	6.0	
		402	111.7	114		156.6		80		
		482	134.0	106		175.8		79		
CPS250-360M/2		291	80.7	165	2970	167.4	250	78	6.1	485
		415	115.3	151		208.2		82		
		498	138.3	140		234.5		81		
	A	273	75.8	146		140.7	220	77	5.9	
		390	108.3	133		174.9		81		
		468	130.0	124		197.0		80		
	B	256	71.0	128		116.9	200	76	5.7	
		365	101.4	117		145.2		80		
		438	121.7	108		163.6		79		
	C	238	66.1	111		95.7	160	75	5.5	
		340	94.4	101		118.8		79		
		408	113.3	94		133.9		78		
CPS250-360N/2		378	105.0	190	2970	247.7	355	79	7.2	485
		540	150.0	175		310.2		83		
		621	172.5	160		338.3		80		
CPS250-350/4		343	95.3	42	1480	49.1	75	80	3.1	390
		490	136.1	39		60.5		86		
		588	163.3	36		68.6		84		
	A	326	90.6	38		42.7	75	79	3.0	
		466	129.4	35		52.7		85		
		559	155.3	33		59.8		83		
	B	309	85.8	34		36.7	55	78	2.9	
		441	122.5	32		45.2		84		
		529	147.0	29		51.3		82		
	C	292	81.1	30		31.4	45	77	2.7	
		417	115.8	28		38.7		83		
		500	139.0	26		43.9		81		
CPS250-350M/4		291	80.7	38	1480	38.1	55	79	2.7	390
		415	115.3	35		46.6		85		
		498	138.3	31		50.1		84		
	A	276	76.6	34		33.0	55	78	2.6	
		394	109.4	32		40.3		84		
		473	131.3	28		43.4		83		
	B	262	72.7	31		28.6	45	77	2.5	
		374	103.9	28		34.9		83		
		449	124.7	25		37.5		82		
	C	247	68.6	27		24.4	37	76	2.4	
		353	98.1	25		29.7		82		
		424	117.7	22		32.0		81		
CPS250-350N/4		378	105.0	43	1480	55.3	90	80	3.3	390
		540	150.0	40		68.4		86		
		621	172.5	37		74.5		84		

参数(Para.)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
型号(Type)		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS250-450/4		343	95.3	71	1480	82.9	132	80	2.6	480
		490	136.1	65		103.3		84		
		588	163.3	60		117.2		82		
	A	322	89.4	63		69.5	110	79	2.5	
		460	127.8	57		86.5		83		
		552	153.3	53		98.2		81		
	B	302	84.0	55		58.3	90	78	2.4	
		432	120.0	51		72.5		82		
		518	144.0	47		82.3		80		
	C	281	78.2	48		47.6	75	77	2.3	
		402	111.7	44		59.1		81		
		482	134.0	40		67.2		79		
CPS250-450M/4		291	80.7	64	1480	64.1	110	79	2.3	480
		415	115.3	58		79.0		83		
		498	138.3	53		88.8		81		
	A	273	75.8	57		53.9	90	78	2.2	
		390	108.3	51		66.4		82		
		468	130.0	47		74.6		80		
	B	256	71.0	50		44.8	75	77	2.1	
		365	101.4	45		55.1		81		
		438	121.7	41		61.9		79		
	C	238	66.1	43		36.6	75	76	2.0	
		340	94.4	39		45.1		80		
		408	113.3	36		50.7		78		
CPS250-450N/4		378	105.0	73	1480	94.0	160	80	2.8	480
		540	150.0	68		120.5		83		
		621	172.5	63		133.2		80		
CPS250-500/4		215	59.7	99	1480	81.7	160	71	2.8	500
		360	100.0	90		117.7		75		
		430	119.4	81		130.0		73		
CPS250-550/4		343	95.3	115	1480	145.2	220	74	2.4	580
		490	136.1	108		182.5		79		
		588	163.3	99		203.3		78		
	A	322	89.4	101		121.8	200	73	2.3	
		460	127.8	95		152.9		78		
		552	153.3	87		170.4		77		
	B	302	84.0	89		102.3	160	72	2.2	
		432	120.0	84		128.3		77		
		518	144.0	77		143.0		76		
	C	281	78.2	77		83.6	132	71	2.1	
		402	111.7	73		104.7		76		
		482	134.0	67		116.8		75		
CPS250-550M/4		291	80.7	106	1480	114.9	200	73	2.2	580
		415	115.3	100		144.9		78		
		498	138.3	92		162.1		77		
	A	273	75.8	94		96.7	160	72	2.1	
		390	108.3	88		121.9		77		
		468	130.0	81		136.3		76		
	B	256	71.0	82		80.4	132	71	2.1	
		365	101.4	77		101.2		76		
		438	121.7	71		113.2		75		
	C	238	66.1	71		65.9	110	70	2.0	
		340	94.4	67		82.9		75		
		408	113.3	62		92.7		74		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS250-550N/4		378	105.0	118	1480	164.2	250	74	2.6	580
		540	150.0	110		210.2		77		
		621	172.5	102		230.1		75		
CPS300-250/4		560	155.6	15	1480	28.6	37	80	5.5	470
		800	222.2	12		30.4		86		
		960	266.7	10		31.5		83		
	A	538	149.3	14		25.6	30	79	5.4	
		768	213.3	11		27.2		85		
		922	256.0	9		28.2		82		
	B	515	143.1	13		22.8	30	78	5.2	
		736	204.4	10		24.2		84		
		883	245.3	8		25.1		81		
CPS300-250M/4		476	132.2	14	1480	23.0	30	79	5.0	470
		680	188.9	11		24.0		85		
		816	226.7	9		24.4		82		
	A	457	127.0	13		20.6	30	78	4.9	
		653	181.4	10		21.5		84		
		784	217.7	8		21.9		81		
	B	438	121.7	12		18.4	22	77	4.7	
		626	173.9	9		19.2		83		
		751	208.7	8		19.5		80		
CPS300-250N/4		630	175.0	16	1480	34.3	45	80	5.8	470
		900	250.0	13		37.5		85		
		1035	287.5	11		37.8		82		
CPS300-300/4		560	155.6	22	1480	40.9	55	82	5.6	430
		800	222.2	19		47.1		88		
		960	266.7	16		49.2		85		
	A	538	149.3	20		36.7	55	81	5.4	
		768	213.3	18		42.1		87		
		922	256.0	15		44.1		84		
	B	515	143.1	19		32.7	45	80	5.3	
		736	204.4	16		37.5		86		
		883	245.3	14		39.3		83		
	C	493	136.9	17		29.0	37	79	5.1	
		704	195.6	15		33.2		85		
		845	234.7	12		34.8		82		
CPS300-300M/4		476	132.2	20	1480	32.0	45	81	5.3	430
		680	188.9	17		36.2		87		
		816	226.7	14		37.0		84		
	A	457	127.0	18		28.7	37	80	5.2	
		653	181.4	16		32.4		86		
		784	217.7	13		33.2		83		
	B	438	121.7	17		25.6	37	79	5.0	
		626	173.9	14		28.9		85		
		751	208.7	12		29.6		82		
	C	419	116.3	15		22.6	30	78	4.9	
		598	166.1	13		25.5		84		
		718	199.3	11		26.1		81		
CPS300-300N/4		630	175.0	24	1480	50.2	75	82	5.9	430
		900	250.0	21		59.9		86		
		1035	287.5	18		61.1		83		

参数(Para.)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
型号(Type)		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS300-340		560	155.6	36	1480	67.0	90	82	4.3	520
		800	222.2	32		79.2		88		
		960	266.7	27		81.2		87		
	A	538	149.3	33		60.0	90	81	4.1	
		768	213.3	29		70.9		87		
		922	256.0	25		72.6		86		
	B	515	143.1	30		53.5	75	80	4.0	
		736	204.4	27		63.1		86		
		883	245.3	23		64.7		85		
	C	493	136.9	28		47.4	75	79	3.8	
		704	195.6	25		55.9		85		
		845	234.7	21		57.3		84		
CPS300-340M/4		476	132.2	33	1480	53.5	75	80	3.4	520
		680	188.9	30		64.6		86		
		816	226.7	26		68.0		85		
	A	457	127.0	30		48.0	75	79	3.3	
		653	181.4	28		57.9		85		
		784	217.7	24		60.9		84		
	B	438	121.7	28		42.8	55	78	3.2	
		626	173.9	25		51.6		84		
		751	208.7	22		54.3		83		
	C	419	116.3	26		37.8	55	77	3.1	
		598	166.1	23		45.5		83		
		718	199.3	20		47.9		82		
CPS300-340N/4		630	175.0	38	1480	79.5	110	82	4.5	520
		900	250.0	34		95.8		87		
		1035	287.5	29		97.3		84		
CPS300-440/4		560	155.6	62	1480	115.3	200	82	4.6	610
		800	222.2	58		145.3		87		
		960	266.7	55		169.2		85		
	A	532	147.8	56		100.1	160	81	4.4	
		760	211.1	52		126.0		86		
		912	253.3	50		146.8		84		
	B	504	140.0	50		86.2	132	80	4.3	
		720	200.0	47		108.4		85		
		864	240.0	45		126.3		83		
	C	476	132.2	45		73.5	110	79	4.0	
		680	188.9	42		92.4		84		
		816	226.7	40		107.7		82		
CPS300-440M/4		476	132.2	58	1480	92.9	160	81	4.3	610
		680	188.9	52		112.0		86		
		816	226.7	49		129.7		84		
	A	452	125.6	52		80.6	132	80	4.2	
		646	179.4	47		97.2		85		
		775	215.3	44		112.5		83		
	B	428	119.0	47		69.4	110	79	4.0	
		612	170.0	42		83.6		84		
		734	204.0	40		96.8		82		
	C	405	112.4	42		59.2	90	78	3.8	
		578	160.6	38		71.3		83		
		694	192.7	35		82.6		81		
CPS300-440N/4		630	175.0	63	1480	131.9	200	82	4.9	610
		900	250.0	58		163.5		87		
		1080	300.0	55		190.4		85		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS300-520/4		560	155.6	99	1480	186.5	280	81	3.4	834
		800	222.2	90		239.2		82		
		960	266.7	82		258.4		83		
	A	526	146.2	87		156.8	250	80	3.3	
		752	208.9	80		201.1		81		
		902	250.7	72		217.2		82		
	B	493	136.9	77		130.3	220	79	3.2	
		704	195.6	70		167.1		80		
		845	234.7	64		180.4		81		
	C	459	127.6	67		106.8	200	78	3.1	
		656	182.2	61		136.9		79		
		787	218.7	55		147.8		80		
CPS300-520M/4		476	132.2	88	1480	140.9	220	81	3.0	834
		680	188.9	80		176.4		84		
		816	226.7	73		195.5		83		
	A	448	124.4	78		118.9	200	80	2.9	
		640	177.8	71		148.9		83		
		768	213.3	65		165.0		82		
	B	419	116.3	68		98.2	160	79	2.8	
		598	166.1	62		122.9		82		
		718	199.3	56		136.3		81		
	C	391	108.5	59		80.8	132	78	2.7	
		558	155.0	54		101.1		81		
		670	186.0	49		112.1		80		
CPS300-520N/4		630	175.0	104	1480	223.1	315	80	3.6	720
		900	250.0	94		281.1		82		
		1035	287.5	85		299.6		80		
CPS300-670/4		560	155.6	160	1480	325.4	500	75	3.4	1032
		800	222.2	150		403.6		81		
		960	266.7	138		456.8		79		
	A	526	146.2	141		274.0	450	74	3.3	
		752	208.9	133		339.4		80		
		902	250.7	122		384.3		78		
	B	493	136.9	124		227.9	400	73	3.2	
		704	195.6	116		282.0		79		
		845	234.7	107		319.4		77		
	C	459	127.6	108		186.9	315	72	3.1	
		656	182.2	101		231.1		78		
		787	218.7	93		261.8		76		
CPS300-670M/4		476	132.2	146	1480	255.8	400	74	3.1	1032
		680	188.9	138		319.5		80		
		816	226.7	127		361.9		78		
	A	448	124.4	129		216.2	355	73	3.0	
		640	177.8	122		269.8		79		
		768	213.3	112		305.7		77		
	B	419	116.3	113		178.8	280	72	2.9	
		598	166.1	107		222.9		78		
		718	199.3	98		252.6		76		
	C	391	108.5	98		147.3	250	71	2.7	
		558	155.0	93		183.4		77		
		670	186.0	86		208.0		75		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS300-670N/4		630	175.0	165	1480	377.6	560	75	3.6	990
		900	250.0	155		475.0		80		
		1035	287.5	140		512.6		77		
CPS350-290/4		896	248.9	20	1480	60.3	75	81	5.8	650
		1280	355.6	16		63.4		88		
		1536	426.7	13		64.8		84		
	A	861	239.2	18		54.1	75	80	5.6	
		1230	341.7	15		56.9		87		
		1476	410.0	12		58.2		83		
	B	825	229.1	17		48.2	55	79	5.4	
		1178	327.2	14		50.6		86		
		1414	392.7	11		51.7		82		
CPS350-290M/4		756	210.0	18	1480	46.3	55	80	5.2	650
		1080	300.0	14		47.3		87		
		1296	360.0	11		46.2		84		
	A	726	201.6	17		41.5	55	79	5.1	
		1037	288.1	13		42.4		86		
		1244	345.7	10		41.4		83		
	B	696	193.3	15		37.1	45	78	4.9	
		994	276.1	12		37.8		85		
		1193	331.3	9		36.9		82		
CPS350-290N/4		980	272.2	20	1480	65.9	90	81	6.1	650
		1400	388.9	16		71.0		86		
		1540	427.8	14		71.6		82		
CPS350-340/4		896	248.9	30	1480	88.2	132	83	5.8	580
		1280	355.6	26		101.9		89		
		1536	426.7	21		102.2		86		
	A	861	239.2	28		79.2	110	82	5.6	
		1230	341.7	24		91.4		88		
		1476	410.0	19		91.7		85		
	B	825	229.1	25		70.5	90	81	5.4	
		1178	327.2	22		81.2		87		
		1414	392.7	18		81.5		84		
	C	791	219.7	23		63.0	90	80	5.3	580
		1130	313.9	20		72.5		86		
		1356	376.7	16		72.8		83		
CPS350-340M/4		756	210.0	27	1480	67.8	90	82	5.0	580
		1080	300.0	23		76.9		88		
		1296	360.0	19		78.9		85		
	A	726	201.6	25		60.8	90	81	4.9	
		1037	288.1	21		68.9		87		
		1244	345.7	18		70.7		84		
	B	696	193.3	23		54.2	75	80	4.7	
		994	276.1	19		61.3		86		
		1193	331.3	16		63.0		83		
	C	665	184.7	21		47.9	75	79	4.6	
		950	263.9	18		54.2		85		
		1140	316.7	15		55.7		82		
CPS350-340N/4		980	272.2	30	1480	96.5	132	83	6.1	580
		1400	388.9	26		112.7		88		
		1610	447.2	22		116.3		83		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS350-410/4		896	248.9	49	1480	144.1	200	83	5.5	760
		1280	355.6	44		172.4		89		
		1536	426.7	38		182.8		87		
	A	861	239.2	45		129.4	200	82	5.4	
		1230	341.7	41		154.7		88		
		1476	410.0	35		164.1		86		
	B	825	229.1	42		115.1	160	81	5.2	
		1178	327.2	37		137.5		87		
		1414	392.7	32		145.8		85		
	C	791	219.7	38		102.9	132	80	5.0	
		1130	313.9	34		122.7		86		
		1356	376.7	30		130.2		84		
CPS350-410M/4		756	210.0	44	1480	109.2	160	83	4.7	760
		1080	300.0	39		130.4		88		
		1296	360.0	34		139.6		86		
	A	726	201.6	41		97.8	132	82	4.5	
		1037	288.1	36		116.8		87		
		1244	345.7	31		125.0		85		
	B	696	193.3	37		87.2	132	81	4.4	
		994	276.1	33		104.0		86		
		1193	331.3	29		111.4		84		
	C	665	184.7	34		77.1	110	80	4.3	
		950	263.9	30		91.9		85		
		1140	316.7	26		98.4		83		
CPS350-410N/4		980	272.2	50	1480	160.8	220	83	5.8	760
		1400	388.9	45		195.0		88		
		1610	447.2	38		198.4		84		
CPS350-500/4		896	248.9	80	1480	238.1	355	82	5.3	880
		1280	355.6	75		300.6		87		
		1536	426.7	68		334.7		85		
	A	851	236.4	72		206.7	315	81	5.1	
		1216	337.8	68		260.7		86		
		1459	405.3	61		290.4		84		
	B	806	224.0	65		177.9	280	80	4.9	
		1152	320.0	61		224.3		85		
		1382	384.0	55		249.9		83		
	C	762	211.6	58		151.8	250	79	4.7	
		1088	302.2	54		191.2		84		
		1306	362.7	49		213.1		82		
CPS350-500M/4		756	210.0	75	1480	190.7	280	81	4.8	880
		1080	300.0	68		232.6		86		
		1296	360.0	61		256.4		84		
	A	718	199.5	68		165.5	250	80	4.6	
		1026	285.0	61		201.8		85		
		1231	342.0	55		222.5		83		
	B	680	189.0	61		142.5	220	79	4.5	
		972	270.0	55		173.6		84		
		1166	324.0	49		191.5		82		
	C	643	178.5	54		121.6	200	78	4.3	
		918	255.0	49		148.0		83		
		1102	306.0	44		163.3		81		
CPS350-500N/4		980	272.2	80	1480	260.5	400	82	5.6	880
		1400	388.9	75		332.6		86		
		1610	447.2	70		365.5		84		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS350-610/4		896	248.9	137	1480	407.8	630	82	4.2	1120
		1280	355.6	125		506.8		86		
		1536	426.7	115		579.8		83		
	A	843	234.1	121		343.6	560	81	4.1	
		1204	334.4	111		426.8		85		
		1445	401.3	102		488.4		82		
	B	788	218.9	106		284.5	500	80	3.9	
		1126	312.8	97		353.2		84		
		1351	375.3	89		404.4		81		
	C	735	204.2	92		233.7	400	79	3.8	
		1050	291.7	84		289.9		83		
		1260	350.0	77		332.0		80		
CPS350-610M/4		756	210.0	126	1480	320.4	500	81	3.9	1120
		1080	300.0	115		398.0		85		
		1296	360.0	106		450.9		83		
	A	711	197.4	111		269.3	450	80	3.8	
		1015	281.9	102		334.4		84		
		1218	338.3	94		378.8		82		
	B	665	184.7	97		223.6	355	79	3.6	
		950	263.9	89		277.4		83		
		1140	316.7	82		314.5		81		
	C	620	172.3	85		183.7	315	78	3.5	
		886	246.1	77		227.8		82		
		1063	295.3	71		258.3		80		
CPS350-610N/4		980	272.2	137	1480	440.7	710	83	4.4	1120
		1400	388.9	128		581.2		84		
		1680	466.7	115		649.8		81		
CPS350-750/4		896	248.9	219	1480	676.6	1120	79	4.8	1950
		1280	355.6	205		861.2		83		
		1536	426.7	189		976.3		81		
	A	843	234.1	194		570.3	900	78	4.4	
		1204	334.4	181		725.5		82		
		1445	401.3	167		822.7		80		
	B	788	218.9	169		472.6	800	77	4.3	
		1126	312.8	159		600.8		81		
		1351	375.3	146		681.5		79		
	C	735	204.2	147		388.2	710	76	4.1	
		1050	291.7	138		493.2		80		
		1260	350.0	127		559.7		78		
CPS350-750M/4		756	210.0	196	1480	511.0	800	79	4.2	1950
		1080	300.0	183		648.7		83		
		1296	360.0	169		736.6		81		
	A	711	197.4	173		429.6	710	78	4.1	
		1015	281.9	162		545.0		82		
		1218	338.3	149		619.1		80		
	B	665	184.7	152		356.8	630	77	3.9	
		950	263.9	142		452.4		81		
		1140	316.7	131		514.0		79		
	C	620	172.3	132		293.2	560	76	3.8	
		886	246.1	123		371.6		80		
		1063	295.3	114		422.3		78		
CPS350-750N/4		980	272.2	220	1480	743.5	1120	79	5.0	1950
		1400	388.9	205		953.5		82		
		1610	447.2	188		1030.7		80		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS400-320/4		1274	353.9	27	1480	112.9	160	83	6.2	950
		1820	505.6	21		118.3		88		
		2184	606.7	18		126.0		85		
	A	1223	339.7	25		101.1	160	82	6.0	
		1747	485.3	19		105.8		87		
		2096	582.3	17		112.8		84		
	B	1172	325.5	23		90.0	132	81	5.8	
		1674	465.0	18		94.2		86		
		2009	558.0	15		100.4		83		
CPS400-320M/4		1085	301.4	25	1480	90.1	132	82	5.5	950
		1550	430.6	19		92.2		87		
		1860	516.7	16		96.5		84		
	A	1042	289.3	23		79.7	110	82	5.3	
		1488	413.3	18		81.6		87		
		1786	496.0	15		85.4		84		
	B	998	277.3	21		71.0	90	81	5.0	
		1426	396.1	16		72.6		86		
		1711	475.3	14		76.1		83		
CPS400-320N/4		1400	388.9	28	1480	128.7	160	83	6.5	950
		2000	555.6	22		137.8		87		
		2200	611.1	19		138.9		82		
CPS400-400/4		1274	353.9	44	1480	181.8	250	84	6.4	1000
		1820	505.6	38		211.7		89		
		2184	606.7	31		217.0		85		
	A	1223	339.7	41		162.7	220	83	6.2	
		1747	485.3	35		189.4		88		
		2096	582.3	29		194.2		84		
	B	1172	325.5	37		144.9	200	82	6.1	
		1674	465.0	32		168.5		87		
		2009	558.0	26		172.9		83		
	C	1121	311.5	34		128.6	200	81	5.9	
		1602	445.0	29		149.4		86		
		1922	534.0	24		153.4		82		
CPS400-400M/4		1085	301.4	39	1480	138.9	200	83	5.7	1000
		1550	430.6	34		163.1		88		
		1860	516.7	28		168.9		84		
	A	1042	289.3	36		124.4	160	82	5.5	
		1488	413.3	31		146.0		87		
		1786	496.0	26		151.2		83		
	B	998	277.3	33		110.8	160	81	5.4	
		1426	396.1	29		130.0		86		
		1711	475.3	24		134.7		82		
	C	955	265.2	30		98.2	132	80	5.2	
		1364	378.9	26		115.1		85		
		1637	454.7	22		119.4		81		
CPS400-400N/4		1400	388.9	45	1480	204.3	280	84	6.9	1000
		2000	555.6	38		238.0		87		
		2300	638.9	32		244.5		82		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS400-470/4	A	1274	353.9	67	1480	280.2	400	83	4.9	1070
		1820	505.6	58		323.1		89		
		2184	606.7	52		355.6		87		
		1223	339.7	62		250.8	82	4.8		
		1747	485.3	53		289.0	88			
		2096	582.3	48		318.2	86			
	B	1172	325.5	57		223.4	315	81	4.6	
		1674	465.0	49		257.2		87		
		2009	558.0	44		283.2		85		
	C	1121	311.5	52		198.2	280	80	4.4	
		1602	445.0	45		228.0		86		
		1922	534.0	40		251.2		84		
CPS400-470M/4		1085	301.4	60	1480	216.3	315	82	4.4	1070
		1550	430.6	52		249.5		88		
		1860	516.7	47		276.9		86		
		1042	289.3	55		193.7	280	81	4.3	
	1488	413.3	48	223.3		87				
	1786	496.0	43	247.9		85				
	B	998	277.3	51		172.6	250	80	4.2	
		1426	396.1	44		198.8		86		
		1711	475.3	40		220.8		84		
	C	955	265.2	46		153.0	220	79	4.0	
		1364	378.9	40		176.0		85		
		1637	454.7	36		195.5		83		
CPS400-470N/4		1400	388.9	68	1480	312.5	400	83	5.2	1070
		2000	555.6	59		365.3		88		
		2300	638.9	53		390.7		85		
CPS400-560/4		1274	353.9	108	1480	451.6	630	83	5.0	1250
		1820	505.6	94		529.6		88		
		2184	606.7	84		581.1		86		
		1211	336.4	98		392.6	560	82	4.8	
	1730	480.6	85	460.1		87				
	2076	576.7	76	505.0		85				
	B	1147	318.5	87		337.3	450	81	4.6	
		1638	455.0	76		395.1		86		
		1966	546.0	68		433.7		84		
	C	1083	300.8	78		287.7	400	80	4.5	
		1547	429.7	68		336.7		85		
		1856	515.7	61		369.8		83		
CPS400-560M/4		1085	301.4	98	1480	349.0	500	83	4.5	1250
		1550	430.6	85		412.5		87		
		1860	516.7	78		465.0		85		
	A	1031	286.4	89		303.2	450	82	4.4	
		1473	409.2	77		358.2		86		
		1768	491.0	70		403.8		84		
	B	977	271.3	79		260.7	355	81	4.3	
		1395	387.5	69		307.8		85		
		1674	465.0	63		347.1		83		
	C	923	256.3	71		222.6	315	80	4.1	
		1318	366.1	61		262.7		84		
		1582	439.3	56		296.3		82		
CPS400-560N/4		1400	388.9	100	1480	459.5	710	83	5.3	1250
		2000	555.6	95		594.9		87		
		2300	638.9	85		626.6		85		

参数(Para.)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
型号(Type)		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS400-700/4	A	1274	353.9	178	1480	744.3	1120	83	5.4	1720
		1820	505.6	160		911.8		87		
		2184	606.7	147		1028.9		85		
		1197	332.5	157		624.9	1000	82	5.2	
		1710	475.0	141		765.1		86		
		2052	570.0	130		863.6		84		
	B	1121	311.5	138		520.1	900	81	5.0	
		1602	445.0	124		636.5		85		
		1922	534.0	114		718.6		83		
	C	1046	290.5	120		427.1	710	80	4.7	
		1494	415.0	108		522.4		84		
		1793	498.0	99		590.0		82		
CPS400-700M/4		1085	301.4	161	1480	580.3	900	82	4.8	1720
		1550	430.6	144		707.0		86		
		1860	516.7	132		796.2		84		
	A	1020	283.3	142		488.0	710	81	4.6	
		1457	404.7	127		594.1		85		
		1748	485.7	117		669.3		83		
	B	955	265.2	125		405.4	630	80	4.4	
		1364	378.9	112		493.3		84		
		1637	454.7	102		555.8		82		
	C	890	247.1	108		332.1	560	79	4.2	
		1271	353.1	97		403.9		83		
		1525	423.7	89		455.3		81		
CPS400-700N/4		1400	388.9	180	1480	827.1	1250	83	5.4	1720
		2000	555.6	160		1013.6		86		
		2300	638.9	147		1123.2		82		
CPS500-370/4		1890	525.0	37	1480	229.5	280	83	7.8	1600
		2700	750.0	29		242.4		88		
		3240	900.0	25		256.6		86		
	A	1814	504.0	34		205.5	250	82	7.6	
		2592	720.0	27		216.9		87		
		3110	864.0	23		229.7		85		
	B	1739	483.0	31		183.1	220	81	7.4	
		2484	690.0	25		193.1		86		
		2981	828.0	21		204.6		84		
CPS500-370M/4		1575	437.5	32	1480	165.4	220	83	7.0	1600
		2250	625.0	25		176.1		87		
		2700	750.0	22		188.2		86		
	A	1512	420.0	29		148.1	200	82	6.8	
		2160	600.0	23		157.6		86		
		2592	720.0	20		168.4		85		
	B	1449	402.5	27		132.0	160	81	6.6	
		2070	575.0	21		140.4		85		
		2484	690.0	19		150.0		84		
CPS500-370N/4		2100	583.3	35	1480	241.2	280	83	8.2	1450
		3000	833.3	27		256.6		86		
		3300	916.7	24		259.9		83		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS500-440/4		1890	525.0	57	1480	353.6	450	83	7.5	1460
		2700	750.0	43		355.4		89		
		3240	900.0	38		394.6		85		
	A	1814	504.0	53		316.6	400	82	7.4	
		2592	720.0	40		318.0		88		
		3110	864.0	35		353.3		84		
	B	1739	483.0	48		282.1	355	81	7.2	
		2484	690.0	36		283.1		87		
		2981	828.0	32		314.7		83		
	C	1663	462.0	44		250.0	315	80	7.0	
		2376	660.0	33		250.6		86		
		2851	792.0	29		278.7		82		
CPS500-440M/4		1575	437.5	49	1480	256.4	355	82	6.8	1460
		2250	625.0	38		264.7		88		
		2700	750.0	35		306.5		84		
	A	1512	420.0	45		229.6	315	81	6.6	
		2160	600.0	35		236.9		87		
		2592	720.0	32		274.4		83		
	B	1449	402.5	41		204.6	280	80	6.4	
		2070	575.0	32		210.9		86		
		2484	690.0	30		244.5		82		
	C	1386	385.0	38		181.4	250	79	6.2	
		1980	550.0	29		186.7		85		
		2376	660.0	27		216.6		81		
CPS500-440N/4		2100	583.3	57	1480	392.9	450	83	8.0	1460
		3000	833.3	44		413.3		87		
		3300	916.7	38		416.6		82		
CPS500-530/4		1890	525.0	85	1480	514.9	710	85	7.3	1480
		2700	750.0	75		612.9		90		
		3240	900.0	63		646.6		86		
	A	1814	504.0	78		460.9	630	84	7.1	
		2592	720.0	69		548.4		89		
		3110	864.0	58		578.8		85		
	B	1739	483.0	72		410.6	560	83	7.0	
		2484	690.0	63		488.1		88		
		2981	828.0	53		515.5		84		
	C	1663	462.0	66		363.7	500	82	6.8	
		2376	660.0	58		432.1		87		
		2851	792.0	49		456.6		83		
CPS500-530M/4		1575	437.5	76	1480	383.6	560	85	6.5	1480
		2250	625.0	65		442.7		90		
		2700	750.0	57		481.9		87		
	A	1512	420.0	70		343.4	500	84	6.3	
		2160	600.0	60		396.1		89		
		2592	720.0	53		431.3		86		
	B	1449	402.5	64		305.9	450	83	6.2	
		2070	575.0	55		352.5		88		
		2484	690.0	48		384.1		85		
	C	1386	385.0	59		271.0	400	82	6.0	
		1980	550.0	50		312.1		87		
		2376	660.0	44		340.1		84		
CPS500-530N/4		2100	583.3	86	1480	578.8	800	85	7.7	1480
		3000	833.3	76		705.8		88		
		3300	916.7	66		714.8		83		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS500-630/4	A	1890	525.0	143	1480	876.5	1250	84	6.9	2200
		2700	750.0	125		1044.8		88		
		3240	900.0	110		1142.2		85		
		1796	498.8	129		760.5	1120	83	6.6	
		2565	712.5	113		906.1		87		
		3078	855.0	99		991.0		84		
	B	1701	472.5	116		654.6	1000	82	6.4	
		2430	675.0	101		779.4		86		
		2916	810.0	89		852.7		83		
	C	1607	446.3	103		558.2	800	81	6.2	
		2295	637.5	90		664.3		85		
		2754	765.0	79		727.1		82		
CPS500-630M/4	A	1575	437.5	130	1480	672.0	1000	83	6.2	2200
		2250	625.0	110		775.0		87		
		2700	750.0	100		875.6		84		
		1497	415.7	117		583.6	900	82	6.0	
		2138	593.9	99		672.6		86		
		2566	712.7	90		760.3		83		
	B	1418	393.8	105		502.0	710	81	5.8	
		2025	562.5	89		578.3		85		
		2430	675.0	81		653.9		82		
	C	1339	372.0	94		428.5	630	80	5.7	
		1913	531.4	80		493.3		84		
		2296	637.7	72		558.1		81		
CPS500-630N/4		2100	583.3	150	1480	1021.6	1400	84	7.3	2200
		3000	833.3	130		1221.2		87		
		3300	916.7	115		1245.6		83		
CPS500-770/4	A	1890	525.0	221	1480	1370.9	2000	83	6.0	2910
		2700	750.0	200		1690.9		87		
		3240	900.0	182		1889.9		85		
		1777	493.5	195		1152.5	1600	82	5.8	
		2538	705.0	177		1420.7		86		
		3046	846.0	161		1588.4		84		
	B	1663	462.0	171		957.3	1400	81	5.5	
		2376	660.0	155		1179.4		85		
		2851	792.0	141		1318.9		83		
	C	1550	430.5	149		784.2	1250	80	5.3	
		2214	615.0	134		965.6		84		
		2657	738.0	122		1080.1		82		
CPS500-770M/4		1575	437.5	198	1480	1036.0	1600	82	5.3	2910
		2250	625.0	180		1282.9		86		
		2700	750.0	165		1444.8		84		
	A	1481	411.3	175		871.1	1250	81	5.2	
		2115	587.5	159		1078.1		85		
		2538	705.0	146		1214.5		83		
	B	1386	385.0	153		723.7	1120	80	5.0	
		1980	550.0	139		895.1		84		
		2376	660.0	128		1008.6		82		
	C	1292	358.8	133		592.9	900	79	4.8	
		1845	512.5	121		732.9		83		
		2214.00	615.00	111		826.1		81		
CPS500-770N/4		2100	583.3	225	1480	1550.8	2240	83	6.0	2910
		3000	833.3	205		1948.1		86		
		3300	916.7	185		2003.7		83		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS500-870/4		1890	525.0	302	1480	2101.2	2800	74	6.0	3100
		2700	750.0	280		2542.6		81		
		3300	916.7	252		2904.4		78		
CPS500-390/6	A	1421	394.7	16	980	79	110	78	4.0	1450
		2030	563.9	13		83		87		
		2436	676.7	10		81		82		
		1365	379.2	15		71	90	77	3.8	
		1950	541.7	12		74		86		
		2340	650.0	9		73		81		
	B	1309	363.6	14		64	75	76	3.6	
		1870	519.4	11		66		85		
		2244	623.3	8		65		80		
CPS500-390M/6	A	1211	336.4	15	980	64	75	77	3.5	1450
		1730	480.6	12		66		86		
		2076	576.7	9		63		81		
		1162	322.8	14		58	75	76	3.4	
		1660	461.1	11		59		85		
		1992	553.3	8		56		80		
	B	1114	309.6	13		51	75	75	3.2	
		1592	442.2	10		52		84		
		1910	530.7	8		50		79		
CPS500-390N/6	A	1575	437.5	18	980	99	132	78	4.5	1460
		2250	625.0	15		106		87		
		2700	750.0	13		117		82		
		1512	420.0	17		89	110	77	4.3	
		2160	600.0	14		95		86		
		2592	720.0	12		104		81		
	B	1449	402.5	15		79	110	76	4.1	
		2070	575.0	13		84		85		
		2484	690.0	11		93		80		
CPS500-460/6	A	1421	394.7	25	980	115	185	84	5.5	1530
		2030	563.9	23		143		89		
		2436	676.7	18		144		83		
		1365	379.2	23		103	160	83	5.3	
		1950	541.7	21		128		88		
		2340	650.0	17		129		82		
	B	1309	363.6	21		92	132	82	5.0	
		1870	519.4	20		114		87		
		2244	623.3	15		115		81		
	C	1253	348.1	19		82	132	81	4.8	
		1790	497.2	18		101		86		
		2148	596.7	14		102		80		
CPS500-460M/6	A	1211	336.4	23	980	91	132	83	4.8	1530
		1730	480.6	21		112		88		
		2076	576.7	17		117		82		
		1162	322.8	21		82	132	82	4.5	
		1660	461.1	19		101		87		
		1992	553.3	16		105		81		
	B	1114	309.6	19		73	110	81	4.3	
		1592	442.2	18		90		86		
		1910	530.7	14		94		80		
	C	1065	295.9	18		65	90	80	4.2	
		1522	422.8	16		79		85		
		1826	507.3	13		83		79		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS500-460N/4		1575	437.5	26	980	133	200	84	5.8	1260
		2250	625.0	24		167		88		
		2700	750.0	19		168		83		
CPS500-540/6		1421	394.7	40	980	184	250	84	4.4	1530
		2030	563.9	35		215		90		
		2436	676.7	30		234		85		
	A	1365	379.2	37		165	220	83	4.2	
		1950	541.7	32		193		89		
		2340	650.0	28		210		84		
	B	1309	363.6	34		148	200	82	4.0	
		1870	519.4	30		172		88		
		2244	623.3	25		188		83		
	C	1253	348.1	31		131	185	81	3.9	
		1790	497.2	27		153		87		
		2148	596.7	23		167		82		
CPS500-540M/6		1211	336.4	37	980	147	200	83	4.0	1530
		1730	480.6	33		177		88		
		2076	576.7	28		189		84		
	A	1162	322.8	34		132	185	82	3.8	
		1660	461.1	30		158		87		
		1992	553.3	26		169		83		
	B	1114	309.6	31		117	160	81	3.6	
		1592	442.2	28		141		86		
		1910	530.7	24		151		82		
	C	1065	295.9	29		104	160	80	3.5	
		1522	422.8	26		125		85		
		1826	507.3	22		133		81		
CPS500-540N/6		1575	437.5	41	980	209	280	84	4.7	1530
		2250	625.0	36		251		88		
		2700	750.0	30		263		84		
CPS500-660/6		1421	394.7	68	980	317	450	83	4.4	1740
		2030	563.9	59		371		88		
		2436	676.7	53		414		85		
	A	1351	375.3	61		276	400	82	4.0	
		1930	536.1	53		322		87		
		2316	643.3	48		360		84		
	B	1281	355.8	55		238	355	81	3.8	
		1830	508.3	48		278		86		
		2196	610.0	43		311		83		
	C	1211	336.4	49		204	280	80	3.6	
		1730	480.6	43		238		85		
		2076	576.7	38		266		82		
CPS500-660M/6		1211	336.4	60	980	241	355	82	4.0	1740
		1730	480.6	53		287		87		
		2076	576.7	49		330		84		
	A	1151	319.7	54		210	315	81	3.8	
		1644	456.7	48		249		86		
		1973	548.0	44		287		83		
	B	1090	302.8	49		180	250	80	3.6	
		1557	432.5	43		214		85		
		1868	519.0	40		246		82		
	C	1029	285.8	43		154	220	79	3.5	
		1470	408.3	38		182		84		
		1764	490.0	35		210		81		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS500-660N/6		1575	437.5	69	980	357	500	83	4.7	1740
		2250	625.0	58		409		87		
		2700	750.0	48		420		84		
CPS500-830/6		1421	394.7	111	980	524	800	82	4.0	2450
		2030	563.9	100		643		86		
		2436	676.7	91		719		84		
	A	1351	375.3	100		456	710	81	3.9	
		1930	536.1	90		559		85		
		2316	643.3	82		625		83		
	B	1281	355.8	90		394	560	80	3.7	
		1830	508.3	81		482		84		
		2196	610.0	74		540		82		
	C	1211	336.4	81		337	500	79	3.5	
		1730	480.6	73		413		83		
		2076	576.7	66		462		81		
CPS500-830M/6		1211	336.4	100	980	407	630	81	3.5	2450
		1730	480.6	90		499		85		
		2076	576.7	82		559		83		
	A	1151	319.7	90		350	500	81	3.4	
		1644	456.7	81		428		85		
		1973	548.0	74		480		83		
	B	1090	302.8	81		301	450	80	3.2	
		1557	432.5	73		368		84		
		1868	519.0	66		412		82		
	C	1029	285.8	72		256	400	79	3.1	
		1470	408.3	65		314		83		
		1764	490.0	59		351		81		
CPS500-830N/6		1575	437.5	112	980	586	800	82	4.2	2450
		2250	625.0	100		721		85		
		2700	750.0	87		790		81		
CPS600-510/6		2240	622.2	32	980	229	280	86	6.5	1790
		3200	888.9	25		245		89		
		3840	1066.7	20		249		84		
	A	2128	591.1	29		199	250	85	6.3	
		3040	844.4	23		212		88		
		3648	1013.3	18		216		83		
	B	2016	560.0	26		171	220	84	6.0	
		2880	800.0	20		183		87		
		3456	960.0	16		186		82		
CPS600-510M/6		1890	525.0	29	980	173	220	85	5.8	1790
		2700	750.0	23		192		88		
		3240	900.0	19		202		83		
	A	1796	498.8	26		150	200	84	5.6	
		2565	712.5	21		167		87		
		3078	855.0	17		175		82		
	B	1701	472.5	23		129	185	83	5.5	
		2430	675.0	19		143		86		
		2916	810.0	15		151		81		
CPS600-510N/6		2464	684.4	31	980	245	315	85	6.8	1790
		3520	977.8	25		273		88		
		4048	1124.4	20		276		80		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS600-540/6		2240	622.2	38	980	273	355	85	7.3	2246
		3200	888.9	33		320		90		
		3840	1066.7	28		341		86		
	A	2150	597.3	35		244	315	84	7.1	
		3072	853.3	30		286		89		
		3686	1024.0	26		305		85		
	B	2061	572.4	32		218	280	83	7.0	
		2944	817.8	28		255		88		
		3533	981.3	24		272		84		
	C	1971	547.6	29		193	250	82	6.8	
		2816	782.2	26		225		87		
		3379	938.7	22		241		83		
CPS600-540M/6		1890	525.0	32	980	196	280	84	6.4	2246
		2700	750.0	29		240		89		
		3240	900.0	24		249		85		
	A	1814	504.0	29		176	250	83	6.2	
		2592	720.0	27		215		88		
		3110	864.0	22		223		84		
	B	1739	483.0	27		157	220	82	6.0	
		2484	690.0	25		191		87		
		2981	828.0	20		199		83		
	C	1663	462.0	25		139	200	81	5.8	
		2376	660.0	22		169		86		
		2851	792.0	19		176		82		
CPS600-540N/6		2464	684.4	39	980	308	400	85	7.7	2246
		3520	977.8	33		360		88		
		4048	1124.4	27		363		82		
CPS600-640/6		2240	622.2	59	980	424	560	85	5.6	2680
		3200	888.9	48		465		90		
		3840	1066.7	39		492		83		
	A	2150	597.3	54		379	500	84	5.4	
		3072	853.3	44		416		89		
		3686	1024.0	36		440		82		
	B	2061	572.4	50		338	450	83	5.2	
		2944	817.8	41		370		88		
		3533	981.3	33		392		81		
	C	1971	547.6	46		299	400	82	5.0	
		2816	782.2	37		328		87		
		3379	938.7	30		348		80		
CPS600-640M/6		1890	525.0	52	980	327	450	82	5.0	2680
		2700	750.0	43		355		89		
		3240	900.0	36		374		85		
	A	1814	504.0	48		293	400	81	4.8	
		2592	720.0	40		318		88		
		3110	864.0	33		335		84		
	B	1739	483.0	44		261	355	80	4.6	
		2484	690.0	36		283		87		
		2981	828.0	30		298		83		
	C	1663	462.0	40		231	315	79	4.2	
		2376	660.0	33		251		86		
		2851	792.0	28		264		82		
CPS600-640N/6		2464	684.4	59	980	472	630	84	6.2	2680
		3520	977.8	48		523		88		
		4048	1124.4	41		532		85		

参数(Para.)		流量(Q)		扬程(H)	转速(n)	轴功率(Pa)	电机功率	效率	必需汽余量	泵重
型号(Type)		Capacity		Head	Speed	Shaft Power	Motor	Eff.	NPSHr	Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS600-800I6		2240	622.2	87	980	646	900	82	6.0	3250
		3200	888.9	79		774		89		
		3840	1066.7	69		840		86		
	A	2128	591.1	78		561	800	81	5.8	
		3040	844.4	71		671		88		
		3648	1013.3	62		728		85		
	B	2016	560.0	70		483	710	80	5.6	
		2880	800.0	64		577		87		
		3456	960.0	56		627		84		
	C	1904	528.9	63		412	560	79	5.4	
		2720	755.6	57		492		86		
		3264	906.7	50		534		83		
CPS600-800M6		1890	525.0	80	980	502	710	82	5.4	3250
		2700	750.0	70		585		88		
		3240	900.0	62		644		85		
	A	1796	498.8	72		436	630	81	5.2	
		2565	712.5	63		508		87		
		3078	855.0	56		559		84		
	B	1701	472.5	65		375	500	80	5.1	
		2430	675.0	57		437		86		
		2916	810.0	50		481		83		
	C	1607	446.3	58		320	450	79	4.8	
		2295	637.5	51		372		85		
		2754	765.0	45		410		82		
CPS600-800N6		2464	684.4	88	980	712	1000	83	6.3	3250
		3520	977.8	80		872		88		
		4048	1124.4	68		893		84		
CPS600-950I6		2240	622.2	147	980	1081	1600	83	5.2	4000
		3200	888.9	130		1303		87		
		3840	1066.7	120		1495		84		
	A	2106	584.9	130		909	1400	82	5.0	
		3008	835.6	115		1095		86		
		3610	1002.7	106		1257		83		
	B	1971	547.6	114		755	1120	81	4.8	
		2816	782.2	101		909		85		
		3379	938.7	93		1044		82		
	C	1837	510.2	99		618	900	80	4.5	
		2624	728.9	87		744		84		
		3149	874.7	81		855		81		
CPS600-950M6		1890	525.0	129	980	810	1250	82	4.5	4000
		2700	750.0	117		1001		86		
		3240	900.0	107		1138		83		
	A	1777	493.5	114		681	1000	81	4.4	
		2538	705.0	103		841		85		
		3046	846.0	95		957		82		
	B	1663	462.0	100		566	900	80	4.2	
		2376	660.0	91		698		84		
		2851	792.0	83		795		81		
	C	1550	430.5	87		464	710	79	4.1	
		2214	615.0	79		572		83		
		2657	738.0	72		651		80		
CPS600-950N6		2464	684.4	148	980	1183	1800	84	5.5	4000
		3520	977.8	130		1450		86		
		4048	1124.4	120		1634		81		

参数(Para.)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
型号(Type)		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS600-1040/6		2240	622.2	160	980	1177	1800	83	5.2	4500
		3200	888.9	150		1521		86		
		3840	1066.7	139		1732		84		
	A	2106	584.9	141		989	1600	82	5.0	
		3008	835.6	133		1278		85		
		3610	1002.7	123		1456		83		
	B	1971	547.6	124		822	1400	81	4.8	
		2816	782.2	116		1061		84		
		3379	938.7	108		1209		82		
	C	1837	510.2	108		673	1120	80	4.6	
		2624	728.9	101		869		83		
		3149	874.7	93		990		81		
CPS700-480/6		3276	910.0	23	980	250	355	82	7.2	3450
		4680	1300.0	17		249		87		
		5616	1560.0	13		237		84		
	A	3112	864.5	21		217	315	81	7.0	
		4446	1235.0	15		216		86		
		5335	1482.0	12		206		83		
CPS700-480/M/6		2772	770.0	21	980	196	280	81	6.8	4500
		3960	1100.0	15		188		86		
		4752	1320.0	11		170		84		
	A	2633	731.5	19		170	250	80	6.5	
		3762	1045.0	14		163		85		
		4514	1254.0	10		147		83		
CPS700-510/6		3276	910.0	31	980	342	450	81	7.2	3300
		4680	1300.0	25		362		88		
		5616	1560.0	20		373		82		
	A	3145	873.6	29		306	400	80	7.0	
		4493	1248.1	23		324		87		
		5392	1497.7	18		334		81		
	B	3014	837.3	26		273	315	79	6.8	
		4306	1196.1	21		289		86		
		5167	1435.3	17		298		80		
CPS700-510M/6		2772	770.0	27	980	258	315	80	6.4	3300
		3960	1100.0	22		273		87		
		4752	1320.0	18		285		81		
	A	2661	739.3	25		231	280	79	6.2	
		3802	1056.1	20		244		86		
		4562	1267.3	16		255		80		
	B	2551	708.6	23		206	250	78	6.0	
		3644	1012.2	19		218		85		
		4373	1214.7	15		227		79		
CPS700-510/8		2470	686.0	17	740	140	200	82	4.5	3300
		3528	980.0	14		153		88		
		4234	1176.0	12		165		84		
	A	2369	658.0	16		125	185	81	4.3	
		3384	940.0	13		137		87		
		4061	1128.0	11		147		83		
	B	2268	630.0	14		111	160	80	4.2	
		3240	900.0	12		121		86		
		3888	1080.0	10		131		82		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS700-510M/8		2092	581.0	15	740	106	160	81	4.0	3300
		2988	830.0	13		122		87		
		3586	996.0	10		118		83		
	A	2003	556.5	14		94	132	80	3.8	
		2862	795.0	12		108		86		
		3434	954.0	9		105		82		
	B	1928	535.5	13		85	110	79	3.7	
		2754	765.0	11		98		85		
		3305	918.0	8		94		81		
CPS700-590/6		3276	910.0	42	980	452	630	83	6.6	3000
		4680	1300.0	36		505		91		
		5616	1560.0	30		540		85		
	A	3112	864.5	38		392	500	82	6.4	
		4446	1235.0	32		437		90		
		5335	1482.0	27		469		84		
	B	2948	819.0	34		337	450	81	6.2	
		4212	1170.0	29		376		89		
		5054	1404.0	24		403		83		
CPS700-590M/6		2772	770.0	38	980	350	450	82	6.3	3000
		3960	1100.0	32		384		90		
		4752	1320.0	27		411		85		
	A	2633	731.5	34		304	400	81	6.1	
		3762	1045.0	29		333		89		
		4514	1254.0	24		357		84		
	B	2495	693.0	31		262	315	80	5.9	
		3564	990.0	26		286		88		
		4277	1188.0	22		307		83		
CPS700-610/6		3276	910.0	48	980	498	710	86	7.9	3550
		4680	1300.0	43		603		91		
		5616	1560.0	36		648		85		
	A	3145	873.6	44		446	630	85	7.7	
		4493	1248.1	40		539		90		
		5392	1497.7	33		580		84		
	B	3014	837.3	41		397	560	84	7.5	
		4306	1196.1	36		480		89		
		5167	1435.3	30		517		83		
	C	2884	801.1	37		352	500	83	7.3	
		4120	1144.4	33		425		88		
		4944	1373.3	28		458		82		
CPS700-610M/6		2772	770.0	44	980	391	560	85	7.3	3550
		3960	1100.0	38		456		90		
		4752	1320.0	33		509		84		
	A	2661	739.3	41		350	500	84	7.0	
		3802	1056.1	35		408		89		
		4562	1267.3	30		456		83		
	B	2551	708.6	37		312	450	83	6.8	
		3644	1012.2	32		363		88		
		4373	1214.7	28		406		82		
	C	2440	677.6	34		276	355	82	6.5	
		3485	968.1	29		321		87		
		4182	1161.7	26		360		81		

参数(Para.)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
型号(Type)		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS700-640/6		2240	622.2	57	980	419	560	83	5.6	2520
		3200	888.9	50		479		91		
		3840	1066.7	42		500		87		
	A	2150	597.3	53		375	500	82	5.4	
		3072	853.3	46		429		90		
		3686	1024.0	38		448		86		
	B	2061	572.4	48		334	450	81	5.2	
		2944	817.8	42		381		89		
		3533	981.3	35		399		85		
	C	1971	547.6	44		296	400	80	5.1	
		2816	782.2	39		338		88		
		3379	938.7	32		353		84		
CPS700-640M/6		1890	525.0	50	980	314	400	82	5.4	2520
		2700	750.0	44		360		90		
		3240	900.0	37		380		86		
	A	1814	504.0	46		281	355	81	5.1	
		2592	720.0	41		322		89		
		3110	864.0	34		340		85		
	B	1739	483.0	42		251	315	80	4.9	
		2484	690.0	37		286		88		
		2981	828.0	31		303		84		
	C	1663	462.0	39		222	280	79	4.7	
		2376	660.0	34		254		87		
		2851	792.0	29		268		83		
CPS700-720/6		3276	910.0	74	980	759	1120	87	7.0	4100
		4680	1300.0	65		911		91		
		5616	1560.0	54		939		88		
	A	3145	873.6	68		680	900	86	6.8	
		4493	1248.1	60		815		90		
		5392	1497.7	50		841		87		
	B	3014	837.3	63		605	800	85	6.5	
		4306	1196.1	55		725		89		
		5167	1435.3	46		748		86		
	C	2884	801.1	57		537	710	84	6.4	
		4120	1144.4	50		643		88		
		4944	1373.3	42		663		85		
CPS700-720M/6		2772	770.0	64	980	562	800	86	6.3	4100
		3960	1100.0	58		695		90		
		4752	1320.0	48		714		87		
	A	2661	739.3	59		503	710	85	6.1	
		3802	1056.1	53		622		89		
		4562	1267.3	44		640		86		
	B	2551	708.6	54		448	630	84	5.8	
		3644	1012.2	49		554		88		
		4373	1214.7	41		570		85		
	C	2440	677.6	50		397	500	83	5.6	
		3485	968.1	45		490		87		
		4182	1161.7	37		504		84		

参数(Para.)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
型号(Type)		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS700-920/6	A	3276	910.0	115	980	1237	1600	83	7.5	4700
		4680	1300.0	100		1433		89		
		5616	1560.0	86		1530		86		
		3112	864.5	104		1073	1400	82	7.3	
		4446	1235.0	90		1243		88		
		5335	1482.0	78		1328		85		
	B	2948	819.0	93		924	1250	81	7.1	
		4212	1170.0	81		1069		87		
		5054	1404.0	70		1142		84		
	C	2785	773.5	83		788	1120	80	6.9	
		3978	1105.0	72		911		86		
		4774	1326.0	62		974		83		
CPS700-920M/6		2772	770.0	105	980	967	1250	82	6.9	4700
		3960	1100.0	90		1104		88		
		4752	1320.0	78		1188		85		
	A	2633	731.5	95		840	1120	81	6.7	
		3762	1045.0	81		957		87		
		4514	1254.0	70		1031		84		
	B	2495	693.0	85		723	1000	80	6.5	
		3564	990.0	73		823		86		
		4277	1188.0	63		887		83		
	C	2356	654.5	76		617	800	79	6.3	
		3366	935.0	65		702		85		
		4039	1122.0	56		756		82		
CPS700-1080/6		4536	1260.0	192	980	2894	1250	82	6.9	5800
		6480	1800.0	170		3411		88		
		7776	2160.0	150		3739		85		
	A	4400	1222.2	181		2674	1120	81	6.7	
		6286	1746.0	160		3149		87		
		7543	2095.2	141		3453		84		
	B	4180	1161.1	163		2321	1000	80	6.5	
		5971	1658.7	144		2731		86		
		7166	1990.4	127		2997		83		
	C	3762	1045.0	132		1714	800	79	6.3	
		5374	1492.8	117		2015		85		
		6449	1791.4	103		2211		82		
CPS800-530/6		4536	1260.0	29	980	432	560	83	9.0	5350
		6480	1800.0	22		441		88		
		7776	2160.0	16		399		85		
	A	4309	1197.0	26		375	500	82	8.8	
		6156	1710.0	20		383		87		
		7387	2052.0	14		346		84		
CPS800-530M/6		4032	1120.0	26	980	348	450	82	8.4	5350
		5760	1600.0	20		357		88		
		6912	1920.0	13		291		84		
	A	3830	1064.0	23		302	400	81	8.2	
		5472	1520.0	18		309		87		
		6566	1824.0	12		253		83		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS800-590/6		4536	1260.0	37	980	558	710	82	8.0	5100
		6480	1800.0	30		589		90		
		7776	2160.0	25		623		85		
	A	4354	1209.4	34		499	630	81	7.8	
		6220	1727.8	28		526		89		
		7464	2073.3	23		558		84		
	B	4172	1158.9	31		445	560	80	7.6	
		5960	1655.6	25		468		88		
		7152	1986.7	21		497		83		
CPS800-590M/6		4032	1120.0	33	980	448	560	81	7.5	5100
		5760	1600.0	27		476		89		
		6912	1920.0	22		493		84		
	A	3871	1075.3	30		401	500	80	7.3	
		5530	1536.1	25		426		88		
		6636	1843.3	20		442		83		
	B	3710	1030.6	28		358	450	79	7.0	
		5300	1472.2	23		379		87		
		6360	1766.7	19		394		82		
CPS800-650/6		4536	1260.0	52	980	756	1000	85	8.5	5300
		6480	1800.0	45		873		91		
		7776	2160.0	36		919		83		
	A	4354	1209.4	48		677	900	84	8.2	
		6220	1727.8	41		781		90		
		7464	2073.3	33		823		82		
	B	4172	1158.9	44		603	800	83	8.0	
		5960	1655.6	38		695		89		
		7152	1986.7	30		733		81		
	C	3990	1108.3	40		533	710	82	7.5	
		5700	1583.3	35		615		88		
		6840	1900.0	28		649		80		
CPS800-650M/6		4032	1120.0	46	980	602	900	84	7.5	5300
		5760	1600.0	42		732		90		
		6912	1920.0	33		758		82		
	A	3871	1075.3	42		539	800	83	7.2	
		5530	1536.1	39		655		89		
		6636	1843.3	30		679		81		
	B	3710	1030.6	39		480	710	82	7.0	
		5300	1472.2	36		584		88		
		6360	1766.7	28		605		80		
	C	3553	987.0	36		427	630	81	6.8	
		5076	1410.0	33		519		87		
		6091	1692.0	26		538		79		
CPS800-810/6		4536	1260.0	91	980	1308	1800	86	8.5	5600
		6480	1800.0	80		1552		91		
		7776	2160.0	67		1632		87		
	A	4354	1209.4	84		1170	1600	85	8.2	
		6220	1727.8	74		1388		90		
		7464	2073.3	62		1460		86		
	B	4172	1158.9	77		1042	1400	84	8.0	
		5960	1655.6	68		1235		89		
		7152	1986.7	57		1300		85		
	C	3990	1108.3	70		922	1250	83	7.8	
		5700	1583.3	62		1093		88		
		6840	1900.0	52		1150		84		

参数(Para.)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
型号(Type)		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS800-810M/6		4032	1120.0	81	980	1035	1400	86	7.6	5600
		5760	1600.0	72		1242		91		
		6912	1920.0	60		1299		87		
	A	3871	1075.3	75		927	1250	85	7.2	
		5530	1536.1	66		1111		90		
		6636	1843.3	55		1163		86		
	B	3710	1030.6	69		825	1120	84	6.9	
		5300	1472.2	61		989		89		
		6360	1766.7	51		1036		85		
	C	3553	987.0	63		734	1000	83	6.5	
		5076	1410.0	56		879		88		
		6091	1692.0	47		921		84		
CPS800-950/6		4536	1260.0	140	980	2036	2800	85	8.2	6500
		6480	1800.0	120		2354		90		
		7776	2160.0	105		2557		87		
	A	4309	1197.0	126		1766	2500	84	8.0	
		6156	1710.0	108		2041		89		
		7387	2052.0	95		2218		86		
	B	4082	1134.0	113		1520	2000	83	7.8	
		5832	1620.0	97		1755		88		
		6998	1944.0	85		1908		85		
	C	3856	1071.0	101		1296	1800	82	7.6	
		5508	1530.0	87		1496		87		
		6610	1836.0	76		1627		84		
CPS800-950M/6		4032	1120.0	128	980	1674	2240	84	7.5	6500
		5760	1600.0	110		1940		89		
		6912	1920.0	95		2081		86		
	A	3830	1064.0	116		1453	2000	83	7.3	
		5472	1520.0	99		1682		88		
		6566	1824.0	86		1805		85		
	B	3629	1008.0	104		1250	1600	82	7.0	
		5184	1440.0	89		1447		87		
		6221	1728.0	77		1553		84		
	C	3427	952.0	92		1066	1400	81	6.8	
		4896	1360.0	79		1233		86		
		5875	1632.0	69		1324		83		
CPS800-640/8		4536	1260.0	28	740	422	500	82	7.2	5700
		6480	1800.0	22		436		89		
		7776	2160.0	16		399		85		
	A	4354	1209.4	26		378	450	81	7.0	
		6220	1727.8	20		390		88		
		7464	2073.3	15		357		84		
	B	4172	1158.9	24		337	400	80	6.8	
		5960	1655.6	19		347		87		
		7152	1986.7	14		318		83		
CPS800-640M/8		4032	1120.0	26	740	353	400	81	6.9	5700
		5760	1600.0	20		357		88		
		6912	1920.0	14		314		84		
	A	3871	1075.3	24		316	355	80	6.7	
		5530	1536.1	18		319		87		
		6636	1843.3	13		281		83		
	B	3710	1030.6	22		282	355	79	6.5	
		5300	1472.2	17		284		86		
		6360	1766.7	12		251		82		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS800-740/8		4536	1260.0	40	740	582	800	85	7.0	6000
		6480	1800.0	36		699		91		
		7776	2160.0	29		740		83		
	A	4354	1209.4	37		521	710	84	6.8	
		6220	1727.8	33		625		90		
		7464	2073.3	27		663		82		
	B	4172	1158.9	34		463	630	83	6.5	
		5960	1655.6	30		556		89		
		7152	1986.7	25		590		81		
	C	3990	1108.3	31		410	560	82	6.3	
		5700	1583.3	28		492		88		
		6840	1900.0	22		523		80		
CPS800-740M/8		4032	1120.0	37	740	484	710	84	6.4	6000
		5760	1600.0	33		576		90		
		6912	1920.0	27		620		82		
	A	3871	1075.3	34		433	630	83	6.2	
		5530	1536.1	30		515		89		
		6636	1843.3	25		556		81		
	B	3710	1030.6	31		386	560	82	6.0	
		5300	1472.2	28		459		88		
		6360	1766.7	23		495		80		
	C	3553	987.0	29		343	450	81	5.8	
		5076	1410.0	26		407		87		
		6091	1692.0	21		441		79		
CPS800-880/8		4536	1260.0	61	740	887	1250	85	6.5	6600
		6480	1800.0	54		1048		91		
		7776	2160.0	45		1109		86		
	A	4354	1209.4	56		794	1120	84	6.3	
		6220	1727.8	50		937		90		
		7464	2073.3	41		992		85		
	B	4172	1158.9	52		707	1000	83	6.1	
		5960	1655.6	46		834		89		
		7152	1986.7	38		883		84		
	C	3990	1108.3	47		626	900	82	6.0	
		5700	1583.3	42		737		88		
		6840	1900.0	35		782		83		
CPS800-880M/8		4032	1120.0	57	740	746	900	84	5.9	6600
		5760	1600.0	50		872		90		
		6912	1920.0	42		931		85		
	A	3871	1075.3	53		668	800	83	5.7	
		5530	1536.1	46		780		89		
		6636	1843.3	39		833		84		
	B	3710	1030.6	48		595	710	82	5.5	
		5300	1472.2	42		695		88		
		6360	1766.7	36		743		83		
	C	3553	987.0	44		529	630	81	5.3	
		5076	1410.0	39		617		87		
		6091	1692.0	33		660		82		

参数(Para.)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
型号(Type)		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS800-1070/8		4536	1260.0	105	740	1527	2000	85	6.4	9200
		6480	1800.0	90		1786		89		
		7776	2160.0	77		1897		86		
	A	4309	1197.0	95		1325	1800	84	6.2	
		6156	1710.0	81		1548		88		
		7387	2052.0	69		1646		85		
	B	4082	1134.0	85		1140	1600	83	6.0	
		5832	1620.0	73		1332		87		
		6998	1944.0	62		1416		84		
	C	3856	1071.0	76		972	1400	82	5.8	
		5508	1530.0	65		1135		86		
		6610	1836.0	56		1207		83		
CPS800-1070M/8		4032	1120.0	90	740	1177	1600	84	5.8	9200
		5760	1600.0	80		1427		88		
		6912	1920.0	70		1551		85		
	A	3830	1064.0	81		1021	1400	83	5.6	
		5472	1520.0	72		1237		87		
		6566	1824.0	63		1346		84		
	B	3629	1008.0	73		879	1250	82	5.4	
		5184	1440.0	65		1064		86		
		6221	1728.0	57		1158		83		
	C	3427	952.0	65		750	1000	81	5.2	
		4896	1360.0	58		907		85		
		5875	1632.0	51		987		82		
CPS900-720/8		6300	1750.0	31	740	634	800	84	7.2	7500
		9000	2500.0	24		654		90		
		10800	3000.0	19		666		84		
	A	6048	1680.0	29		567	710	83	7.0	
		8640	2400.0	22		585		89		
		10368	2880.0	18		596		83		
	B	5796	1610.0	26		505	630	82	6.8	
		8280	2300.0	20		521		88		
		9936	2760.0	16		531		82		
CPS900-720M/8		5544	1540.0	29	740	528	630	83	6.5	7500
		7920	2200.0	22		533		89		
		9504	2640.0	18		562		83		
	A	5317	1477.0	27		471	560	82	6.3	
		7596	2110.0	20		476		88		
		9115	2532.0	17		502		82		
	B	5116	1421.0	25		425	500	81	6.0	
		7308	2030.0	19		429		87		
		8770	2436.0	15		452		81		
CPS900-800/8		6300	1750.0	44	740	889	1250	85	8.8	6840
		9000	2500.0	38		1024		91		
		10800	3000.0	31		1061		86		
	A	5985	1662.5	40		771	1000	84	8.6	
		8550	2375.0	34		888		90		
		10260	2850.0	28		920		85		
	B	5670	1575.0	36		663	900	83	8.4	
		8100	2250.0	31		763		89		
		9720	2700.0	25		792		84		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS900-800M/8		5544	1540.0	41	740	737	1000	84	7.8	6840
		7920	2200.0	35		830		91		
		9504	2640.0	29		884		85		
	A	5267	1463.0	37		640	900	83	7.5	
		7524	2090.0	32		720		90		
		9029	2508.0	26		767		84		
	B	4990	1386.0	33		551	710	82	7.3	
		7128	1980.0	28		619		89		
		8554	2376.0	23		660		83		
CPS900-880/8		6300	1750.0	55	740	1111	1600	85	8.4	7900
		9000	2500.0	50		1348		91		
		10800	3000.0	43		1507		84		
	A	6048	1680.0	51		994	1400	84	8.2	
		8640	2400.0	46		1205		90		
		10368	2880.0	40		1349		83		
	B	5796	1610.0	47		886	1250	83	8.0	
		8280	2300.0	42		1073		89		
		9936	2760.0	36		1202		82		
	C	5544	1540.0	43		785	1120	82	7.8	
		7920	2200.0	39		950		88		
		9504	2640.0	33		1065		81		
CPS900-880M/8		5544	1540.0	50	740	889	1250	85	7.6	7900
		7920	2200.0	46		1091		91		
		9504	2640.0	39		1188		85		
	A	5317	1477.0	46		793	1120	84	7.4	
		7596	2110.0	42		973		90		
		9115	2532.0	36		1061		84		
	B	5116	1421.0	43		715	1000	83	7.2	
		7308	2030.0	39		876		89		
		8770	2436.0	33		956		83		
	C	4914	1365.0	39		641	900	82	7.0	
		7020	1950.0	36		786		88		
		8424	2340.0	31		858		82		
CPS900-990/8		6300	1750.0	73	740	1474	2000	85	7.8	8700
		9000	2500.0	65		1752		91		
		10800	3000.0	53		1814		86		
	A	6048	1680.0	67		1320	1800	84	6.9	
		8640	2400.0	60		1567		90		
		10368	2880.0	49		1624		85		
	B	5796	1610.0	62		1176	1600	83	6.7	
		8280	2300.0	55		1395		89		
		9936	2760.0	45		1446		84		
	C	5544	1540.0	57		1042	1400	82	6.6	
		7920	2200.0	50		1234		88		
		9504	2640.0	41		1281		83		

参数(Para.)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
型号(Type)		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS900-990M/8		5544	1540.0	65	740	1155	1600	85	6.5	8700
		7920	2200.0	60		1423		91		
		9504	2640.0	48		1445		86		
	A	5317	1477.0	60		1031	1400	84	6.2	
		7596	2110.0	55		1269		90		
		9115	2532.0	44		1290		85		
	B	5116	1421.0	55		929	1400	83	6.0	
		7308	2030.0	51		1143		89		
		8770	2436.0	41		1163		84		
	C	4914	1365.0	51		834	1250	82	5.8	
		7020	1950.0	47		1025		88		
		8424	2340.0	38		1043		83		
CPS900-1190/8		6300	1750.0	123	740	2484	3150	85	7.5	9500
		9000	2500.0	105		2861		90		
		10800	3000.0	90		3044		87		
	A	5985	1662.5	111		2155	2800	84	7.3	
		8550	2375.0	95		2481		89		
		10260	2850.0	81		2641		86		
	B	5670	1575.0	100		1855	2500	83	7.1	
		8100	2250.0	85		2133		88		
		9720	2700.0	73		2272		85		
	C	5355	1487.5	89		1581	2000	82	6.9	
		7650	2125.0	76		1818		87		
		9180	2550.0	65		1936		84		
CPS900-1190M/8		5544	1540.0	112	740	2014	2800	84	6.8	9500
		7920	2200.0	95		2304		89		
		9504	2640.0	80		2409		86		
	A	5267	1463.0	101		1748	2240	83	6.6	
		7524	2090.0	86		1998		88		
		9029	2508.0	72		2090		85		
	B	4990	1386.0	91		1504	2000	82	6.4	
		7128	1980.0	77		1718		87		
		8554	2376.0	65		1798		84		
	C	4712	1309.0	81		1283	1800	81	6.2	
		6732	1870.0	69		1464		86		
		8078	2244.0	58		1533		83		
CPS1000-820/10		8820	2450.0	28	590	792	1000	85	7.0	11000
		12600	3500.0	22		830		91		
		14490	4025.0	18		826		86		
	A	8467	2352.0	26		709	900	84	6.8	
		12096	3360.0	20		743		90		
		13910	3864.0	17		740		85		
	B	8114	2254.0	24		631	800	83	6.6	
		11592	3220.0	19		661		89		
		13331	3703.0	15		659		84		
CPS1000-820M/10		7560	2100.0	26	590	638	800	84	6.5	11000
		10800	3000.0	20		654		90		
		12420	3450.0	16		637		85		
	A	7258	2016.0	24		571	710	83	6.3	
		10368	2880.0	18		585		89		
		11923	3312.0	15		570		84		
	B	6955	1932.0	22		509	630	82	6.2	
		9936	2760.0	17		521		88		
		11426	3174.0	14		508		83		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS1000-940/10		8820	2450.0	41	590	1159	1600	85	7.6	11800
		12600	3500.0	35		1321		91		
		14490	4025.0	30		1377		86		
	A	8379	2327.5	37		1006	1400	84	7.4	
		11970	3325.0	32		1145		90		
		13766	3823.8	27		1195		85		
	B	7938	2205.0	33		866	1120	83	7.2	
		11340	3150.0	28		984		89		
		13041	3622.5	24		1028		84		
CPS1000-940M/10		7560	2100.0	37	590	907	1250	84	7.0	11800
		10800	3000.0	32		1046		90		
		12960	3600.0	26		1106		83		
	A	7182	1995.0	33		787	1000	83	6.8	
		10260	2850.0	29		907		89		
		12312	3420.0	23		960		82		
	B	6804	1890.0	30		678	900	82	6.5	
		9720	2700.0	26		780		88		
		11664	3240.0	21		826		81		
CPS1000-1000/10		8820	2450.0	49	590	1369	2000	86	7.2	12200
		12600	3500.0	45		1698		91		
		14490	4025.0	40		1858		85		
	A	8467	2352.0	45		1226	1800	85	7.0	
		12096	3360.0	41		1519		90		
		13910	3864.0	37		1664		84		
	B	8114	2254.0	41		1092	1600	84	6.8	
		11592	3220.0	38		1352		89		
		13910	3864.0	37		1684		83		
	C	7762	2156.0	38		967	1400	83	6.6	
		11088	3080.0	35		1197		88		
		12751	3542.0	31		1313		82		
CPS1000-1000M/10		7560	2100.0	45	590	1091	1600	85	6.5	12200
		10800	3000.0	41		1341		90		
		12960	3600.0	35		1472		84		
	A	7258	2016.0	41		976	1400	84	6.3	
		10368	2880.0	38		1199		89		
		11923	3312.0	30		1160		83		
	B	6955	1932.0	38		870	1250	83	6.1	
		9936	2760.0	35		1068		88		
		11426	3174.0	27		1033		82		
	C	6653	1848.0	35		770	1120	82	6.0	
		9504	2640.0	32		945		87		
		11405	3168.0	27		1040		81		
CPS1000-1190/10		8820	2450.0	73	590	2040	2800	86	8.8	13000
		12600	3500.0	65		2453		91		
		14490	4025.0	58		2632		87		
	A	8467	2352.0	67		1826	2500	85	8.5	
		12096	3360.0	60		2194		90		
		13910	3864.0	53		2356		86		
	B	8114	2254.0	62		1626	2240	84	8.2	
		11592	3220.0	55		1953		89		
		13331	3703.0	49		2098		85		
	C	7762	2156.0	57		1441	2000	83	8.0	
		11088	3080.0	50		1728		88		
		12751	3542.0	45		1858		84		

参数(Para.)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
型号(Type)		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS1000-1190M/10		7560	2100.0	66	590	1600	2240	85	7.8	13000
		10800	3000.0	58		1897		90		
		12420	3450.0	51		2007		86		
	A	7258	2016.0	61		1432	2000	84	7.5	
		10368	2880.0	53		1697		89		
		11923	3312.0	47		1797		85		
	B	6955	1932.0	56		1276	1800	83	7.3	
		9936	2760.0	49		1510		88		
		11426	3174.0	43		1600		84		
	C	6653	1848.0	51		1130	1600	82	7.1	
		9504	2640.0	45		1337		87		
		10930	3036.0	39		1417		83		
CPS1200-980/12		11340	3150.0	27	495	982	1250	85	6.8	16500
		16200	4500.0	22		1067		91		
		19440	5400.0	17		1047		86		
	A	10886	3024.0	25		879	1120	84	6.6	
		15552	4320.0	20		955		90		
		18662	5184.0	16		937		85		
	B	10433	2898.0	23		783	900	83	6.5	
		14904	4140.0	19		850		89		
		17885	4968.0	14		835		84		
CPS1200-980M/12		10080	2800.0	25	495	798	1000	86	6.4	16500
		14400	4000.0	20		872		90		
		17280	4800.0	15		831		85		
	A	9677	2688.0	23		715	900	85	6.2	
		13824	3840.0	18		780		89		
		16589	4608.0	14		744		84		
	B	9274	2576.0	21		637	800	84	6.1	
		13248	3680.0	17		694		88		
		15898	4416.0	13		663		83		
CPS1200-1080/12		11340	3150.0	37	495	1314	1800	87	7.0	17600
		16200	4500.0	32		1552		91		
		19440	5400.0	26		1602		86		
	A	10773	2992.5	33		1140	1600	86	6.8	
		15390	4275.0	29		1346		90		
		18468	5130.0	23		1389		85		
	B	10206	2835.0	30		981	1400	85	6.6	
		14580	4050.0	26		1157		89		
		17496	4860.0	21		1195		84		
CPS1200-1080M/12		10080	2800.0	35	495	1118	1400	86	6.5	17600
		14400	4000.0	30		1308		90		
		17280	4800.0	24		1330		85		
	A	9576	2660.0	32		970	1250	85	6.3	
		13680	3800.0	27		1134		89		
		16416	4560.0	22		1153		84		
	B	9072	2520.0	28		834	1120	84	6.1	
		12960	3600.0	24		975		88		
		15552	4320.0	19		993		83		

参数(Para.)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
型号(Type)		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS1200-1150/12		11340	3150.0	45	495	1636	2240	85	7.4	19000
		16200	4500.0	40		1940		91		
		19440	5400.0	33		2081		84		
	A	10886	3024.0	41		1465	2000	84	7.2	
		15552	4320.0	37		1736		90		
		18662	5184.0	30		1863		83		
	B	10433	2898.0	38		1305	1800	83	7.0	
		14904	4140.0	34		1545		89		
		17885	4968.0	28		1660		82		
	C	9979	2772.0	35		1156	1600	82	6.8	
		14256	3960.0	31		1367		88		
		17107	4752.0	26		1471		81		
CPS1200-1150M/12		10080	2800.0	42	495	1373	1800	84	6.7	19000
		14400	4000.0	37		1613		90		
		17280	4800.0	31		1759		83		
	A	9677	2688.0	39		1230	1600	83	6.5	
		13824	3840.0	34		1443		89		
		16589	4608.0	29		1575		82		
	B	9274	2576.0	36		1096	1600	82	6.3	
		13248	3680.0	31		1285		88		
		15898	4416.0	26		1403		81		
	C	8870	2464.0	33		971	1250	81	6.1	
		12672	3520.0	29		1137		87		
		15206	4224.0	24		1243		80		
CPS1200-1360/12		11340	3150.0	66	495	2372	3150	86	7.2	20500
		16200	4500.0	58		2814		91		
		19440	5400.0	47		2929		85		
	A	10886	3024.0	61		2123	2800	85	7.0	
		15552	4320.0	53		2517		90		
		18662	5184.0	43		2622		84		
	B	10433	2898.0	56		1891	2500	84	6.8	
		14904	4140.0	49		2240		89		
		17885	4968.0	40		2336		83		
	C	9979	2772.0	51		1675	2240	83	6.6	
		14256	3960.0	45		1983		88		
		17107	4752.0	36		2069		82		
CPS1200-1360M/12		10080	2800.0	62	495	2004	2500	85	6.5	20500
		14400	4000.0	54		2354		90		
		17280	4800.0	43		2410		84		
	A	9677	2688.0	57		1794	2500	84	6.3	
		13824	3840.0	50		2106		89		
		16589	4608.0	40		2158		83		
	B	9274	2576.0	52		1598	2240	83	6.1	
		13248	3680.0	46		1875		88		
		15898	4416.0	36		1923		82		
	C	8870	2464.0	48		1415	1800	82	6.0	
		12672	3520.0	42		1660		87		
		15206	4224.0	33		1703		81		
CPS1400-1150/14		15624	4340.0	29	425	1436	1800	86	7.5	26500
		22320	6200.0	22		1470		91		
		26784	7440.0	18		1546		85		
	A	14994	4165.0	27		1284	1600	85	7.3	
		21420	5950.0	20		1314		90		
		25704	7140.0	17		1382		84		
	B	14364	3990.0	25		1142	1400	84	7.1	
		20520	5700.0	19		1168		89		
		24624	6840.0	15		1230		83		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS1400-1150M/14		13608	3780.0	26	425	1134	1400	85	7.0	26500
		19440	5400.0	20		1177		90		
		23328	6480.0	16		1211		84		
	A	13104	3640.0	24		1025	1250	84	6.8	
		18720	5200.0	19		1063		89		
		22464	6240.0	15		1094		83		
	B	12524	3479.0	22		906	1120	83	6.5	
		17892	4970.0	17		939		88		
		21470	5964.0	14		967		82		
CPS1400-1280/14		15624	4340.0	38	425	1860	2500	87	7.2	25000
		22320	6200.0	33		2182		92		
		26784	7440.0	27		2291		86		
	A	14843	4123.0	34		1613	2240	86	7.0	
		21204	5890.0	30		1891		91		
		25445	7068.0	24		1988		85		
	B	14062	3906.0	31		1388	1800	85	6.8	
		20088	5580.0	27		1626		90		
		24106	6696.0	22		1710		84		
CPS1400-1280M/14		13608	3780.0	35	425	1509	1800	86	6.7	25000
		19440	5400.0	30		1746		91		
		23328	6480.0	24		1795		85		
	A	12928	3591.0	32		1309	1600	85	6.5	
		18468	5130.0	27		1514		90		
		22162	6156.0	22		1557		84		
	B	12247	3402.0	28		1126	1400	84	6.3	
		17496	4860.0	24		1302		89		
		20995	5832.0	19		1340		83		
CPS1400-1360/14		15624	4340.0	47	425	2327	2800	86	7.2	27500
		22320	6200.0	43		2843		92		
		26784	7440.0	36		3020		87		
	A	14994	4165	43		2081	2500	85	7.0	
		21420	5950	40		2540		91		
		25704	7140	33		2700		86		
	B	14364	3990	40		1851	2240	84	6.8	
		20520	5700	36		2258		90		
		24624	6840	30		2402		85		
C	13734	3815	36	1638	2000	83	6.6			
	19620	5450	33	1996		89				
	23544	6540	28	2125		84				
CPS1400-1360M/14		13608	3780.0	43	425	1876	2240	85	6.5	27500
		19440	5400.0	39		2270		91		
		23328	6480.0	33		2439		86		
	A	13104	3640	40		1695	2000	84	6.3	
		18720	5200	36		2050		90		
		22464	6240	31		2204		85		
	B	12524	3479	36		1498	1800	83	6.1	
		17892	4970	33		1810		89		
		21470	5964	28		1947		84		
C	11970	3325	33	1323	1600	82	6.0			
	17100	4750	30	1598		88				
	20520	5700	26	1720		83				

参数(Para.)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
型号(Type)		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS1600-1280/16	A	20916	5810.0	28	370	1878	2240	85	7.5	33000
		29880	8300.0	22		1947		92		
		35856	9960.0	18		2094		84		
		20160	5600.0	26		1701	2000	84	7.3	
		28800	8000.0	20		1763		91		
		34560	9600.0	17		1897		83		
	B	19253	5348.0	24		1500	1800	83	7.1	
		27504	7640.0	19		1552		90		
		33005	9168.0	15		1673		82		
CPS1600-1280M/16	A	18144	5040.0	25	370	1472	1800	84	7.0	33000
		25920	7200.0	20		1552		91		
		31104	8640.0	16		1634		83		
		17426	4840.5	23		1319	1600	83	6.8	
		24894	6915.0	18		1390		90		
		29873	8298.0	15		1465		82		
	B	16695	4637.5	21		1174	1400	82	6.5	
		23850	6625.0	17		1237		89		
		28620	7950.0	14		1304		81		
CPS1600-1490/16	A	20916	5810.0	39	370	2585	3550	86	7.5	34000
		29880	8300.0	33		2921		92		
		35856	9960.0	27		3104		85		
		19883	5523.0	35		2246	2800	85	7.3	
		28404	7890.0	30		2536		91		
		34085	9468.0	24		2698		84		
	B	18824	5229.0	32		1929	2500	84	7.1	
		26892	7470.0	27		2176		90		
		32270	8964.0	22		2317		83		
CPS1600-1490M/16	A	18144	5040.0	35	370	2036	2500	85	7.0	34000
		25920	7200.0	30		2329		91		
		31104	8640.0	24		2422		84		
		17237	4788.0	32		1766	2240	84	6.8	
		24624	6840.0	27		2019		90		
		29549	8208.0	22		2101		83		
	B	16330	4536.0	28		1520	2000	83	6.6	
		23328	6480.0	24		1736		89		
		27994	7776.0	19		1808		82		
CPS1600-1560/16	A	20916	5810.0	46	370	3049	4000	86	7.4	36000
		29880	8300.0	41		3629		92		
		35856	9960.0	34		3908		85		
		20160	5600.0	43		2762	4000	85	7.2	
		28800	8000.0	38		3285		91		
		34560	9600.0	32		3541		84		
	B	19253	5348.0	39		2434	3150	84	7.0	
		27504	7640.0	35		2893		90		
		33005	9168.0	29		3122		83		
	C	18396	5110.0	36		2149	2800	83	6.8	
		26280	7300.0	32		2552		89		
		31536	8760.0	26		2756		82		
CPS1600-1560M/16	A	18144	5040.0	42	370	2443	2800	85	6.7	36000
		25920	7200.0	37		2872		91		
		31104	8640.0	31		3128		84		
		17426	4840.5	39		2190	2500	84	6.5	
		24894	6915.0	34		2572		90		
		29873	8298.0	29		2804		83		
	B	16695	4637.5	36		1949	2240	83	6.3	
		23850	6625.0	31		2288		89		
		28620	7950.0	26		2496		82		
	C	15977	4438.0	33		1729	2000	82	6.0	
		22824	6340.0	29		2028		88		
		27389	7608.0	24		2215		81		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS-X 150-250/2		148	41.1	90.2	2950	50.5	90	72	7	210
		288	80	75		70.9		83		
		346	96	67		78.4		80.5		
	A	120	33.3	78.7		36.3	75	71	6.8	
		274	76	63		58.3		80.5		
		328	91.2	55		62.3		79		
	B	108	30	67.5		32	55	62	6.6	
		261	72.5	52		46.8		79		
		313	87	45		49.9		77		
	C	90	25	57.2		24.2	45	58	6.4	
		234	65	45		36.8		78		
		290	80.6	37		39.2		74.5		
CPS-X 150-250/4		76	21.1	22.5	1480	6.4	11	73	2.4	210
		144	40	18.8		8.9		83		
		173	48.1	17.5		10		81.7		
	A	71	19.7	19.4		5.2	11	72	2.3	
		140	38.8	15.8		7.3		82.5		
		167	46.5	13.6		7.8		79.8		
	B	65	18.1	16.4		4.1	7.5	71	2.2	
		126	35	13.5		5.9		79		
		150	41.7	11.9		6.2		78.6		
	C	60	16.7	14.1		3.3	5.5	70	2.1	
		120	33.3	11.2		4.7		77.5		
		145	40.2	9.5		5		75.5		
CPS-X 150-250M/2		115	31.9	84.8	2950	38	75	70	7.2	210
		245	68	68		55.6		81.5		
		294	81.6	59		59.8		79		
	A	107	29.7	73.2		30.9	55	69	7	
		223	62	59		44.7		79.5		
		268	74.4	51		47.9		77		
	B	99	27.5	63		24.8	45	68.5	6.8	
		205	57	51		36.8		77.5		
		246	68.4	44		38.8		76		
	C	90	25	53.1		19.4	37	67	6.6	
		190	52.8	43		29.3		76		
		227	63	38		31.1		75.5		
CPS-X 150-250M/4		60	16.7	21.2	1480	5	11	70	1.8	210
		122	33.9	17		7		81.5		
		147	40.8	15		7.6		79.5		
	A	56	15.6	18.3		4.1	7.5	69	1.7	
		112	31.2	14.5		5.6		79.5		
		135	37.4	12.7		6		77.2		
	B	52	14.4	15.8		3.3	7.5	68	1.6	
		106	29.4	12.5		4.7		78		
		128	35.5	10.8		5		75		
	C	48	13.3	13.3		2.6	5.5	67	1.5	
		94	26.1	11		3.7		76		
		113	31.4	9.2		3.8		73.8		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS-X 150-310/2		215	59.7	146	2950	116	185	74	10	225
		360	100	123		151		80		
		440	122.2	108		168		77.2		
	A	200	55.3	125		93.3	160	73	8.7	
		335	93	106		121.4		79.6		
		402	111.7	92		131		76.8		
	B	184	51.1	107		74.5	132	72	7.4	
		302	83.9	90		93.5		79.3		
		360	100	78.4		101		76.3		
	C	168	46.7	89		57.4	90	71	6.3	
		227	77	74		70.7		78.3		
		333	92.4	65.5		78.5		75.6		
CPS-X 150-310/4		108	30	36.2	1480	14.4	22	74.2	2.8	225
		185	51.4	31		19.6		80		
		222	61.7	26.2		20.5		77.2		
	A	100	27.8	31.1		11.5	22	73.8	2.5	
		166	46.1	27		15.3		79.6		
		200	55.6	22.8		16.1		77		
	B	92	25.6	26.1		9.2	18.5	72	2.2	
		151	41.9	22.5		11.7		79.3		
		180	50	19.8		12.8		76		
	C	84	23.3	22.1		7	15	72	2	
		140	38.9	18		8.7		78.5		
		162	44.9	16.2		9.4		75.8		
CPS-X 150-310M/2		153	42.5	139	2950	80.5	160	72	8.8	225
		283	78.5	119		117		78		
		340	94.4	105		129		75.5		
	A	140	38.9	119		63.9	132	71	8.6	
		260	72.2	103		93.7		77.6		
		310	86.1	90		101		75.4		
	B	130	36.1	102		50.9	90	71	8.4	
		250	69.3	84		73.8		77.3		
		300	83.3	74		80.5		75		
	C	120	33.3	85.1		39.8	75	70	8	
		234	65	69		57.1		77		
		281	78.1	59.4		61.2		74.4		
CPS-X 150-310M/4		81	22.5	34.4	1480	10.5	18.5	72	2.7	225
		140	38.9	29.5		14.1		78		
		168	46.7	25		15.5		74		
	A	75	20.8	29.5		8.5	15	71	2.6	
		133	37	25.5		11.6		77.6		
		160	44.4	22		12.8		75		
	B	69	19.2	25.1		6.7	11	70	2.5	
		124	34.4	21.2		9		77.3		
		150	41.7	18		9.8		75		
	C	63	17.5	21		5.2	11	69	2.4	
		117	32.5	17		6.9		77		
		140	38.9	15		7.6		76		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS-X 150-375/4		95	26.4	61.8	1480	25	45	64	3	245
		185	51.4	51		33.5		76.5		
		220	61.1	44.2		35.9		73.8		
	A	88	24.4	53		20.2	37	63	2.8	
		167	46.4	46		28.3		74		
		200	55.6	38		29		71.3		
	B	83	23.1	46.7		16.8	30	63	2.7	
		155	43.1	38		22.3		72		
		186	51.7	31		22.8		68.8		
	C	76	21.1	39.1		13.1	22	63	2.5	
		135	37.5	30.3		14.5		69		
		162	45	26		17.3		66.5		
CPS-X 150-375M/4		86	23.9	59.4	1480	22.5	45	62	3.6	245
		162	45	52		31.9		72		
		198	55	45.8		36.6		67.5		
	A	80	22.2	51		17.9	30	62	3.4	
		142	39.4	44		24.7		69		
		170	47.2	38.5		27		66		
	B	75	20.8	45		15.1	30	61	3.2	
		130	36.1	37.5		18.8		66.5		
		157	43.6	32.5		21.7		64		
	C	69	19.2	37.7		11.6	18.5	61	3	
		115	31.9	28.7		14.3		63		
		138	38.3	25		15.4		61.2		
CPS-X 200-230/2		315	87.5	75.2	2950	86.1	132	75	7.5	250
		540	150	60		103		85.5		
		639	177.6	50		105		82.8		
	A	290	80.6	65		69.4	110	74	7.2	
		490	136.1	52		82.1		84		
		585	163.2	43.5		84.4		82.5		
	B	270	75	55.1		55.5	75	73	6.9	
		454	126	43.5		65.1		82		
		540	150	35		66		78		
	C	248	68.9	46.5		44.3	75	71	6.6	
		425	118	34		50.8		77		
		486	135	29.4		52.3		74.5		
CPS-X 200-230/4		147	40.8	19.1	1480	10.4	18.5	73.8	1.9	250
		274	76.1	14.8		12.9		85.5		
		328	91.1	12		13.1		82		
	A	137	38.1	16.8		9	15	70	1.8	
		241	66.9	13.2		10.3		84.5		
		290	80.5	10.8		10.4		82		
	B	126	35	14.5		7.5	15	66	1.7	
		230	63.9	10.6		8.1		82.5		
		277	76.9	8.5		8.2		77.8		
	C	115	31.9	11.8		6.2	11	60	1.6	
		209	58.1	8.7		6.4		77.5		
		250	69.4	6.8		6.2		74.7		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS-X 200-230M/2		288	80	75	2950	77.4	110	76	8.4	250
		468	130	61		92		84.5		
		566	157.2	55		102		83.6		
	A	268	74.4	64.9		63.2	90	75	8.2	
		436	121	53		74.8		84		
		523	145.2	44		77.2		81.2		
	B	246	68.3	55		49.8	75	74	8.1	
		410	114	45		61.3		82		
		493	136.7	37		63.3		78.4		
	C	226	62.8	46.2		38.9	75	73	8	
		382	106	37		49.9		77		
		458	127.2	30		49.9		75		
CPS-X 200-230M/4		137	38.1	19.1	1480	9.6	15	74	2.8	250
		238	66.1	15.1		11.6		84.5		
		307	85.3	11.5		12		80		
	A	127	35.3	16.5		7.8	15	73	2.7	
		212	58.9	13.5		9.3		84		
		255	70.8	11.4		9.7		82		
	B	117	32.5	14		6.2	11	72	2.6	
		205	56.9	11.5		7.8		82		
		246	68.4	9.2		7.9		78		
	C	107	29.7	11.8		4.8	7.5	72	2.5	
		193	54.2	9.1		6.2		78		
		223	61.9	7.7		6.3		74		
CPS-X 200-300/2		380	105.6	120	2950	155	220	80	8.8	275
		535	148.5	108		187		84		
		642	178.3	95		202		82.3		
	A	348	96.7	100		120	160	79	8.2	
		497	138	88		145		82		
		596	165.6	75		153		79.5		
	B	320	88.9	84.5		97	132	76	8	
		454	126	72		111		80		
		540	150	62		116		78.8		
	C	300	83.3	70		76.3	110	75	7.5	
		403	112	57		80.2		78		
		484	134.4	47		80.5		77		
CPS-X 200-300/4		139	38.6	32	1480	16.4	30	74	1.9	275
		270	75	27		23.6		84		
		323	89.7	23.3		25.2		81.4		
	A	127	35.3	27		13	22	72	1.8	
		243	67.5	22		17.8		82		
		292	81.1	19.6		19.5		80		
	B	117	32.5	22.6		10.4	18.5	70	1.7	
		223	61.9	18		13.7		80		
		268	74.4	15.5		14.4		78.3		
	C	107	29.7	18.6		8	15	68	1.6	
		202	56.1	14.2		10		78		
		242	67.2	11.7		10.1		76.4		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS-X 200-300M/2		270	75	123	2950	122.3	200	74	8.2	275
		480	133.3	100		157		83		
		576	160	85.5		166		80.6		
	A	245	68.1	102		93.3	160	73	7.8	
		436	121	83.5		122		81		
		523	145.2	70		126		79		
	B	228	63.3	83.5		72.1	110	72	7.6	
		385	107	70		93		79		
		462	128.3	60		97		77.8		
	C	208	57.8	67.5		53.9	90	71	7.4	
		342	95	55		67.4		76		
		410	114	47		71		74		
CPS-X 200-300M/4		134	37.2	30.5	1480	15.1	30	74	2.5	275
		241	66.9	25		19.8		83		
		290	80.6	21.3		20.6		80		
	A	120	33.3	25.6		11.6	18.5	72	2.4	
		218	60.6	21		15.2		82		
		261	72.5	17.5		16		78		
	B	110	30.6	21.2		8.8	15	72	2.3	
		196	54.4	17.5		11.8		79		
		234	65	14.8		12.3		77		
	C	100	27.8	16.7		6.4	11	71	2.2	
		173	48.1	13.7		8.5		76		
		207	57.5	11.3		8.6		74		
CPS-X 200-365/4		167	46.4	52	1480	32	75	74	3	300
		310	86	47		47.2		84		
		360	100	43.8		52.3		82.2		
	A	153	42.5	44		25.5	45	72	2.9	
		281	78	39		36		83		
		337	93.6	35.6		40.4		81.2		
	B	140	38.9	35.9		19.3	37	71	2.8	
		256	71	31.5		26.8		82		
		307	85.2	28.2		29.8		79.5		
	C	125	34.7	36.2		17.6	30	70	2.7	
		230	64	24		18.8		80		
		278	76.8	20.9		20.6		77		
CPS-X 200-365M/4		154	42.8	48.6	1480	27.9	55	73	2.3	300
		277	77	43		40.1		81		
		333	92.4	38.8		44		80		
	A	140	38.9	42.1		20.6	45	72	2.2	
		252	70	37		31.8		80		
		302	84	32.8		34.2		79		
	B	128	35.6	34.8		17.1	30	71	2.1	
		227	63	30.5		24.5		78.5		
		272	75.6	27.5		26.8		76		
	C	115	31.9	28.1		12.6	22	70	2	
		198	55	24.5		17.4		78		
		238	66	21.8		18.8		75.2		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS-X 200-500/4		180	50	84.4	1480	55.9	110	74	2.4	335
		330	92	76		83.3		82		
		396	110	70		96.6		78.2		
	A	168	46.7	73.1		45.8	90	73	2.2	
		292	81	66.5		67.3		80		
		342	95	62		74.8		77.2		
	B	155	43.1	62.3		36.5	75	72	2	
		256	71	56		50.6		77		
		307	85.2	51.5		56.6		76		
	C	143	39.7	52.6		29.3	55	70	1.8	
		230	64	47		38.8		76.5		
		252	70	44.3		41.6		73.2		
CPS-X 200-500M/4		160	44.4	79	1480	47.8	90	72	2.5	335
		293	81.5	69.5		69.5		80		
		352	97.8	63		78.5		77		
	A	150	41.7	68.3		39.3	75	71	2.3	
		272	75.5	60.5		57.5		78		
		326	90.6	55		64.3		76		
	B	138	38.3	59.1		31.7	55	70	2.1	
		227	63	53		42.5		77		
		272	75.6	48.3		47.3		75.8		
	C	128	35.6	50		25.3	45	69	2	335
		202	56	45		32.5		76		
		234	65	40		34.5		74		
CPS-X 200-290/4		260	72.2	26.8	1480	25	37	76	2.5	350
		443	123	21		29.5		86		
		531	147.5	17.5		30.9		82		
	A	240	66.7	23.2		20.2	30	75	2.4	
		403	112	18.4		23.7		85.4		
		484	134.4	15.4		24.7		82.3		
	B	220	61.1	19.4		15.7	22	74	2.3	
		378	105	15		18.7		82.5		
		454	126	12.3		19.1		79.4		
	C	204	56.7	16.2		12.5	18.5	72	2.2	
		350	97.2	11.5		14.2		77		
		396	110	9.8		13.9		76		
CPS-X 200-290M/4		234	65	25.5	1480	21.4	30	76	2.5	350
		396	110	20.2		25.3		86		
		475	132	16.6		25.7		83.5		
	A	218	60.6	22.4		18	30	74	2.4	
		378	105	17		20.6		85		
		454	126	14		21.2		81.6		
	B	200	55.6	19.4		16.3	22	73	2.3	
		353	98	14.5		16.7		83.4		
		432	117.5	11.3		16.5		79		
	C	184	51.1	16.3		11.5	18.5	71	2.2	
		331	92	11.6		13.1		80		
		378	105	9.6		13		76		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS-X 200-360/4		245	68.1	44.5	1480	39.1	75	76	2.5	360
		446	124	38		54.3		85		
		525	146	34		58.9		82.7		
	A	225	62.5	37.4		31	55	74	2.4	
		403	112	31		41		83		
		484	134.4	26.3		42.9		80.8		
	B	206	57.2	32.1		24.7	45	73	2.3	
		370	102.8	25		31.2		81		
		445	123.6	21		32.3		78.8		
	C	189	52.5	26.4		18.9	37	72	2.2	
		331	92	20		23.1		78		
		396	110	16.2		22.7		77		
CPS-X 200-360M/4		225	62.5	43.1	1480	35.7	55	74	2.5	360
		407	113	35		46.2		84		
		488	135.6	30		49.3		81		
	A	206	57.2	36.2		28.2	45	72	2.3	
		367	102	29.5		36		82		
		440	122.2	25		37.5		80		
	B	190	52.8	30.6		22.3	37	71	2.1	
		334	92.8	25		28.5		80		
		400	111.1	21.3		29.8		78		
	C	175	48.6	24.5		16.7	30	70	2	
		292	81.1	20.5		20.9		78		
		350	97.2	17.5		22		76		
CPS-X 200-460/4		282	78.3	74.8	1480	79.8	132	72	3.5	440
		515	143.1	66		113		82		
		612	170	59.6		125		79.5		
	A	258	71.7	62.4		61.8	110	71	3.3	
		472	131.1	54.5		86.4		81		
		566	157.2	47.8		95		77.6		
	B	235	65.3	51.6		47.2	75	70	3.2	
		432	120	43.5		64		80		
		516	143.3	37		69.7		75		
	C	210	58.3	42.1		35.4	55	68	3	
		396	110	35		48.1		78.5		
		475	132	28.2		50.7		72		
CPS-X 200-460M/4		223	61.9	70	1480	60.8	110	70	3.5	440
		440	122.2	60		88.6		81		
		527	146.4	53.5		97.6		78.7		
	A	204	56.7	58.2		46.9	90	69	3.3	
		396	110	50		67		80.5		
		484	134.4	44.5		75.2		78		
	B	185	51.4	48.2		36.3	75	67	3.1	
		375	104	40		51		80		
		450	125	34.5		57.1		74		
	C	166	46.1	38.6		26.9	45	65	2.8	
		324	90	33		37.3		78		
		390	108	28.4		41.9		72		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS-X 200-605/4		297	82.5	117	1480	135	250	70	3.8	650
		583	161.9	105		206		81		
		700	194.4	95.5		233		78		
	A	277	76.9	103		113	200	69	3.6	
		550	152.7	88.5		167		79.5		
		648	180	81		188		76.3		
	B	258	71.7	88		91	160	68	3.4	
		515	143	75		135		78		
		605	168	68		151		74		
	C	238	66.1	74.8		72.4	132	67	3.2	
		472	131.1	61.5		103		77		
		526	146.1	55.2		110		72		
CPS-X 200-605M/4		295	81.9	106	1480	118	200	72	4.6	650
		536	148.9	90		166		79		
		617	171.4	82		182		76		
	A	276	76.7	93		98.5	160	71	4.3	
		490	136.1	78		133		78		
		576	160	70		148		74.2		
	B	256	71.1	80.4		80.1	132	70	4	
		446	124	68.5		108		77		
		535	148.8	60		118		74		
	C	235	65.3	67.3		63.4	110	68	3.8	
		403	112	57.5		83.1		76		
		484	134.4	50		91.6		72		
CPS-X 250-320/4		425	118	37.2	1480	55.2	75	78	3.8	450
		690	192	30		64.8		87		
		834	231.7	25		67.2		84.5		
	A	395	109.7	32.6		46.2	75	76	3.6	
		648	180	25.5		52		86.5		
		778	216	21.3		54		83.5		
	B	364	101.1	28		37	55	75	3.4	
		601	167	21.3		41		85		
		720	200	17.2		42.3		80		
	C	334	92.8	22.5		26.7	37	74	3.2	
		550	152.8	17		32.3		79		
		612	170	15.3		32.9		77.5		
CPS-X 250-320M/4		375	104.2	34.6	1480	45.3	75	78	3.1	450
		637	176.9	28		56.2		86.5		
		765	212.5	23.4		58		84		
	A	348	96.7	31.4		39.2	55	76	2.9	
		594	165	24.5		46.1		86		
		713	198	20		46.9		82.9		
	B	320	88.9	27.2		32.1	45	74	2.7	
		558	155	21		38		84		
		670	186	17.2		38.4		81.8		
	C	295	81.9	22.5		24.8	37	73	2.6	
		515	143.1	17		29.1		82		
		595	165.3	14.2		29.5		78		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS-X 250-420/4		428	119	60	1480	89.7	160	78	3.9	520
		709	197	52		117		86		
		850	236.1	47		129		84.5		
	A	390	108.3	51		71.3	110	76	3.7	
		630	175	42.5		86.3		84.5		
		756	210	37.5		93.1		83		
	B	360	100	42.8		56.7	90	74	3.4	
		572	159	35.5		66.7		83		
		687	190.8	30		68.8		81.6		
	C	330	91.7	35.3		43.5	75	73	3.2	
		511	142	27.5		49		81		
		613	170	24		50.1		80		
CPS-X 250-420M/4		365	101.4	58.3	1480	76.3	132	76	3.2	520
		648	180	48		98.6		86		
		778	216	42		107		83.5		
	A	335	93.1	49.4		61.8	90	73	3.1	
		583	162	40.5		76.6		84		
		700	195	35		81.7		82		
	B	308	85.6	42		49.6	75	71	3	
		530	147	34.5		60.6		82		
		635	176	29		62.6		80.2		
	C	280	77.8	34.3		37.4	55	70	2.8	
		468	130	28		44.9		79.5		
		562	156	24		47.7		77		
CPS-X300-370/4		620	172.2	47.7	1480	106	160	76	4.6	670
		1051	292	39		127		88		
		1260	350	33.5		137		84		
	A	575	159.7	42		88.9	132	74	4.5	
		994	276.1	33		104		86		
		1192	331.2	27.7		109		82.3		
	B	530	147.2	35.4		71	110	72	4.4	
		943	261.9	27		83.6		83		
		1131	314.4	21		83.6		77.5		
	C	487	135.3	29.4		55.7	75	70	4.3	
		871	242	20		61.2		77.5		
		1008	280	16		58.6		75		
CPS-X300-370M/4		585	162.5	46.8	1480	98.2	160	76	4	670
		1029	286	37		119		87		
		1235	343	31		124		84.3		
	A	544	151.1	41		82.1	132	74	3.9	
		968	268.9	32		98.1		86		
		1162	322.8	27		104		82.5		
	B	500	138.9	36		67.2	110	73	3.8	
		914	253.9	27		80		84		
		1097	304.8	22		82.2		80		
	C	460	127.8	30.4		53.7	75	71	3.7	
		850	236.1	22		62.1		82		
		1020	283.3	17		62.2		76		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS-X 300-480/4		648	180	79.5	1480	182	315	77	3.9	830
		1173	326	66		239		88		
		1440	400	57.2		263		85.4		
	A	594	165	66.2		143	280	75	3.8	
		1080	300	55		188		86		
		1296	360	47.5		202		83		
	B	546	151.7	55.8		114	200	73	3.7	
		1000	278	45.5		149		83		
		1200	333.6	38		160		77.6		
	C	500	138.9	47.4		89.7	160	72	3.6	
		929	258	37.5		119		80		
		1115	309.6	32		126		77		
CPS-X 300-480M/4		520	144.4	71.9	1480	138	220	74	3.6	830
		1044	290	55.5		185		85.5		
		1296	360	45.3		195		82		
	A	476	132.2	61.7		111	200	72	3.4	
		976	271	47		149		84		
		1156	321.1	40		156		81		
	B	438	121.7	52.4		88	160	71	3.2	
		886	246.1	40		118		82		
		1063	295.2	34		126		78		
	C	400	111.1	45.1		70.2	132	70	3	
		803	223	34.5		96.1		78.5		
		963	267.5	28.5		98.4		76		
CPS-X 300-600/4		800	222.2	130	1480	361	560	78.6	4	1220
		1242	345	116		467		84		
		1490	413.9	105		520		82		
	A	750	208.3	115		306	450	76.8	3.7	
		1152	320	100		376		83.5		
		1400	388.9	90		421		81.5		
	B	700	194.4	95		238	355	76	3.4	
		1080	300	83		294		83		
		1296	360	73.5		320		81		
	C	650	180.6	78		182	280	75.8	3.1	
		1000	277.8	66		218		82.5		
		1170	325	60		238		80.5		
CPS-X 300-600M/4		540	150	123	1480	251	450	72	3.9	1220
		1080	300	103		365		83		
		1253	348	91.5		381		82		
	A	500	138.9	106		203	355	71	3.5	
		965	268.1	90		287		82.5		
		1158	321.6	80		311		81.3		
	B	460	127.8	90.4		164	250	69	3.1	
		875	243.1	74.5		218		81.5		
		1050	291.7	66		235		80.3		
	C	420	116.7	67.5		126	200	68	2.8	
		800	222.2	62		168		80.5		
		960	266.7	56.5		186		79.5		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS-X 350-300/4		684	190	31.2	1480	78.6	110	74	4.8	630
		1098	305	24.5		84.7		86.5		
		1318	366	20		87.1		82.4		
	A	638	177.2	7.4		66.2	90	72	4.6	
		1044	290	19.8		66.6		84.5		
		1253	348	15		63.2		81		
	B	595	165.3	22.6		50.9	75	72	4.4	
		1008	280	15.5		51.9		82		
		1210	336	11.4		48.2		78		
	C	540	150	18.8		39	45	71	4.2	
		965	268	11.5		38.8		78		
		1158	322	7.5		32		74		
CPS-X 350-300M/4		560	155.6	29.4	1480	60.6	90	74	3.6	630
		936	260	23		69		85		
		1152	320	17.8		68.2		82		
	A	520	144.4	26.2		51.6	75	72	3.5	
		864	240	20		56.5		83.4		
		1037	288	15.8		55.1		81		
	B	487	135.3	22.4		41.3	55	72	3.4	
		800	222	16.9		45.5		81		
		960	267	13.5		44.8		79		
	C	440	122.2	19.2		32.4	45	71	3.3	
		700	194	15		37.1		77		
		840	233	12		36.1		76		
CPS-X 400-435/4		1000	278	64.2	1480	224	315	78	4.3	910
		1677	466	53		275		89		
		2012	559	46		295		85.5		
	A	930	258.3	56.8		189	280	76	4.2	
		1577	438	45		223		86.5		
		1892	526	37.5		230		84		
	B	858	238.3	47.2		147	200	75	4.1	
		1476	410	36.5		175		84		
		1771	492	28.5		172		80		
	C	786	218.3	39.2		113	160	74	4	
		1360	378	27.5		129		79		
		1530	425	23.5		127		77.3		
CPS-X 400-435M/4		920	255.6	64.8	1480	214	315	76	6	910
		1620	450	51.5		260		88		
		1944	540	43.5		273		84.5		
	A	855	237.5	56.2		177	250	74	5.7	
		1519	422	45		215		86.5		
		1823	506	37.5		222		84		
	B	790	219.4	48.2		142	220	73	5.4	
		1422	395	37.5		173		84		
		1706	474	30		174		80		
	C	724	201.1	40		111	160	71	5.2	
		1332	370	30		134		81.2		
		1598	444	24.5		138		77.5		

参数(Para.) 型号(Type)		流量(Q) Capacity		扬程(H) Head	转速(n) Speed	轴功率(Pa) Shaft Power	电机功率 Motor	效率 Eff.	必需汽余量 NPSHr	泵重 Pump Weight
		(m³/h)	(l/s)	(m)	(r/min)	(kW)	(kW)	(%)	(m)	(kg)
CPS-X 400-360/4		1100	305.6	41.6	1480	113	200	74	6.6	870
		1728	480	32		175		86		
		2088	580	25		173		82.3		
	A	1030	286.1	36		138	160	73	6.5	
		1692	470	26.5		144		84.8		
		2030	564	20		138		80		
	B	950	263.9	31.2		112	132	72	6.4	
		1641	456	21		114		82.4		
		1969	547	15		105		76.7		
	C	890	247.2	25.4		87	110	71	6.3	
		1602	445	15		81.8		80		
		1922	534	9		64.6		73		
CPS-X 400-360M/4		864	240	38.6	1480	123	160	74	5.8	870
		1440	400	30.5		141		85		
		1706	474	25.8		144		83.3		
	A	810	225	34		103	132	73	5.6	
		1335	371	26.3		114		84		
		1602	445	21.3		115		81		
	B	750	208.3	29.2		83	110	72	5.4	
		1270	353	22.5		95		82		
		1524	423	17.5		93		78		
	C	715	198.6	24.8		68	90	71	5.2	
		1188	330	17.8		74		78		
		1397	388	13.7		71		74		
CPS-X 400-510/4		1620	450	85	1480	481	710	78	6.5	1400
		2610	725	70		569		87.5		
		3132	870	60		605		84.7		
	A	1500	416.7	74.2		394	560	77	6.4	
		2430	675	60		456		87		
		2916	810	50		476		83.5		
	B	1390	386.1	63.6		317	450	76	6.3	
		2232	620	50		358		85		
		2700	750	40		364		81		
	C	1280	355.6	50.4		234	315	75	6.2	
		2070	575	38		271		79		
		2484	690	30		264		77		
CPS-X 400-510M/4		1350	375	84	1480	407	630	76	6.8	1400
		2448	680	67		510		87.5		
		2938	816	57		531		85.3		
	A	1250	347.2	74.8		344	500	74	6.6	
		2268	630	59.5		422		87		
		2722	756	50		436		85		
	B	1150	319.4	64.2		276	400	73	6.4	
		2088	580	50		335		85		
		2506	696	41.5		344		82.5		
	C	1050	291.7	54.3		216	315	72	6.2	
		1944	540	41.5		265		83		
		2333	648	34.5		274		80		