

DC Variable Speed Pumps



VSD-A Series

DC Return Pump

DC循环泵



Energy Saving



Safe Voltage



Small Body



Low Noise



Features 产品特点:

- | | |
|--------------------|---|
| 01 体积小，动力强 | 01 Small size but strong power |
| 02 可调和不可调流型选项 | 02 Options for adjustable and non adjustable flow styles |
| 03 具有造波功能 | 03 With wave making function |
| 04 淡水和海水使用 | 04 Fresh water and sea water use |
| 05 正弦波控制，超静音 | 05 Sine wave control, super quiet |
| 06 直流低压节能，更安全 | 06 DC low-voltage energy-saving, much safer |
| 07 稳定，故障率低 | 07 Stable, low failure rate |
| 08 顶部、底部和侧面都能吸水 | 08 The top, bottom and side can absorb water |
| 08 前盖可以以任何90度旋转和组装 | 09 The front cover can be rotated and assembled at any 90 degrees |
| 10 能吮吸鱼粪 | 10 Capable of sucking fish feces |


Model No.	Power (W)	Voltage (V)	F.MAX (L/H)	H.MAX (M)	Product Size (MM)	Outlet (mm)	Pcs/ Carton
VSD-500RA	4w	DC5V	500	1.2	82x43x89	12mm/16mm	64
VSD-700RA	9w	DC12V	700	2.0	82x43x89	12mm/16mm	64
VSD-700A	9w	DC12V	700	2.0	82x43x89	12mm/16mm	64
VSD-1200A	12w	DC12V	1200	2.0	117x50x105	16mm/20mm	16
VSD-1800A	24w	DC24V	1800	2.0	117x50x105	16mm/20mm	16
VSD-2500A	28w	DC24V	2500	3.0	136.5x61x122	20mm/25mm	16
VSD-3500A	36w	DC24V	3500	3.5	136.5x61x122	20mm/25mm	8
VSD-4500A	48w	DC24V	4500	4.0	174x73x146	25mm/32mm	8
VSD-6000A	72w	DC24V	6000	5.0	174x73x146	25mm/32mm	8
VSD-8000A	80w	DC24V	8000	5.0	174x73x146	25mm/32mm	8
VSD-10000A	96w	DC24V	10000	4.5	205x86x172	32mm/40mm	8
VSD-12000A	105w	DC24V	12000	5.0	205x86x172	32mm/40mm	8
VOLTAGE:110-240V DC VOLTAGE:5V/12V/24V FREQUENGY:50/60Hz							



VSD-B Series

DC Bottom Suction Pump

DC底吸泵

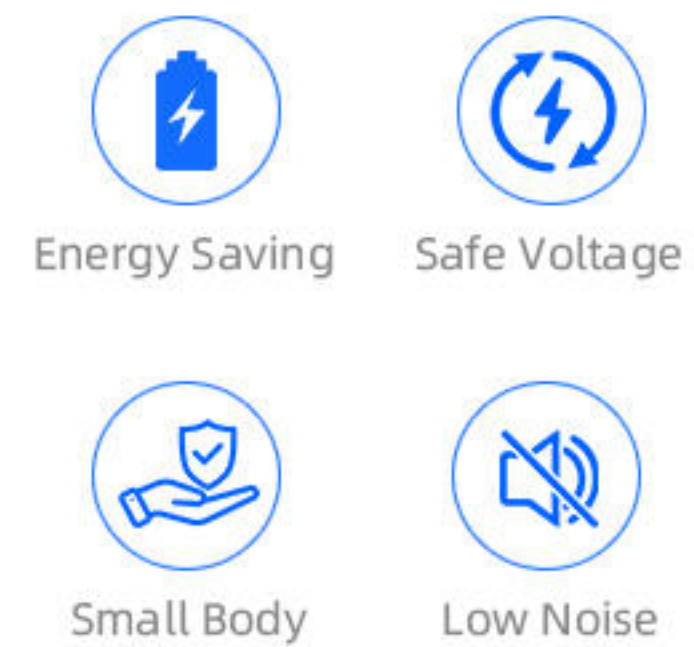

Features 产品特点:

- | | |
|----------------------------|--|
| 01 体积小，但动力强 | 01 Small size but strong power |
| 02 可调节(10-20档)和不可调节流量样式的选项 | 02 Options for adjustable(10-20Gears) and non adjustable flow styles |
| 03 具有造浪和喂食模式 | 03 With Wave making and Feeding Mode |
| 04 淡水和海水使用 | 04 Fresh water and Sea water use |
| 05 正弦波控制，超静音 | 05 Sine wave control, super quiet |
| 06 直流低压节能，更安全 | 06 DC Low-voltage Energy-saving, much Safer |
| 07 稳定，故障率低 | 07 Stable, low failure rate |
| 08 360度周边吸水 | 08 360 degree Surrounding suction water |
| 08 吸入水位低至1CM | 09 Suction water level as low as 1CM |
| 10 能吸鱼粪 | 10 Capable of sucking fish feces |

Model No.	Power (W)	Voltage (V)	F.MAX (L/H)	H.MAX (M)	Product Size (MM)	Outlet (mm)	Pcs/ Carton
VSD-500RB	4w	DC5V	500	1.2	55x55x115	12mm/16mm	30
VSD-700RB	9w	DC12V	700	1.5	55x55x115	12mm/16mm	30
VSD-700B	9w	DC12V	700	1.5	55x55x115	12mm/16mm	30
VSD-1200B	12w	DC12V	1200	2.0	63x63x144	16mm/20mm	12
VSD-1800B	24w	DC24V	1800	3.0	63x63x144	16mm/20mm	12
VSD-2500B	28w	DC24V	2500	3.0	75x74x170	20mm/25mm	12
VSD-3500B	36w	DC24V	3500	3.5	75x74x170	20mm/25mm	12
VSD-4500B	48w	DC24V	4500	4.0	87x86x210	25mm/32mm	12
VSD-6000B	72w	DC24V	6000	5.0	87x86x210	25mm/32mm	12
VSD-8000B	80w	DC24V	8000	5.0	87x86x210	25mm/32mm	12
VSD-10000B	96w	DC24V	10000	4.5	105x100x246	32mm/40mm	6
VSD-12000B	105w	DC24V	12000	5.0	105x100x246	32mm/40mm	6
VOLTAGE:110-240V DC VOLTAGE:5V/12V/24V FREQUENGY:50/60Hz							



VSD-C Series

DC Wavemaker

DC 造浪泵



Energy Saving



Safe Voltage



Small Body



Low Noise



Features 产品特点:

- | | |
|---------------------------|--|
| 01 体积小，但波流强 | 01 Small size but strong wave flow |
| 02 4波模式(恒定、脉冲、陀螺、随机)和喂食功能 | 02 4 wave mode(Constant,Pulse,Gyre,Random) and feed function |
| 03 20档，带显示屏 | 03 20 gears,with Display screen |
| 04 波频率和强度周期调整 | 04 Wave Frequency and Intensity Cycle adjustment |
| 05 正弦波控制，超静音 | 05 Sine wave control, super quiet |
| 06 直流低压节能，更安全 | 06 DC low-voltage energy-saving, much safer |
| 07 稳定，故障率低 | 07 Stable, low failure rate |
| 08 用于淡水和海水 | 08 For Fresh water and sea water use |
| 09 易于拆卸 | 09 Detach easily |

Model No.	Power (W)	Voltage (V)	F.MAX (L/H)	Product Size (MM)	Tank Size (cm)	Pcs/ Carton
VSD-6000C	9W	DC12V	6000	47.8x47.8x52.5	<60cm	16
VSD-10000C	20w	DC24V	10000	62x62x66	<80cm	16
VSD-15000C	35w	DC24V	15000	62x62x66	<80cm	16
VSD-20000C	40w	DC24V	20000	74.8x74.8x82	<80cm-120cm	16
VSD-25000C	70w	DC24V	25000	74.8x74.8x82	<80cm-120cm	16
VOLTAGE:110-240V DC WOLTAGE:12V/24V FREQUENGY:50/60Hz						

