


High Precision Multi-Axis Checkweigher

Unqualified automatic elimination

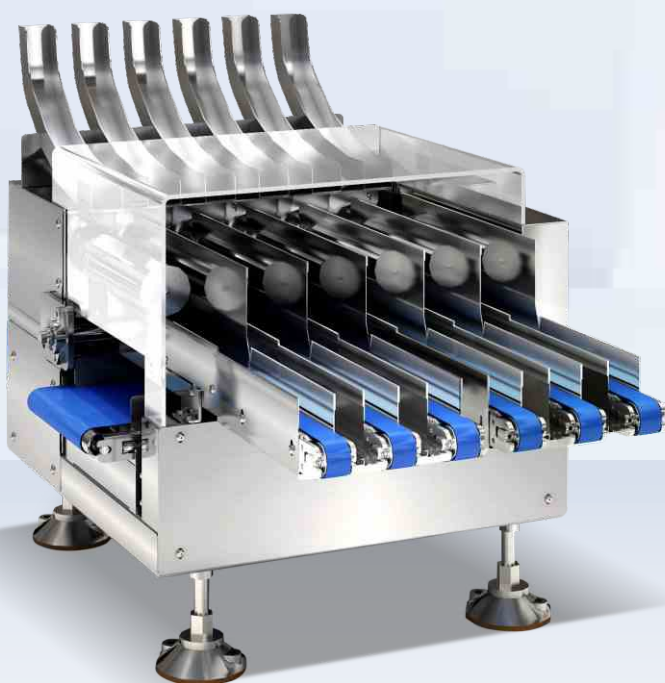

Product Features

- Touchscreen human-machine dialogue, fully intelligent and humanized design;
- Can preset 100 formulas, import production data into USB flash drive with one click, and trace 300000 pieces of weight data;
- Compliant with GMP standards, easy to disassemble, and convenient to clean;
- Intuitive operation and multi language screen can be finalized with just one click, maximizing operational efficiency with a single glance of information;
- Specially designed overload protection device can effectively protect the sensor from damage under the heavy pressure of objects with hundreds of times the range, ensuring that the weighing accuracy is intact and undamaged.

Product technical parameters

Product model	SCP6	Weighing Range	0.1-100g
Weight checking accuracy	±0.02-0.05g	Belt speed	40-50 cuts/minute
Collect conveying width	200mm	Number of columns	Customized
Length of conveyor belt	Customized	Column spacing width	Customized
Product output table height	270-750mm		

note*

SCW Column distance, such as SCW0680, where 06 represents 6 columns and 80 represents column spacing of 80mm

The number of columns and spacing are made according to the requirements of the packaging machine:

the normal operating voltage is 220VAC, 50/60HZ, and the current is ≤ 2.5A

The distance between the material chute of the packaging machine and the ground is too small, and an intermittent multi column climbing conveyor needs to be installed