

欢迎致电赛冠，索取最新产品资料，赛冠保留产品各项参数修改权和最终解释权

Welcome to call SameGram to request the latest product information.
SameGram reserves all product parameters Right of modification and final interpretation

SameGram

Non-standard customized dynamic weighing and automatic weighing equipment

PRODUCT SELECTION GUIDE 产品选型手册

Digital Management | Data Traceability | MES Integration/ERP System

The product weight of the production line is not enough or the parts are lost and the intelligent weight checking solution is provided



SG

广东赛冠智能装备有限公司

地址：东莞市横沥镇三江工业区33号

✉ sale@samegram.com

☎ 13712368272

🌐 www.samegram.cn

SameGram Intelligent Equipment Co., Ltd.

ADD: No. 33, Sanjiang Industrial Zone, Hengli Town, Dongguan City

SameGram

企业数字化管理 | 数据可追溯 | 对接MES/ERP系统

专注产线 **欠量** 或 **漏件** 提供智能检重解决方案
非标定制各类动态检重称以及自动称重设备

中国·东莞
CHINA·DONGGUAN

2026 Ver1.0

COMPANY PROFILE

公司简介

广东赛冠智能装备有限公司 (SameGram) 是一家从事动态检重和智能称重系统的高科技企业, 专注于动态检重秤、自动称重机、重量分拣设备、异物检测设备、自动贴标机及检重系统集成的研发与制造。

SameGram自主研发的自动称重系统和动态检重设备广泛应用于食品、医药、物流、电子产品、化妆品等高标准行业。我们提供高精度、可定制化且易于集成的工业自动化称重解决方案, 帮助客户在关键控制点实现自动检重, 提高生产线效率, 并确保产品的合规性、一致性和安全性。

SameGram拥有15年的技术专长和20项专有专利。我们的解决方案可帮助客户管理包装流程的各个环节, 从检查包装重量和内容物的准确性到使用在线金属检测系统检测异物。我们可根据客户的生产线需求进行定制, 并符合ISO9001和CE认证要求。

SameGram Intelligent Equipment Co., Ltd. is a high-tech enterprise specializing in dynamic checkweighing and intelligent weighing systems. We focus on the research and development and manufacturing of dynamic checkweighers, automatic weighing machines, weight sorting equipment, foreign object detection equipment, automatic labeling machines, and checkweighing system integration.

SameGram's independently developed automatic weighing systems and dynamic checkweighing equipment are widely used in high-standard industries such as food, pharmaceuticals, logistics, electronics, and cosmetics. We provide high-precision, customizable, and easily integrated industrial automation weighing solutions to help customers achieve automatic checkweighing at critical control points, improve production line efficiency, and ensure product compliance, consistency, and safety.

SameGram boasts 15 years of technical expertise and 20 proprietary patents. Our solutions help customers manage every aspect of the packaging process, from checking the accuracy of package weight and contents to detecting foreign objects using online metal detection systems. We can customize solutions to meet the specific needs of our clients' production lines and comply with ISO9001 and CE certification requirements.



WHY CHOOSE US? 为什么选择我们?

智能称重/检重设备整套供应商 定制生产一站式服务

Intelligent mechanical equipment complete set supplier customized production one-stop service

非标定制: 根据需求定制, 完美适配您的生产线

Non standard customization: customized according to your needs, perfectly adapted to your production line

免费寄样测试: 支持上门验厂看机 免费试机测样

Free sample testing: supports on-site factory inspection, machine viewing, free machine testing and sample testing

5000+案例合作: 5000+客户见证, 市场广泛认可

5000+case cooperation: 5000+customer witnesses, widely recognized by the market

15年技术研发生产经验: 15年技术积累, 行业领先

15 years of technical research and development production experience:

交期快速: 标准机型当天发货, 确保按时交付

Fast delivery: Standard models are shipped on the same day to ensure on-time delivery

售后无忧: 上门调试、两年质保、终身维护

Worry free after-sales service: on-site debugging, two-year warranty, lifelong maintenance



SameGram



CERTIFICATE OF HONOR 荣誉证书

深度资质认证，打造行业标杆

Deep qualification certification,
creating industry benchmarks

专项证书

- ▶ 高新技术企业认证
- ▶ ISO9001质量体系认证
- ▶ 欧盟CE认证
- ▶ 多项自主专利技术

- ▶ New technology enterprise certification
- ▶ ISO9001 quality system certification
- ▶ EU CE certification
- ▶ several proprietary technologies

20+



因为专注 所以专业
BECAUSE OF FOCUS I AM PROFESSIONAL

致力于为客户提供更稳定、可靠的称重系统解决方案
Committed to providing customers with more stable and reliable weighing system solutions

THE CASE SHOWS

案例展示

提供一站式称重/检重解决方案
Provide one-stop weighing/inspection solutions

食品行业



精准检测食品(袋装、罐装、瓶装)重量, 筛选不达标产品, 同时确保包装附件(如调料包、叉勺干燥剂等)完整, 避免客诉问题

Food industry

Accurately detect the weight of food (bagged, canned, bottled, etc.), screen for substandard products, and ensure the integrity of packaging accessories (such as seasoning packs, fork spoons, desiccants, etc.) to avoid customer complaints



制药行业

适用于药丸、药片、胶囊、冲剂颗粒等药品的包装, 在线检测其包装产品是否存在欠重或超重的情况

Pharmaceutical industry

Suitable for packaging pills, tablets, capsules, granules and other drugs, online detection of whether the packaged products are underweight or overweight



日化行业



检测日化产品净含量是否合格, 说明书/干燥剂/附件是否漏装, 盒装/袋装/箱装是否缺件, 轻松实现包装生产线产品100%全检

Daily chemical industry

Check whether the net content of daily chemical products is qualified, whether the instructions/desiccants/accessories are missing, whether there are missing parts in boxed/bagged/boxed packaging, and easily achieve 100% full inspection of packaging production line products



COOPERATION PARTNERS

合作伙伴

通过紧密合作，我们与合作伙伴共同推动了行业的进步，为客户提供了更加优质的产品和服务。
Through close collaboration, we have jointly promoted the progress of the industry with our partners
Provided customers with higher quality products and services.

精诚合作, 携手共赢



Sincere cooperation hand in hand
for mutual benefit

CONTENTS

目录

01 自动检重秤系列 Automatic checkweigher series	
药片高精度检重秤 Tablet high-precision weighing scale	01
高精度多列检重秤 High precision multi column weighing scale	02-03
食品多装漏装重量检重秤 Weight inspection scale for food with multiple missing contents	04
书本高速动态检重秤 Book high-speed dynamic weighing scale	05
自动检重秤 Automatic weighing scale	06
家电外箱检重秤 Household appliance outer box weighing scale	07
动力滚筒秤 Power drum scale	08
高精度带式组合秤 High-precision belt combined scale	09
02 称重即时打印贴标机系列 Weighing instant printing and labeling machine series	
非接触式自动称重即时打印贴标机 Non contact automatic weighing instant printing and labeling machine	10
漆包线自动扫码称重即时打印贴标机 Automatic scanning, weighing, instant printing, and labeling machine for enameled wire	11
外箱全自动侧面称重即时打印贴标机 Full automatic side weighing, instant printing and labeling machine for outer boxes	12
自动称重即时打印贴标机 Automatic weighing, instant printing, and labeling machine	13
即时打印贴标机 Instant printing and labeling machine	14
03 物流称重系列 Logistics weighing series	
高速高精度自动称重机 High speed and high-precision automatic weighing machine	15
高速物流称 High-speed logistics scale	16
高速物流称重秤 (双秤) High-speed logistics weighing scale (dual scale)	17
04 金检重检一体机/金属检测机 Metal detection weight detection all-in-one machine	
金检重检一体机 Metal detection weight detection all-in-one machine	18
金属检测机 metal detector	19
铝箔金属检测机 Aluminum foil metal detection machine	20
金属分离机 Metal separator	21
05 X光检测机 X-ray inspection machine	
标准型袋装检测X光异物检测机 Standard bag inspection X-ray foreign object detection machine	22
高精度型袋装检测X光异物检测机 High precision bag detection X-ray foreign object detection machine	23
06 正反转选别秤 Positive and negative sorting scale	
正反转选别秤 Positive and negative sorting scale	24
中药饮片动态选别秤 Dynamic selection scale for traditional Chinese medicine decoction pieces	25
07 分选秤系列 Sorting scale series	
摆臂式重量分选机 Swing arm type weight sorting machine	26
双层式海鲜称重分选机 Swing arm type weight sorting machine	27
圆盘式重量分选机 High-precision small weighing machine	28
08 定制机型 Custom models	
滚筒式喷码称重机 Drum type inkjet weighing machine	29
精密流水线在线检重秤 Assembly line check weight scale	30
打印贴标机系列 Printing and Labeling Machine Series	31-32
防爆秤 Explosion proof scale	33
动态喷码检重秤 Dynamic printing weight checking scale	33
多功能剔除分流检重秤 Multi function elimination check scale	34
双通道动态检重秤 Dual channel dynamic check scale	34
09 包装机系列 Packing machine series	
称重计数包装机 Assembly line check weight scale	35

Tablet high-precision weighing scale 药片高精度检重秤

不合格自动剔除

Unqualified automatic elimination



产品特点

- ①三级操作权限管理，支持自设密码
- ②触摸屏操作界面，人性化设计
- ③采用变频控制电机，速度可根据需要调节
- ④系统具备危险通知、紧急停止按钮和防护罩等功能
- ⑤可组合配置自动装盒机、生产流水线、自动灌装机、立式包装机等

Product Features

- Three level operation permission management, supporting self setting passwords
- Touch screen operation interface, user-friendly design
- Adopting variable frequency control motor, the speed can be adjusted according to needs
- The system has functions such as danger notification, emergency stop button, and protective cover
- Can be combined with automatic box packing machine, production line, automatic filling machine, vertical packaging machine, etc

产品技术参数/Product technical parameters

产品型号/Product model	SC1-H-3512L1	存储配方/Storage formula	100种
显示分度/Display division	0.02g	皮带速度/Belt speed	5-90米/分钟 5-90m/min
检重范围/Inspection weight range	1-1000g	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.03-0.1g	机壳材质/Shell material	不锈钢304 Stainless steel 304
称重段尺寸/Size of weighing section	L 350mm*W 120mm	检重段数/Sorting section	标准2段，可选3段 Standard 2 section, optional 3 sections
适检产品尺寸/Suitable product size	L≤200mm; W≤120mm	数据输送/data transmission	USB数据导出 USB data export
剔除方式/Elimination method	气吹、推杆、摆臂、跌落、上下翻版等（可定制） Air blowing, push rod, swing arm, drop, up and down replication, etc. (customizable)		
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。

选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.

Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

High precision multi column weighing scale 高精度多列检重秤

不合格自动剔除

Unqualified automatic elimination




产品特点

- ①检测精度高，性能稳定，特殊的结构设计，可有效规避外部干扰
- ②能预设100个配方，生产数据一键导入U盘，可追溯30万条重量数据
- ③符合GMP规范要求，拆卸简易，清洁方便
- ④直观的操作和多语言画面可一键敲定，信息一目了然，最大限度提高操作效率
- ⑤特殊设计的过载保护装置，能在上百倍量程物体的重压下有效保护传感器不受损伤，使称量精度完好无损

Product Features

- Touchscreen human-machine dialogue, fully intelligent and humanized design
- Can preset 100 formulas, import production data into USB flash drive with one click, and trace 300000 pieces of weight data
- Compliant with GMP standards, easy to disassemble, and convenient to clean
- Intuitive operation and multi language screen can be finalized with just one click, maximizing operational efficiency with a single glance of information
- Specially designed overload protection device can effectively protect the sensor from damage under the heavy pressure of objects with hundreds of times the range, ensuring that the weighing accuracy is intact and undamaged

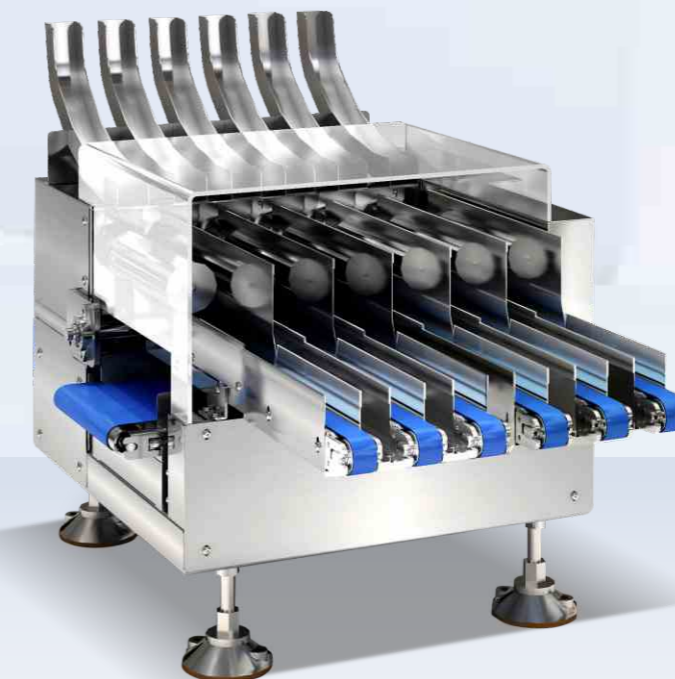

产品技术参数/Product technical parameters

产品型号/Product model	SCP6	称量范围/Weighing Range	0.1-100g
检重精度/Weight checking accuracy	±0.02-0.05g	皮带速度/Belt speed	40-50切/分钟 40-50 cuts/minute
收集输送宽度/Collect conveying width	200m	列数/Number of columns	定制/Customized
输送皮带长度/Length of conveyor belt	定制/Customized	列间距宽度/Column spacing width	定制/Customized
产品输出台面高度/Product output table height	270-750mm		

注* SCW 列数间距，如SCW0680，06为6列，80为列间距80mm
列数和间距根据包装机要求制作：正常使用电压为220VAC，50/60HZ，电流≤2.5A
包装机落料槽与地面间距太小需加装间歇式多列爬坡输送机

note* SCW Column, number, interval, distance, such as SCW0680, where 06 represents 6 columns and 80 represents column spacing of 80mm
The number of columns and spacing are made according to the requirements of the packaging machine:
the normal operating voltage is 220VAC, 50/60HZ, and the current is ≤ 2.5A
The distance between the material chute of the packaging machine and the ground is too small,
and an intermittent multi column climbing conveyor needs to be installed

Scraper type high-precision multi column weighing scale 刮板式高精度多列检重秤

不合格自动剔除

Unqualified automatic elimination

产品特点


- ①检测精度高，性能稳定，特殊的结构设计，可有效规避外部干扰
- ②能预设100个配方，生产数据一键导入U盘，可追溯30万条重量数据
- ③符合GMP规范要求，拆卸简易，清洁方便
- ④直观的操作和多语言画面可一键敲定，信息一目了然，最大限度提高操作效率

Product Features

- Touchscreen human-machine dialogue, fully intelligent and humanized design
- Can preset 100 formulas, import production data into USB flash drive with one click, and trace 300000 pieces of weight data
- Compliant with GMP standards, easy to disassemble, and convenient to clean
- Intuitive operation and multi language screen can be finalized with just one click, maximizing operational efficiency with a single glance of information

适用于多列包装机
精度±0.02-0.05g
药品首选

Suitable for multi column
packaging machines
Accuracy ± 0.02-0.05g
Preferred drugs

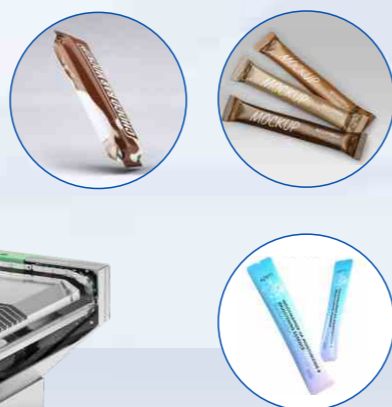

产品技术参数/Product technical parameters

产品型号/Product model	SCG6	称量范围/Weighing Range	0.1-100g
检重精度/Weight checking accuracy	±0.02-0.05g	皮带速度/Belt speed	40-60切/分钟 40-60 cuts/minute
收集输送宽度/Collect conveying width	200m	列数/Number of columns	定制/Customized
输送皮带长度/Length of conveyor belt	定制/Customized	列间距宽度/Column spacing width	定制/Customized
产品输出台面高度/Product output table height	270-750mm		

注*列数和间距根据包装机要求制作：正常使用电压为220VAC，50/60HZ，电流≤2.5A
包装机落料槽与地面间距太小需加装间歇式多列爬坡输送机

note*

The number of columns and spacing are made according to the requirements of the packaging machine:
the normal operating voltage is 220VAC, 50/60HZ, and the current is ≤ 2.5A
The distance between the material chute of the packaging machine and the ground is too small,
and an intermittent multi column climbing conveyor needs to be installed

Weight inspection scale for food with multiple or missing contents 食品多装漏装重量检重秤

不合格自动剔除

Unqualified automatic elimination



产品特点

- ①可调节挡板，产品限位轻松切换
- ②三级操作权限管理，支持自设密码
- ③触摸屏操作，人性化设计
- ④系统具备危险通知、紧急停止按钮和防护罩等功能
- ⑤采用变频控制电机，速度可根据需要调节
- ⑥可组合配置自动装盒机、生产流水线、自动灌装机、立式包装机等

Product Features

- Adjustable baffle, easy switching of product limit
- Three level operation permission management, supporting self setting passwords
- Touch screen operation, user-friendly design
- The system has functions such as danger notification, emergency stop button, and protective cover
- Adopting variable frequency control motor, the speed can be adjusted according to needs
- Can be combined with automatic box packing machine, production line, automatic filling machine, vertical packaging machine, etc



产品技术参数/Product technical parameters

产品型号/Product model	SCF-4523L3	存储配方/Storage formula	100种
显示分度/Display division	0.1g	皮带速度/Belt speed	5-90米/分钟 5-90m/min
检重范围/Inspection weight range	1-3000g	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.3-2g	机壳材质/Shell material	不锈钢304 Stainless steel 304
称重段尺寸/Size of weighing section	L 450mm*W 230mm	整机尺寸/Dimensions	1300*900*1400mm (LxWxH)
适检产品尺寸/Suitable product size	L≤300mm; W≤220mm	检重段数/Sorting section	标准2段，可选3段 Standard 2 section, optional 3 sections
剔除方式/Elimination method	气吹、推杆、摆臂、跌落、上下翻版等（可定制） Air blowing, push rod, swing arm, drop, up and down replication, etc. (customizable)		
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注*最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。
选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.

Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Book high-speed dynamic weighing scale 书本高速动态检重秤

不合格自动剔除

Unqualified automatic elimination



产品特点

- ①三级操作权限管理，支持自设密码
- ②触摸屏操作，人性化设计
- ③系统具备危险通知、紧急停止按钮和防护罩等功能
- ④采用变频控制电机，速度可根据需要调节
- ⑤可组合配置自动装盒机、生产流水线、自动灌装机、立式包装机等

Product Features

- Three level operation permission management, supporting self setting passwords
- Touch screen operation, user-friendly design
- The system has functions such as danger notification, emergency stop button, and protective cover
- Adopting variable frequency control motor, the speed can be adjusted according to needs
- Can be combined with automatic box packing machine, production line, automatic filling machine, vertical packaging machine, etc



产品技术参数/Product technical parameters

产品型号/Product model	SC1-5040L5	存储配方/Storage formula	100种
显示分度/Display division	0.1g	皮带速度/Belt speed	5-90米/分钟 5-90m/min
检重范围/Inspection weight range	1-5000g	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.5-3g	气源/Gas source	0.5-0.8MPa
机壳材质/Shell material	不锈钢304 Stainless steel 304	检重段数/Sorting section	标准2段，可选3段 Standard 2 section, optional 3 sections
适检产品尺寸/Suitable product size	L≤300mm; W≤400mm	数据输送/data transmission	USB数据导出 USB data export
剔除方式/Elimination method	推杆、摆臂、跌落、上下翻版等（可定制） push rod, swing arm, drop, up and down replication, etc. (customizable)		
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。
选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。
note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.
Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Automatic weighing scale 自动检重秤

不合格自动剔除

Unqualified automatic elimination

产品特点

- ①304全不锈钢材质，IP65防护等级
- ②三级操作权限管理，支持自设密码
- ③触摸屏操作，人性化设计
- ④采用变频控制电机，速度可根据需要调节
- ⑤三色灯上下限报警功能，严控把关流水线产品质量
- ⑥可组合配置自动装盒机、生产流水线、自动灌装机、立式包装机等

Product Features

- 304 all stainless steel material, Ip65 protection level
- Three level operation permission management, supporting self setting passwords
- Touch screen operation, user-friendly design
- Adopting variable frequency control motor, the speed can be adjusted according to needs
- Three color light upper and lower limit alarm function, strict control and quality control of assembly line products
- The conveyor belt is easy to disassemble and assemble, easy to install and maintain, and easy to clean



产品技术参数/Product technical parameters

产品型号/Product model	SC2-8050L30	存储配方/Storage formula	100种
显示分度/Display division	1g	皮带速度/Belt speed	5-90米/分钟 5-90m/min
检重范围/Inspection weight range	0.05-30kg	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±3-10g	机壳材质/Shell material	不锈钢304 Stainless steel 304
称重段尺寸/Size of weighing section	L 800mm*W 500mm	检重段数/Sorting section	标准1段，可选3段 Standard 1 section, optional 3 sections
适检产品尺寸/Suitable product size	L≤600mm; W≤500mm	数据输送/data transmission	USB数据导出 USB data export
剔除方式/Elimination method	推杆式、摆轮式可选 Push rod type and swing wheel type are optional		
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。
选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。
note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.
Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Household appliance outer box weighing scale 家电外箱检重秤

不合格自动剔除

Unqualified automatic elimination

自动检重秤系列
Automatic Weighing Scale Series



产品特点

- ①强大的计算功能，记录各项检测数据
- ②三级操作权限管理，支持自设密码
- ③触摸屏操作，人性化设计
- ④采用变频控制电机，速度可根据需要调节
- ⑤输送带易于拆装，安装维护方便，便于清洁

Product Features

- Powerful computing capabilities to record various detection data
- Three level operation permission management, supporting self setting passwords
- Touch screen operation, user-friendly design
- Adopting variable frequency control motor, the speed can be adjusted according to needs
- The conveyor belt is easy to disassemble and assemble, easy to install and maintain, and easy to clean

产品技术参数/Product technical parameters

产品型号/Product model	SC3-10060L50	存储配方/Storage formula	100种
显示分度/Display division	0.001kg	皮带速度/Belt speed	5-90米/分钟 5-90m/min
检重范围/Inspection weight range	0.05-50kg	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±5-20g	机壳材质/Shell material	碳钢喷漆 Carbon steel spray painting
称重段尺寸/Size of weighing section	L 1000mm*W 600mm	数据输送/data transmission	USB数据导出 USB data export
适检产品尺寸/Suitable product size	L≤800mm; W≤600mm	检重段数/Sorting section	标准1段，可选3段 Standard 1 section, optional 3 sections
剔除方式/Elimination method	推杆式、摆轮式、顶升移栽可选 Push rod type, swing wheel type, and top lifting transplanting are optional		
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。

选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.

Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Power drum scale 动力滚筒秤

不合格自动剔除

Unqualified automatic elimination

产品特点

- ①滚轴流畅，可配合流水线称重
- ②三级操作权限管理，支持自设密码
- ③强大的计算功能，记录各项检测数据
- ④三色灯上下限报警功能，严控把关流水线产品质量
- ⑤输送带易于拆装，安装维护方便，便于清洁

Product Features

- Smooth roller, compatible with assembly line weighing
- Three level operation permission management, supporting self setting passwords
- Powerful computing capabilities to record various detection data
- Three color light upper and lower limit alarm function, strict control and quality control of assembly line products
- The conveyor belt is easy to disassemble and assemble, easy to install and maintain, and easy to clean



304不锈钢款，可选碳钢喷漆款
304 stainless steel version,
optional titanium steel spray painted version



产品技术参数/Product technical parameters

产品型号/Product model	SC3-10060L30	存储配方/Storage formula	100种
显示分度/Display division	0.01kg	皮带速度/Belt speed	5-60米/分钟 5-60m/min
检重范围/Inspection weight range	1-30kg	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±15-30g	机壳材质/Shell material	不锈钢304 Stainless steel 304
称重段尺寸/Size of weighing section	L 1000mm*W 600mm	数据输送/data transmission	USB数据导出 USB data export
适检产品尺寸/Suitable product size	L≤750mm; W≤600mm	检重段数/Sorting section	标准1段，可选3段 Standard 1 section, optional 3 sections
剔除方式/Elimination method	推杆式、摆轮式、顶升移栽可选 Push rod type, swing wheel type, and top lifting transplanting are optional		
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。

选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.

Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

High-precision belt combined scale 高精度带式组合秤

产品特点

- ①可拆卸皮带秤台，方便清洗
- ②304全不锈钢材质，IP65防水等级
- ③可设定目标生产数量，称重数量达到预设值后自动停机
- ④可设定依次下料间隔和皮带数量，可实现混料功能
- ⑤可设定单重超过设定规格时警示提醒；物料异常、组合不到时，物料更换提醒

Product Features

- Detachable belt scale platform for easy cleaning
- 304 all stainless steel material, Ip65 waterproof rating
- The target production quantity can be set, and the machine will automatically shut down after reaching the preset value
- Can set the cutting interval and number of belts in sequence, and can achieve mixing function
- Warning reminders can be set when the single weight exceeds the set specifications; Reminder for material replacement when materials are abnormal or cannot be combined.



产品技术参数/Product technical parameters

产品型号/Product model	SBW-2512B12	存储配方/Storage formula	100种
单斗计量/Weight range	1-500g	组合计量/Combination measurement	10-2000g
显示分度/Display division	0.01g	称重速度/Weighing speed	30件/分钟 30 pieces/minute
组合精度/Combination accuracy	±0.1-3g	电源/power supply	AC220V±10%
称重段尺寸/Size of weighing section	L 250mm*W 120mm	机壳材质/Shell material	不锈钢304 Stainless steel 304
配重秤台/Weigh sections	标准12头 Standard 12 sections	数据输送/data transmission	USB数据导出 USB data export
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。

选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.

Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Non contact automatic weighing instant printing and labeling machine 非接触式自动称重即时打印贴标机

上平面喷贴 Upper plane sticker



适用于食品以及不重压的产品

Suitable for food and non heavy products



产品特点

- ①记忆存储功能，可存储100组参数
- ②动态生成条形码/二维码，打印速度可调节
- ③支持MES、ERP系统对接，配送中心计算价格等
- ④集成打印贴标机模板编辑软件，贴标内容可任意编辑
- ⑤本产品机头可上下调节位置，适合不同的产线
- ⑥多种贴标方式可选择，满足不同场合或不同物品的即印贴标需求
- ⑦自动调整产品信息、打印机、标签位置和标签旋转，以适应不同产品和生产线的需求

Product Features

- Memory storage function, capable of storing 100 sets of parameters
- Dynamically generate barcodes/QR codes, with adjustable printing speed
- Support MES, ERP system integration, distribution center price calculation, etc
- Integrated printing and labeling machine template editing software, labeling content can be edited freely
- The machine head of this product can be adjusted up and down, suitable for different production lines
- Multiple labeling methods are available to meet the labeling needs of different occasions or objects
- Automatically adjust product information, printer, label position, and label rotation to meet the needs of different products and production lines

产品技术参数/Product technical parameters

产品型号/Product model	SCL-7030L5	存储配方/Storage formula	100种
显示分度/Display division	0.1g	贴标速度/Labeling speed	15-50pcs/min
检重范围/Inspection weight range	1-5000g	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.5-2g	机壳材质/Shell material	不锈钢304 Stainless steel 304
称重段尺寸/Size of weighing section	L 700mm*W 300mm	贴标精度/Labeling accuracy	±5-30mm
适检产品尺寸/Suitable product size	L≤500mm; W≤300mm	数据输送/data transmission	USB数据导出 USB data export
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。

选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.

Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Automatic scanning, weighing, instant printing and labeling machine for enameled wire 漆包线自动扫码称重即时打印贴标机

上平面贴 Flat sticker

产品特点

- ①记忆存储功能，可存储100组参数
- ②动态生成条形码/二维码，打印速度可调节
- ③支持MES、ERP系统对接，配送中心计算价格等
- ④集成打印贴标机模板编辑软件，贴标内容可任意编辑
- ⑤本产品机头可上下调节位置，适合不同的产线
- ⑥多种贴标方式可选择，满足不同场合或不同物品的即印贴标需求
- ⑦自动调整产品信息、打印机、标签位置和标签旋转，以适应不同产品和生产线的需求

Product Features

- Memory storage function, capable of storing 100 sets of parameters
- Dynamically generate barcodes/QR codes, with adjustable printing speed
- Support MES, ERP system integration, distribution center price calculation, etc
- Integrated printing and labeling machine template editing software, labeling content can be edited freely
- The machine head of this product can be adjusted up and down, suitable for different production lines
- Multiple labeling methods are available to meet the labeling needs of different occasions or objects
- Automatically adjust product information, printer, label position, and label rotation to meet the needs of different products and production lines



产品技术参数/Product technical parameters

产品型号/Product model	SCL-10060L50	存储配方/Storage formula	100种
显示分度/Display division	0.001kg	贴标速度/Labeling speed	15-25pcs/min
检重范围/Inspection weight range	10g-50kg	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.5-2g	机壳材质/Shell material	不锈钢304 Stainless steel 304
称重段尺寸/Size of weighing section	L 500mm*W 300mm	贴标精度/Labeling accuracy	±5-10mm
适检产品尺寸/Suitable product size	L≤300mm; W≤300mm	数据传输/data transmission	USB数据导出 USB data export
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。
选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.
Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Full automatic side weighing, instant printing and labeling machine for outer boxes 外箱全自动侧面称重即时打印贴标机

侧面贴 Side stickers

产品特点

- ①记忆存储功能，可存储100组参数
- ②动态生成条形码/二维码，打印速度可调节
- ③支持MES、ERP系统对接，配送中心计算价格等
- ④集成打印贴标机模板编辑软件，贴标内容可任意编辑
- ⑤本产品机头可上下调节位置，适合不同的产线
- ⑥多种贴标方式可选择，满足不同场合或不同物品的即印贴标需求
- ⑦自动调整产品信息、打印机、标签位置和标签旋转，以适应不同产品和生产线的需求

Product Features

- Memory storage function, capable of storing 100 sets of parameters
- Dynamically generate barcodes/QR codes, with adjustable printing speed
- Support MES, ERP system integration, distribution center price calculation, etc
- Integrated printing and labeling machine template editing software, labeling content can be edited freely
- The machine head of this product can be adjusted up and down, suitable for different production lines
- Multiple labeling methods are available to meet the labeling needs of different occasions or objects
- Automatically adjust product information, printer, label position, and label rotation to meet the needs of different products and production lines



产品技术参数/Product technical parameters

产品型号/Product model	SCL-8050L3	存储配方/Storage formula	100种
显示分度/Display division	0.001kg	贴标速度/Labeling speed	15pcs/min
检重范围/Inspection weight range	1-30kg	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.5-2g	机壳材质/Shell material	不锈钢304 Stainless steel 304
称重段尺寸/Size of weighing section	L 800mm*W 500mm	贴标精度/Labeling accuracy	±5-10mm
适检产品尺寸/Suitable product size	L≤500mm; W≤500mm	数据传输/data transmission	USB数据导出 USB data export
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。
选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.
Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Automatic scanning, weighing, instant printing and labeling machine for enameled wire

自动称重即时打印贴标机

下面平贴 Flat sticker below

产品特点

- ①记忆存储功能，可存储100组参数
- ②动态生成条形码/二维码，打印速度可调节
- ③支持MES、ERP系统对接，配送中心计算价格等
- ④集成打印贴标机模板编辑软件，贴标内容可任意编辑
- ⑤本产品机头可上下调节位置，适合不同的产线
- ⑥多种贴标方式可选择，满足不同场合或不同物品的即印贴标需求

Product Features

- Memory storage function, capable of storing 100 sets of parameters
- Dynamically generate barcodes/QR codes, with adjustable printing speed
- Support MES, ERP system integration, distribution center price calculation, etc
- Integrated printing and labeling machine template editing software, labeling content can be edited freely
- The machine head of this product can be adjusted up and down, suitable for different production lines
- Multiple labeling methods are available to meet the labeling needs of different occasions or objects



产品技术参数/Product technical parameters

产品型号/Product model	SCL-4530L10	存储配方/Storage formula	100种
显示分度/Display division	0.001kg	贴标速度/Labeling speed	15-25pcs/min
检重范围/Inspection weight range	10g-50kg	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.5-2g	机壳材质/Shell material	不锈钢304 Stainless steel 304
称重段尺寸/Size of weighing section	L 500mm*W 300mm	贴标精度/Labeling accuracy	±5-10mm
适检产品尺寸/Suitable product size	L≤300mm; W≤300mm	数据传输/data transmission	USB数据导出 USB data export
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。

选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.

Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Instant printing and labeling machine 即时打印贴标机



产品特点

- ①集成化贴标动作控制和打印数据处理
- ②全自动打印贴标，无人职守，机器自动作业
- ③告别繁琐的人工打印贴标，提升工作效率、降低生产成本

Product Features

- Integrated labeling action control and printing data processing
- Fully automatic printing and labeling, unmanned, machine operated automatically
- Say goodbye to tedious manual printing and labeling, improve work efficiency, and reduce production costs

产品技术参数/Product technical parameters

产品型号/Product model	SL	标签宽度/Label width	20-140mm
贴标精度/Labeling accuracy	±2-10mm	标签长度/Label length	20-200mm
打印机/Printer	斑马、TSC、霍尼韦尔可选	贴标类型/Labeling type	推压式/Push type
贴标部位/Labeling site	上面平贴、侧面可选 Top and side options available	贴标速度/Labeling speed	20-40P/min
分辨率/Resolution	203/300/600dpi	贴标精度/Labeling accuracy	±2-10mm
背纸宽度/Back width	16-114mm	打印宽度/Print width	16~104mm
碳带宽度/Carbon band width	25.4~107mm 厚度0.06~0.3mm	打印长度/Printing speed	20-990mm
外形尺寸/Overall dimension	800x670x1600mm(可定制) 800x670x1600mm(customizable)	打印速度/Printing speed	305mm/s(203dpi) 254mm/s(300dpi)
剔除方式/Elimination method	推杆式、摆轮式、顶升移栽可选 Push rod type, swing wheel type, and top lifting transplanting are optional	出纸方式Paper production mode	左手/右手 Left hand/right hand
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。

选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.

Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

High speed and high-precision automatic weighing machine

高速高精度自动称重机

产品特点

- ①强大的计算功能，记录各项检测数据
- ②三级操作权限管理，支持自设密码
- ③触摸屏操作，人性化设计
- ④采用变频控制电机，速度可根据需要调节
- ⑤输送带易于拆装，安装维护方便，便于清洁

Product Features

- Powerful computing capabilities to record various detection data
- Three level operation permission management, supporting self setting passwords
- Touch screen operation, user-friendly design
- Adopting variable frequency control motor, the speed can be adjusted according to needs
- The conveyor belt is easy to disassemble and assemble, easy to install and maintain, and easy to clean



适用于小包裹≤5kg
 皮带速度120米/分钟
 精度±3-5g
 Suitable for small packages weighing ≤ 5kg
 Belt speed ≤ 120 m/minute
 Accuracy ± 3-5 grams



产品技术参数/Product technical parameters

产品型号/Product model	SC2-L-6055S5	存储配方/Storage formula	1种
显示分度/Display division	0.1g	皮带速度/Belt speed	5-120米/分钟 5-120m/min
检重范围/Inspection weight range	1-5000g	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±1-5g	机壳材质/Shell material	不锈钢304 Stainless steel 304
称重段尺寸/Size of weighing section	L 600mm*W 550mm	数据输送/data transmission	USB数据导出 USB data export
适检产品尺寸/Suitable product size	L≤400mm; W≤400mm	检重段数/Sorting section	标准2段, 可选3段 Standard 2 section, optional 3 sections
剔除方式/Elimination method	推杆式、拨杆式、摆轮可选 Push rod, toggle, and balance wheel options are available		
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

High-speed logistics scale 高速物流秤

检重范围:1-60kg 最高精度:±30g
 皮带速度:5-120米/分钟



产品特点

- ①皮带转速快，用于检测物流包裹重量
- ②强大的计算功能，记录各项检测数据
- ③触摸屏操作，人性化设计
- ④采用变频控制电机，速度可根据需要调节
- ⑤三色灯上下限报警功能，严控把关流水线产品质量

Product Features

- The belt has a fast rotation speed and is used to detect the weight of logistics packages
- Powerful computing capabilities to record various detection data
- Touch screen operation, user-friendly design
- Adopting variable frequency control motor, the speed can be adjusted according to needs
- Three color light upper and lower limit alarm function, strict control and quality control of assembly line products




产品技术参数/Product technical parameters

产品型号/Product model	SC3-L-12080S60	存储配方/Storage formula	1种
显示分度/Display division	0.001kg	皮带速度/Belt speed	5-120米/分钟 5-120m/min
检重范围/Inspection weight range	1-60kg	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±10-20g	机壳材质/Shell material	碳钢喷漆 Carbon steel spray painting
称重段尺寸/Size of weighing section	L 1200mm*W 800mm	数据输送/data transmission	USB数据导出 USB data export
适检产品尺寸/Suitable product size	L≤800mm; W≤800mm	检重段数/Sorting section	标准1段 Standard 1 section
剔除方式/Elimination method	推杆式、拨杆式、摆轮可选 Push rod, toggle, and balance wheel options are available		
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。
 选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。
 note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.
 Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

High-speed logistics weighing scale (dual scale) 高速物流秤 (双秤)

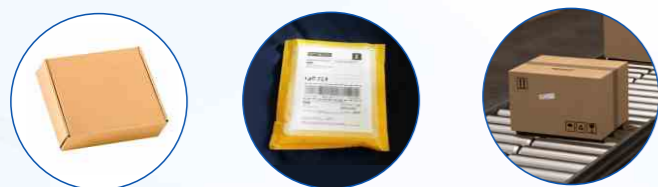

产品特点

- ①双秤台设计，皮带转速快，用于检测物流包裹重量
- ②强大的计算功能，记录各项检测数据
- ③触摸屏操作，人性化设计
- ④采用变频控制电机，速度可根据需要调节
- ⑤可对接RS232、485或以太网通讯端口

Product Features

- Dual weighing platform design, The belt has a fast rotation speed and is used to detect the weight of logistics packages
- Powerful computing capabilities to record various detection data
- Touch screen operation, user-friendly design
- Adopting variable frequency control motor, the speed can be adjusted according to needs
- It can interface with RS232, 485, or Ethernet communication ports

产品技术参数/Product technical parameters

产品型号/Product model	SC-L-90100L50	存储配方/Storage formula	1种
显示分度/Display division	0.001kg	皮带速度/Belt speed	5-120米/分钟 5-120m/min
检重范围/Inspection weight range	200g-50kg	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±50g	机壳材质/Shell material	碳钢喷漆 Carbon steel spray painting
称重一段尺寸/Weigh the first segment	L 900mm*W 1000mm	数据输送/data transmission	USB数据导出 USB data export
称重二段尺寸/Weigh the second segment	L 600mm*W 1000mm	检重段数/Sorting section	标准2段 Standard 1 section
适检产品尺寸/Suitable product size	L≤1000mm; W≤900mm	可选功能/Optional Features	实时打印 Real time printing
剔除方式/Elimination method	窄带式、摆轮可选 Narrow belt type and balance wheel are optional		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。

选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.

Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Metal detection weight detection all-in-one machine 金检重检一体机



产品特点

- ①具有开机自动故障检测和提示功能，可有效杜绝无效检测
- ②内置报表统计，报表可生成EXCEL格式，可插U盘实时导出数据
- ③系统高度集成，融合金属与重量检测，有效节省空间，简化生产线
- ④可实现高效自动化，自动检测、分类并剔除不合格品
- ⑤系统具备危险通知、紧急停止按钮和防护罩等功能

Product Features

- Equipped with automatic fault detection and prompt function up on startup, it can effectively testing
- Built in report statistics, reports can be generated in EXCEL format, and data can be exported in real-time by inserting a USB flash drive
- The system is highly integrated, integrating metal and weight detection to effectively save space and simplify the production line
- Can achieve efficient automation, automatically detect, classify, and eliminate non-conforming products
- The system has functions such as danger notification, emergency stop button, and protective device

产品技术参数/Product technical parameters

产品型号/Product model	SCM-4530L2	存储配方/Storage formula	100种
显示分度/Display division	0.1g	皮带速度/Belt speed	5-28米/分钟 5-28 m/minute
检重范围/Inspection weight range	1-2000g	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.3-1g	机壳材质/Shell material	不锈钢304 Stainless steel 304
金检通道尺寸/Size of goden inspection	H 120mm*W 300mm	数据输送/data transmission	USB数据导出 USB data export
适检产品尺寸/Suitable product size	L≤350mm; W≤300mm; H≤100mm	称重段尺寸/ Size of inspection section	L 450mm*W 230mm
剔除方式/Elimination method	推杆式、下滑式可选 Push rod type, sliding type optional		
检测方式/Detection method	电磁感应/数字称重传感器 Electromagnetic induction/digital weighing sensor		
金属检测空机灵敏度 Sensitivity of metal detection empty machine	Fe:0.6-1.2mm、Not Fe:0.8-1.5mm、Sus:1.2-2.0mm		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。


选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.

Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Metal detector 金属检测机

Metal detector
金属检测机

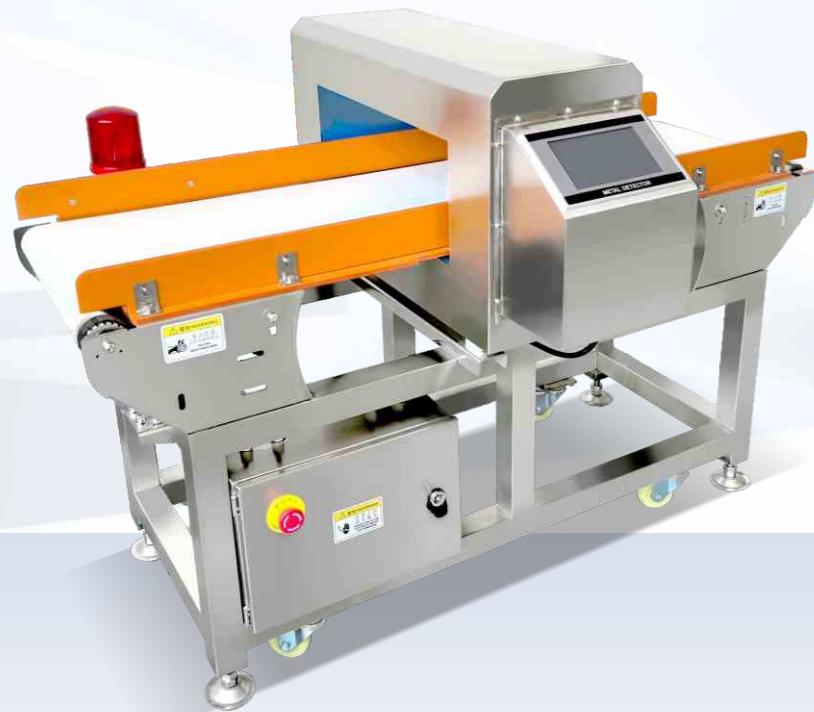

产品特点

- ①铁/铜铝/不锈钢/等金属问题全检测
- ②37米/分钟高速检测，误报率 < 0.1%
- ③输送剔除系统灵活适配，支持防水防爆防尘防震等严苛场景
- ④7英寸触控屏+一键自学习，无需调试快速上手，支持多语言切换
- ⑤SUS304镜面机身+无死角卡扣
- ⑥208+产品参数记忆功能，无缝切换多品类生产线

Product Features

- Comprehensive testing for iron/copper, aluminum/stainless steel, and other metals
- High-speed detection at 37 meters per minute, with a false alarm rate of less than 0.1%
- The conveying and removal system is flexibly adaptable and supports harsh environments such as waterproof, explosion-proof, dust-proof, and shock-proof scenarios
- 7-inch touch screen + one-click self-learning, no need for debugging, quick start, supports multi-language switching
- SUS304 mirror-finished body + no-dead-angle buckle
- 208+product parameter memory function, seamless switching between multi category production lines

产品技术参数/Product technical parameters

产品型号/Product model	标准机DD-360系列			非标准机DD-360-C系列					
检测通道宽度(mm)/Detect channel width	400			500-定制非标/500-Custom Non-Standard					
检测通道高度(mm)/Detect channel height	100	120	150	200	250	300	350	400	
标准检测灵敏度 Standard detection sensitivity	铁球直径(Φmm) Diameter of the iron ball	≥0.6	≥0.8	≥1.0	≥1.2	≥1.5	≥2.0	≥2.5	≥3.0
	铜铝等非铁金属直径(Φmm) Diameter of non-ferrous metals such as copper and aluminum	≥1.2	≥1.2	≥1.5	≥1.5	≥2.5	≥3.0	≥4.0	≥4.5
	304不锈钢球直径 Diameter of 304 stainless steel ball	≥1.2	≥1.5	≥2.0	≥2.0	≥2.5	≥3.0	≥4.0	≥4.5
报警方式/Alarm method	检测到金属异物自动停止运行，蜂鸣器报警(可选配剔除机构) Upon detecting a metal foreign object, the operation will automatically stop, and the buzzer will sound an alarm (a removal mechanism can be optionally equipped)								
操作方式/Operation method	触摸按键输入(触摸可选)/Touch button input (touch optional)								
整机材质/Whole machine material	不锈钢 304，符合 HACCP.GMP.CAS 等标准 Stainless steel 304, compliant with HACCP, GMP, CAS and other standards								
电源/Power	AC200V±10% 50-60HZ(可定制 AC110V或 AC380V)其他可选 AC200V±10% 50-60HZ (customizable to AC110V or AC380V) with other options available								

注* 1.探头检测窗口，整机尺寸可根据客户需要定做，检测窗口高度越高，检测灵敏度越低同时检测窗口增宽，检测灵敏度也会降低。
2.检测灵敏度是将检测卡放在输送带中央通过检测通道所得出的检测灵敏度，实际检测灵敏度根据被测产品或使用条件的不同将会有所差异。
note*1.The probe detection window and overall dimensions of the machine can be customized according to customer needs. The higher the detection window, the lower the detection sensitivity, and the wider the detection window, the lower the detection sensitivity.
2.The detection sensitivity is determined by placing the detection card in the center of the conveyor belt and passing it through the detection channel. The actual detection sensitivity may vary depending on the product being tested or the usage conditions.

Aluminum foil metal detection machine 铝箔金属检测机



产品特点

- ①应用于铝箔或镀膜包装的产品
- ②37米/分钟高速检测，误报率 < 0.1%
- ③输送剔除系统灵活适配，支持防水防爆防尘防震等严苛场景
- ④7英寸触控屏+一键自学习，无需调试快速上手，支持多语言切换
- ⑤SUS304镜面机身+无死角卡扣
- ⑥208+产品参数记忆功能，无缝切换多品类生产线

Product Features

- Products applied to aluminum foil or aluminum plated film packaging
- High-speed detection at 37 meters per minute, with a false alarm rate of less than 0.1%
- The conveying and removal system is flexibly adaptable and supports harsh environments such as waterproof, explosion-proof, dust-proof, and shock-proof scenarios
- 7-inch touch screen + one-click self-learning, no need for debugging, quick start, supports multi-language switching
- SUS304 mirror-finished body + no-dead-angle buckle
- 208+product parameter memory function, seamless switching between multi category production lines

产品技术参数/Product technical parameters

型号DD-220系列/Model DD-220 series	3008	3012	4008	4010	4012	4015	4020	4025	
检测通道宽度(mm)/Detect channel width	300可定制/300 customizable								
检测通道高度(mm)/Detect channel height	100	120	150	200	250	300	350	400	
标准空机检测灵敏度 Standard empty machine detection sensitivity	磁性球(Φmm) magnetic ball(Φmm)	0.6	0.8	1.0	1.2	1.5	2.0	2.5	3.0
	不锈钢球(Φmm) stainless steel ball(Φmm)	2.5	2.5	2.5	3.0	3.0	3.5	3.5	3.5
整机尺寸/Overall dimensions	1400×780×950 (L×W×H)								
电源/Power	220V 50Hz								
输送带速度/Conveyor belt speed	26米/分钟/26m/minute								
承重力/load-bearing capacity	5kg之内/Within 5kg								
操作方式/Operation method	触摸屏触摸操作/Touch screen touch operation								
剔除方式/Whole machine material	自动停机倒退并声光报警 (可选配剔除机构) Automatic shutdown, reverse and audible and visual alarm (optional removal mechanism)								
整机材质/Whole machine material	不锈钢 304，符合 HACCP.GMP.CAS 等标准 Stainless steel 304, compliant with HACCP, GMP, CAS and other standards								
皮带离地高/Belt height above ground	700mm (+100mm脚杯可调) /700mm (+100mm adjustable foot cup)								

注* 以上灵敏度参数为空机无环境干扰时测试结果,实际应用会因使用环境及被检测物体成份因素干扰而略有不同!
note*The above sensitivity parameters are test results when there is no environmental interference on the aircraft. Actual applications may vary slightly due to interference from the usage environment and the composition of the detected object!

Metal separator 金属分离机

金属分离机
Metal separator



产品特点

- ①高敏抗干扰探头, 0.3mm全金属 (铁/不锈钢等) 杂质100%检出, 信号强度实时可视化
- ②15秒快速适配不同物料, 存储200组参数, 换料无需重复校准
- ③LCD显示物理按键, 记录1500条检测数据, 支持5级权限管理
- ④可集成到产线或独立使用, 标配支架+下料斗, 支持定制
- ⑤配套自动上料系统, 实现金属杂质的自动分离
- ⑥有效防止金属杂质进入下游设备, 可对接注塑机、包装机等

Product Features

- High sensitivity anti-interference probe, 100% detection of impurities in 0.3mm all metal (iron/stainless steel, etc.), real-time visualization of signal strength
- Quickly adapt to different materials in 5 seconds, store 200 sets of parameters, and do not require repeated calibration for material replacement
- LCD displays physical buttons, records 1500 detection data, supports 5-level permission management
- Can be integrated into the production line or used independently, standard bracket+hopper, supports customization
- Equipped with an automatic feeding system to achieve automatic separation of metal impurities
- Effectively prevent metal impurities from entering downstream equipment, compatible with injection molding machines, packaging machines, etc

产品技术参数/Product technical parameters

产品型号/Product model	HC-700-25	HC-700-30	HC-700-50	HC-700-70	HC-700-100	
下料口径/Cutting diameter	Φ25mm	Φ30mm	Φ50mm	Φ70mm	Φ100mm	
过料量/Material throughput	250KG/Hr	300~400KG/Hr	700~800KG/Hr	1000~1500KG/Hr	3000~5000KG/Hr	
电压/voltage	220V,50/60Hz					
压缩空气/compressed air	3Bar~6Bar					
工作温度/Operating Temperature	-10°C~+80°C					
排料时间/Operating Temperature	0.3-5秒可调 Adjustable from 0.3-5 seconds					
下料速度/Cutting speed	自由下落 free fall					
检测精度 detection accuracy	FE	0.1~0.2mm	0.2~0.3mm	0.3mm	0.5mm	0.8mm
	SUS	0.2mm	0.3~0.4mm	0.5~0.6mm	0.8~1.0mm	0.8~1.0mm

注* 最高检重速度和检重精度, 根据实际被检测产品和安装环境的不同而有所不同。
选型注意产品在皮带线上的运动方向, 产品透明或半透明物请与我司联系。
note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.
Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Standard bag inspection X-ray foreign object detection machine 标准型袋装检测 X光异物检测机

X光检测机
X-ray inspection machine



产品特点

- ①可检测包装产品内的异物, 以及包装产品的封口完整性(夹料或破损)提供多种剔除方式, 满足各类产品的定制需求。
- ②基于Sooview的独有ZeroShot-SvDetector深度学习算法, 定制开发了适用于各类包装产品的异物检测解决方案。
- ③具有4G无线网络、有线网络多种连接方式, 可远程快速技术支持和操作。
- ④Ai一眼识别异物、夹料、破袋自动剔除坏品, 中小包装通用性能稳定, 易维护
- ⑤可检测异物(金属、玻璃、陶瓷、石子、橡胶及硬质塑料等多类异物)。

Product Features

- It can detect foreign objects inside packaged products and ensure the integrity of the packaging seal. It provides multiple removal methods to meet the customization needs of various products.
- Based on Sooview's unique ZeroShot SvDetector deep learning algorithm, a customized foreign object detection solution suitable for various packaging products has been developed.
- Multiple connection methods for remote and fast technical support and operation.
- Adopting multi row pixel and high-resolution imaging technology; Can meet various needs and requirements
- Can detect foreign objects such as metal, glass, ceramics, stones, rubber, and hard plastics.

产品技术参数/Product technical parameters

型号/Mode	XSS-2410	XSS-4016	XSS-6030	XSS-6040	XSS-7040
X射线源(单位: W)/Radiation source (unit: W)	210	240	240/350		350
探测器分辨率/Detector resolution	0.4mm(空载,受检材影响实际精度以检测为准) 0.4mm (empty load, actual accuracy affected by the test material subject to inspection)				
空机检测精度/Empty machine detection accuracy	sus球0.4mm玻璃1.0mm陶瓷1.0mmsus线0.2*5mm Sus ball: 0.4mm Glass: 1.0mm Ceramic: 1.0mm Sus wire: 0.2 * 5mm				
操作软件/Operating software	自研Sooview检测软件/Self developed Sooview detection software				
人机交互/Human-Computer Interaction	21.5寸触摸屏/21.5-inch touch screen				
输送机速度/Conveyor speed	10-60 m/min				
待检产品重量/Weight of products awaiting inspection	<10Kg				
待检产品尺寸/ Dimensions of the product to be inspected	240*50mm	400*120mm	600*200mm	600*300mm	700*300mm
电源/Power supply	AC 220V2.0kw50hz				
温度、湿度/temperature, humidity	环境温度0~45°C,相对湿度30~85%不结露 Environmental temperature 0~45 ° C, relative humidity 30~85%, no condensation				
防水等级/waterproof rating	输送机为IP66,其他部分为IP54/The conveyor is IP66, and other parts are IP54				
整机材质/Whole machine material	304不锈钢, 拉丝/304 stainless steel, brushed				

High precision bag detection X-ray foreign object detection machine 高精度型袋装检测 X光异物检测机

X光检测机



产品特点

- ①采用多行0.2/0.4mm高分辨率的探测器，可满足更高检测精度或产线速度下的高精度检测需求。
- ②基于Sooview的独有ZeroShot-SvDetector深度学习算法，定制开发了适用于各类包装产品的异物检测解决方案。
- ③具有4G无线网络、有线网络多种连接方式，可远程快速技术支持和操作。
- ④采用多行像素，高分辨率成像技术，可满足更高检测精度或更高产线速度下的高精度检测要求。
- ⑤可检测异物（金属、玻璃、陶瓷、石子、橡胶及硬质塑料等多类异物）。

Product Features

- The use of multi row 0.2/0.4mm high-resolution detectors can meet the detection requirements of higher detection accuracy or production line speed.intelligent algorithm, automatic identification,
- Based on Sooview's unique ZeroShot SvDetector deep learning algorithm, a customized foreign object detection solution suitable for various packaging products has been developed.
- Multiple connection methods for remote and fast technical support and operation.
- Adopting multi row pixel and high-resolution imaging technology; Can meet various needs and requirements
- Can detect foreign objects such as metal, glass, ceramics, stones, rubber, and hard plastics.

产品技术参数/Product technical parameters

型号/Mode	XSS-2410	XSS-4016	XSS-6030	XSS-6040	XSS-7040
X射线源(单位: W)/Radiation source (unit: W)	最大 150w/210w/240/240/350w可选 Maximum 150w/210w/240/240/350w optional				
探测器分辨率/Detector resolution	0.4mm(空载,受检材影响实际精度以检测为准) 0.4mm (empty load, actual accuracy affected by the test material subject to inspection)				
空机检测精度/Empty machine detection accuracy	sus球0.4mm玻璃1.0mm陶瓷1.0mmsus线0.2*5mm Sus ball: 0.4mm Glass: 1.0mm Ceramic: 1.0mm Sus wire: 0.2 * 5mm				
操作软件/Operating software	自研Sooview检测软件/Self developed Sooview detection software				
人机交互/Human-Computer Interaction	21.5寸触摸屏/21.5-inch touch screen				
输送机速度/Conveyor speed	10-60 m/min				
待检产品重量/Weight of products awaiting inspection	<10Kg				
待检产品尺寸/ Dimensions of the product to be inspected	240*50mm	400*120mm	600*200mm	600*300mm	700*300mm
电源/Power supply	AC 220V2.0kw50hz				
温度、湿度/temperature, humidity	环境温度0~45°C,相对湿度30~85%不结露 Environmental temperature 0~45 ° C, relative humidity 30~85%, no condensation				
防水等级/waterproof rating	输送机为IP66,其他部分为IP54/The conveyor is IP66, and other parts are IP54				
整机材质/Whole machine material	304不锈钢, 拉丝/304 stainless steel, brushed				

Positive and negative sorting scale 正反转选别秤

正反转选别秤

适用于积木、五金配件
以及相关产品的不良品
筛选

Suitable for screening defective
products of building blocks,
hardware accessories, and
related products



产品特点

- ①触摸屏人机对话，全智能化、人性化设计
- ②快速皮带更换系统；采用搭扣设计，皮带清洁简便
- ③304全不锈钢材质，IP65防护等级
- ④多达10个快捷菜单，无缝对接换产品，实现不停机切换产品
- ⑤提供生产趋势反馈信号，调整上游包装机包装精度，提高用户满意度，降低成本

Product Features

- Touchscreen human-machine dialogue, fully intelligent and humanized design
- Quick belt replacement system; Adopting a buckle design, the belt is easy to clean
- 304 all stainless steel material, Ip65 protection level
- Up to 10 shortcut menus seamlessly connect to product switching, achieving non-stop product switching
- Tprovide feedback signals on production trends, adjust the packaging accuracy and satisfaction of upstream packaging machines, and reduce costs



产品技术参数/Product technical parameters

产品型号/Product model	SC1-C-3523L1	存储配方/Storage formula	100种
显示分度/Display division	0.01g	检测速度/Detection speed	1-35包/分钟 1-35 packs/minute
检重范围/Inspection weight range	1-1000g	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.02-0.1g	机壳材质/Shell material	不锈钢304 Stainless steel 304
称重段尺寸/Size of weighing section	L 350mm*W 230mm	数据输送/data transmission	USB数据导出 USB data export
适检产品尺寸/Suitable product size	L≤300mm; W≤200mm	检重段数/Sorting section	标准1段, 可选2段 Standard 1 section, optional 2 sections
剔除方式/Elimination method	正反转选别 Positive and negative sorting		
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。
选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。
note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.
Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Dynamic selection scale for traditional Chinese medicine decoction pieces

中药饮片动态选别秤

正反转选别秤
Positive and negative sorting scale series



产品特点

- ①触摸屏人机对话，全智能化、人性化设计
- ②快速皮带更换系统；采用搭扣设计，皮带清洁简便
- ③304全不锈钢材质，IP65防护等级
- ④多达10个快捷菜单，无缝对接换产品，实现不停机切换产品
- ⑤提供生产趋势反馈信号，调整上游包装机包装精度，提高用户满意度，降低成本

Product Features

- Touchscreen human-machine dialogue, fully intelligent and humanized design
- Quick belt replacement system; Adopting a buckle design, the belt is easy to clean
- 304 all stainless steel material, Ip65 protection level
- Up to 10 shortcut menus seamlessly connect to product switching, achieving non-stop product switching
- Tprovide feedback signals on production trends, adjust the packaging accuracy and satisfaction of upstream packaging machines, and reduce costs

产品技术参数/Product technical parameters

产品型号/Product model	SC1-C-3016L2	存储配方/Storage formula	100种
显示分度/Display division	0.02g	检测速度/Detection speed	1-70包/分钟 1-70 packs/minute
检重范围/Inspection weight range	1-500g	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.06-1g	机壳材质/Shell material	不锈钢304 Stainless steel 304
称重段尺寸/Size of weighing section	L 300mm*W 160mm	数据输送/data transmission	USB数据导出 USB data export
适检产品尺寸/Suitable product size	L≤180mm; W≤150mm	检重段数/Sorting section	标准2段 Standard 2 section
剔除方式/Elimination method	正反转选别 Positive and negative sorting		
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。
选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。
note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.
Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Swing arm type weight sorting scale

摆臂式重量分选机

分选秤系列
Sorting scale series

产品特点

- ①触摸屏人机对话，全智能化、人性化设计
- ②三级操作权限管理，支持自设密码
- ③多级分选自动称重，替代人工，提高效率
- ④采用变频控制电机，速度可根据需要调节
- ⑤防水防潮结构设计，从容应对高湿度恶劣环境，方便清洁

Product Features

- Touchscreen human-machine dialogue, fully intelligent and humanized design
- Three level operation permission management, supporting self setting passwords
- Multi level sorting automatic weighing, replacing manual labor and improving efficiency
- Adopting variable frequency control motor, the speed can be adjusted according to needs
- Waterproof and moisture-proof structural design, capable of handling high humidity and harsh environments with ease, convenient for cleaning



产品技术参数/Product technical parameters

产品型号/Product model	SWSS-5012L2	存储配方/Storage formula	100种
显示分度/Display division	0.1g	皮带速度/Belt speed	5-90米/分钟 5-90m/minute
检重范围/Inspection weight range	1-2000g	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.3-2g	机壳材质/Shell material	不锈钢304 Stainless steel 304
称重段尺寸/Size of weighing section	L 500mm*W 120mm	数据输送/data transmission	USB数据导出 USB data export
适检产品尺寸/Suitable product size	L≤350mm; W≤120mm	分拣口数/Sorting port number	1-20个可选 1-20 optional
剔除方式/Elimination method	气吹式、推杆式、拨杆式、上下翻板、转盘式可选 Air blown, push rod, toggle, flip up and down, and turntable are optional		
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。
选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。
note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.
Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Swing arm type weight sorting scale 双层式海鲜称重分选机

产品特点

- ①触摸屏人机对话，全智能化、人性化设计
- ②304全不锈钢材质，IP65防水等级，食品级托盘
- ③多级分选自动称重，替代人工，提高效率
- ④采用变频控制电机，速度可根据需要调节
- ⑤三级操作权限管理，支持自设密码

Product Features

- Touchscreen human-machine dialogue, fully intelligent and humanized design
- 304 all stainless steel material, IP65 waterproof rating, food grade tray
- Multi level sorting automatic weighing, replacing manual labor and improving efficiency
- Adopting variable frequency control motor, the speed can be adjusted according to needs
- Three level operation permission management, supporting self setting passwords



产品技术参数/Product technical parameters

产品型号/Product model	SWSD-4523L2	存储配方/Storage formula	100种
显示分度/Display division	0.1g	皮带速度/Belt speed	5-90米/分钟 5-90m/minute
检重范围/Inspection weight range	1-2000g	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.3-2g	机壳材质/Shell material	不锈钢304 Stainless steel 304
称重段尺寸/Size of weighing section	L 450mm*W 230mm	数据输送/data transmission	USB数据导出 USB data export
适检产品尺寸/Suitable product size	L≤300mm; W≤230mm	分拣口数/Sorting port number	1-20个可选 1-20 optional
剔除方式/Elimination method	气吹式、推杆式、拨杆式、上下翻板、转盘式可选 Air blown, push rod, toggle, flip up and down, and turntable are optional		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。
选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。
note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.
Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Disc type weight sorting machine 圆盘式重量分选机

产品特点

- ①触摸屏人机对话，全智能化、人性化设计
- ②304全不锈钢材质，IP65防水等级，食品级托盘
- ③多级分选自动称重，替代人工，提高效率
- ④采用变频控制电机，速度可根据需要调节
- ⑤三级操作权限管理，支持自设密码

Product Features

- Touchscreen human-machine dialogue, fully intelligent and humanized design
- 304 all stainless steel material, IP65 waterproof rating, food grade tray
- Multi level sorting automatic weighing, replacing manual labor and improving efficiency
- Adopting variable frequency control motor, the speed can be adjusted according to needs
- Three level operation permission management, supporting self setting passwords



产品技术参数/Product technical parameters

产品型号/Product model	SWSR-750TC6	存储配方/Storage formula	100种
显示分度/Display division	0.1g	皮带速度/Belt speed	1-300米/分钟 1-300m/minute
检重范围/Inspection weight range	1-200g	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.3-2g	机壳材质/Shell material	不锈钢304 Stainless steel 304
料盘尺寸/Tray size	145×70×50mm	数据输送/data transmission	USB数据导出 USB data export
适检产品尺寸/Suitable product size	L≤100mm; W≤65mm	分拣口数/Sorting port number	6-20个可选 6-20 optional
剔除方式/Elimination method	翻斗分选 Tipping bucket sorting		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。
选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。
note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.
Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.


Drum type inkjet weighing machine 滚筒式喷码称重机

产品特点

- ① 触控式启动/停止按钮
- ② 上、下限重量参数任意设定
- ③ 可选停车检重或连续秤重，产品异常时推杆剔除、声光报警
- ④ 中文触控界面、多组配方保存、密码权限管理、中文称重记录、智能故障检测等
- ⑤ 可按客户要求非标定制

Product Features

- Touch sensitive start/stop button
- The upper and lower weight parameters can be set arbitrarily
- Optional parking weight inspection or continuous weighing, push rod removal in case of product abnormalities, sound and light alarm Chinese touch interface, multiple formula saving, password permission management
- Chinese weighing records, intelligent fault detection, etc
- Non standard customization can be carried out according to customer requirements

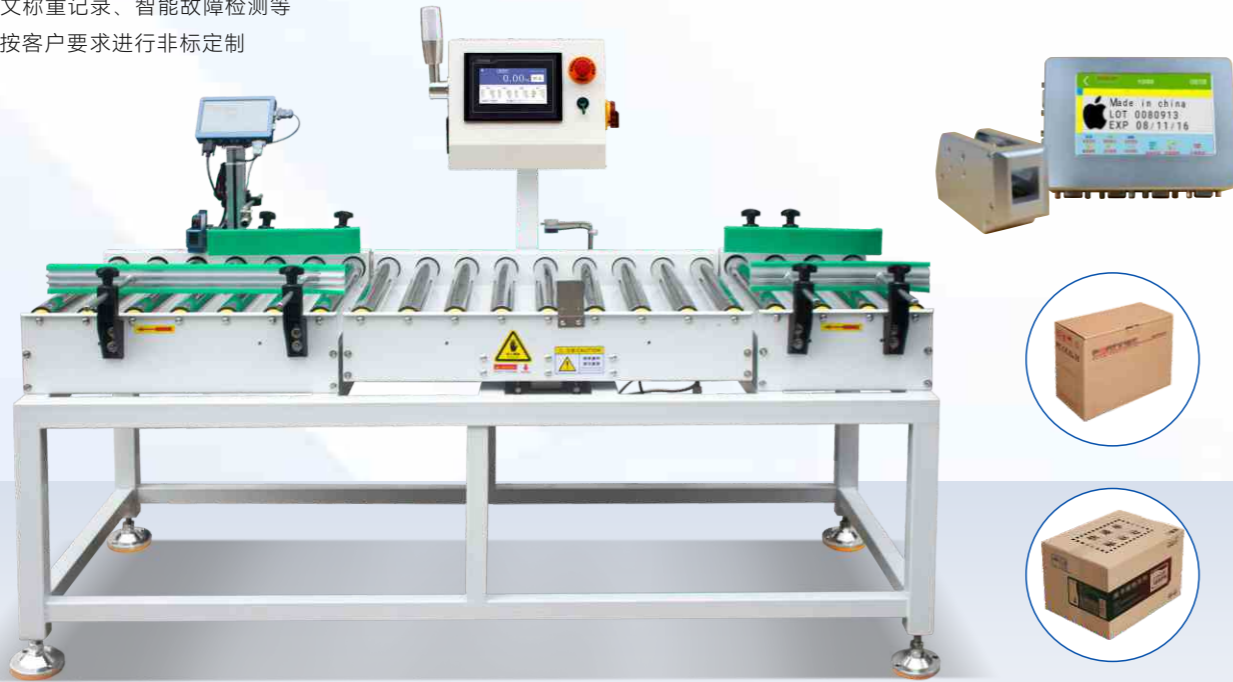

产品技术参数/Product technical parameters

产品型号/Product model	SCI	存储配方/Storage formula	100种
显示分度/Display division	0.1g	皮带速度/Belt speed	5-60米/分钟 5-60m/min
检重范围/Inspection weight range	1-30kg	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±10-30g	机壳材质/Shell material	碳钢喷漆 Carbon steel spray painting
称重段尺寸/Size of weighing section	L 1000mm*W 600mm	数据输送/data transmission	USB数据导出 USB data export
适检产品尺寸/Suitable product size	L≤750mm; W≤600mm	检重段数/Sorting section	标准1段, 可选3段 Standard 1 section, optional 3 sections
喷印字符高度/Printing character height	1.25-7mm		
剔除方式/Elimination method	推杆式、下滑式、顶升移栽可选 Push rod type, slide type, jack up transplanting optional		
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。

选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.

Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Assembly line checkweigher 精密流水线在线检重秤

产品特点

- ① 触控式启动/停止按钮
- ② 上、下限重量参数任意设定
- ③ 可选停车检重或连续秤重，产品异常时推杆剔除、声光报警
- ④ 中文触控界面、多组配方保存、密码权限管理、中文称重记录、智能故障检测等
- ⑤ 可按客户要求非标定制
- ⑥ 直接架流水线中间，省人省空间

Product Features

- Touch sensitive start/stop button
- The upper and lower weight parameters can be set arbitrarily
- Optional parking weight inspection or continuous weighing, push rod removal in case of product abnormalities, sound and light alarm Chinese touch interface, multiple formula saving, password permission management
- Chinese weighing records, intelligent fault detection, etc
- Non standard customization can be carried out according to customer requirements Directly install in the middle of the assembly line, saving manpower and space



产品技术参数/Product technical parameters

产品型号/Product model	SC-PR-4530L3	存储配方/Storage formula	100种
显示分度/Display division	0.1g	皮带速度/Belt speed	5-40米/分钟 5-40m/min
检重范围/Inspection weight range	1-3000g	电源/power supply	AC220V±10%
检重精度/Weight checking accuracy	±0.5-2g	机壳材质/Shell material	碳钢喷漆 Carbon steel spray painting
称重段尺寸/Size of weighing section	L 450mm*W 300mm	数据输送/data transmission	USB数据导出 USB data export
适检产品尺寸/Suitable product size	L≤750mm; W≤600mm	检重段数/Sorting section	标准2段, 可选3段 Standard 2 section, optional 3 sections
剔除方式/Elimination method	推杆式、拨杆式可选 Push rod type and paddle type optional		
可选功能/Optional Features	实时打印、读码分拣、在线喷码、在线读码、在线贴标 Real time printing, code reading and sorting, online code spraying, online code reading, and online labeling		

注* 最高检重速度和检重精度，根据实际被检测产品和安装环境的不同而有所不同。

选型注意产品在皮带线上的运动方向，产品透明或半透明物请与我司联系。

note*The maximum speed and precision of weight checking vary according to the actual products and installation environment.

Type selection should pay attention to the movement direction of the product on the belt line. For transparent or translucent products, please contact us.

Assembly line checkweigher 更多定制机型



Automatic weighing, visual positioning,
instant printing and labeling machine
**自动称重、视觉定位、
即时打印贴标机**

产品简介

解决产品包装完成后的复检工序，一机多用，通过视觉相机定位贴标位置，自动与重量信息绑定，打印贴标，有效的减少了人工工作量，提高生产效率。

Product Introduction

It solves the re inspection process after the product packaging is completed. One machine can be used for multiple purposes. It can locate the labeling position through the visual camera, automatically bind with the weight information, print and label, effectively reduce the manual workload and improve the production efficiency.

Three-axis instant printing labeling machine 三轴式即时打印贴标机

产品简介

三轴即时打印贴标机，主要针对工厂，场地空间小，有效解决普通机：型占地空间大的问题，贴标范围广，灵活切换产品。

Product Introduction

It solves the re inspection process after the product packaging is completed. One machine can be used for multiple purposes. It can locate the labeling position through the visual camera, automatically bind with the weight information, print and label, effectively reduce the manual workload and improve the production efficiency.



Automatic weighing and labeling system service packaging line 自动称重贴标系统服务包装线

产品简介

- ①记忆存储功能，可存储100组参数
- ②动态生成条形码/二维码，打印速度可调节
- ③支持MES、ERP系统对接，配送中心计算价格等
- ④集成打印贴标机模板编辑软件，贴标内容可任意编辑
- ⑤本产品机头可上下调节位置，适合不同的产线
- ⑥多种贴标方式可选择，满足不同场合或不同物品的即印贴标需求

Product Introduction

- Memory storage function, capable of storing 100 sets of parameters
- Dynamically generate barcodes/QR codes, with adjustable printing speed
- Support MES, ERP system integration, distribution center price calculation, etc
- Integrated printing and labeling machine template editing software, labeling content can be edited freely
- The machine head of this product can be adjusted up and down, suitable for different production lines
- Multiple labeling methods are available to meet the labeling needs of different occasions or objects



Logistics static weighing printer 物流静态称重打印机

产品简介

主要用于电商仓库小包裹的自动称重，针对一些品种多数量，不统一的物流出库流程作业配备自动打印机，人工贴标。

Product Introduction

It is mainly used for the automatic weighing of small parcels in e-commerce warehouses. It is equipped with automatic printers and manual labeling for some varieties, large quantities, and non-uniform logistics outbound processes.

Explosion proof scale

防爆秤

产品简介

广泛应用于对防爆环境有严格要求的化工、食品、气体、石油等行业;针对爆炸性气体、可燃性粉尘、腐蚀性液体,有效地减少人工接触,让生产厂家把控质量的同时还保证人员安全,而且该机占地小作用多。

Product Introduction

Widely used in chemical, food, gas, petroleum and other industries with strict requirements for explosion-proof environment; Aiming at explosive gas, combustible dust and corrosive liquid, it effectively reduces manual contact, enables the manufacturer to control the quality while ensuring the safety of personnel, and the machine occupies a small area and has many functions.



Dynamic code spraying weighing scale
动态喷码检重秤

产品简介

主要应用于包装后期的高精度称重输送环节,光电感应器自动喷码动态称重剔除不达标产品,搭配流水线实现自动工作,无需人工喷码,提高工作效率。

Product Introduction

It is mainly used in the high-precision weighing and conveying link in the later stage of packaging. The photoelectric sensor automatically sprays code, and the dynamic weighing removes unqualified products. It is matched with the assembly line to realize automatic work without manual code spraying and improve work efficiency.



Multi function elimination
shunt check weight scale
多功能剔除分流检重秤

产品简介

拥有推杆、拨杆和气吹三种剔除装置,主要用于多线合流的食物、药品、日用品后段包装线中有效的节约场地分摊多线合流的复检量。

Product Introduction

It has three kinds of elimination devices, namely, push rod, shift rod and air blowing, which are mainly used to effectively save space in the packaging line of food, medicine and daily necessities in the back section of the multi-line confluence and share the re-inspection amount of the multi-line confluence.



Dual channel dynamic check scale
双通道动态检重秤

产品简介

主要用于多线合流的食物、药品、日用品后段包装线中有效的节约场地分摊多线合流的复检量。

Product Introduction

It is mainly used for multi-line combined food, medicine, and daily necessities packaging lines to effectively save space and share the multi-line combined re-inspection amount.



PACKING MACHINE SERIES 包装机系列

Weighing and counting packaging machine
称重计数包装机



产品简介

应用范围:适合螺丝、五金汽车配件等金属配件产品的定量称量:
1.高精度数字传感器精度可达0.19, 称量范围可达1-5kg;
2.全自动上料, 计量, 充填制袋, 标签打码, 输送物料一条线完成

Product Introduction

Application scope: Suitable for quantitative weighing of metal accessory products such as screws, hardware, and automotive parts
1. High precision digital sensors can achieve an accuracy of 0.19 and a weighing range of 1-5kg;
2. Fully automatic feeding, measuring, filling and bag making, label coding, and material conveying are completed in one line

产品技术参数/Product technical parameters

型号/Model	SCP-35	控制系统/Control system	PLC
单次称重范围/Range of single bag weight	200g-5kg	预设参数/Preset programs	500
称量精度范围/Range of weighing accuracy	0.5-10g	电源/power supply	AC220V*10% 50HZ/60HZ
最高速度/Max speed	4-6包 4-6bags	显示屏/Display screen	10英寸彩显触摸屏 10inch display screen
料斗容量/Hopper capacity	5L		

Testing packaging samples 检测包装样品图



WEIGHT EXCLUSION METHOD(CUSTOMIZABLE) 称重剔除方式(可定制)

01



单摆臂剔除
Remove the lever

通过摆臂来剔除异物产品，适用于较厚袋装、盒装、小箱装产品超重偏轻共用一个剔除装置

Using a swing arm to remove foreign object products, suitable for thicker bagged, boxed, and small boxed products that are overweight or light, sharing a single removal device

02



双摆臂剔除
Double swing arm removal

通过摆臂来剔除异物产品，适用于较厚袋装、盒装、小箱装产品超重偏轻分开剔除

Using a swing arm to remove foreign objects from products, suitable for separating overweight and light products in thicker bags, boxes, and small boxes

03



推杆剔除
Push rod removal

气缸推板迅速运动分离不合格产品大多数盒装、包装厚的产品基本都适用，通常是设备的标配。

The rapid movement of the cylinder push plate separates unqualified products. Most boxed and thick packaged products are basically suitable and are usually standard equipment.

04



气吹剔除
Air blowing removal

利用强气流吹动分离不合格产品适合高速小包物、轻巧物品

Using strong airflow to separate unqualified products is suitable for high-speed small packages and lightweight items

05




翻板剔除
Flip board removal

通过挡板张开方式剔除异物产品适用于薄片体积小的小包装产品，速度相对慢

Removing foreign objects by opening the baffle is suitable for small packaging products with small sheet volume, and the speed is relatively slow

06

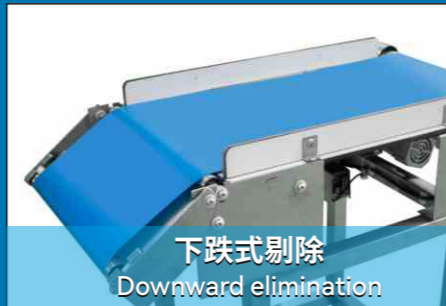

下跌式剔除
Downward elimination

适用于片状、较薄的产品，不会卡料，速度快

Suitable for sheet and thin products, no jamming, fast speed

07



滚筒剔除
Drum removal

适用于箱装、袋装、桶装等重物产品，因滚筒表面坚硬，需产品包装坚固、不易变形。

Suitable for heavy products such as boxed, bagged, and barreled products. Due to the hard surface of the drum, the product packaging needs to be sturdy and not easily deformed.

08



报警停机
Alarm shutdown

检测到不合格品时触发警报并停止生产线，由人工手动移除问题产品。

When non-conforming products are detected, an alarm is triggered and the production line is stopped, and the problematic products are manually removed.

About

检测设备报警输出信号给自动剔除系统，剔除装置接到信号后完成剔除动作。客户可根据产品的尺寸、类型和包装来选择合适的剔除系统。

The alarm output signal of the detection equipment is sent to the automatic rejection system, and the rejection device completes the rejection action after receiving the signal. Customers can choose the appropriate removal system based on the size, type, and packaging of the product.

Peripherals that can be connected to the weighing scale 检重系统多种外接交互模式



远程启停
Remote start and stop



MES系统
MES system

支持的硬件接口:
以太网口 (RJ45)
无线WIFI
RS232
RS485
开关量



多机联网
Multi computer networking

支持的软件协议:
自定义协议
MODBUS TCP
MODBUS RTU



包装机
Packer



喷码机
Inkjet printer

Supported hardware interfaces:
Ethernet port (RJ45)
Wireless WIFI
RS232
RS485
Switching value



扫码头
Scan barcode

Supported software protocols:
Custom Protocol
MODBUS TCP
MODBUS RTU



视觉检测
Visual inspection



打标机
Printer

