


OMS-96K314

ENERGY STORAGE BESS



OMS-112K314

ENERGY STORAGE BESS

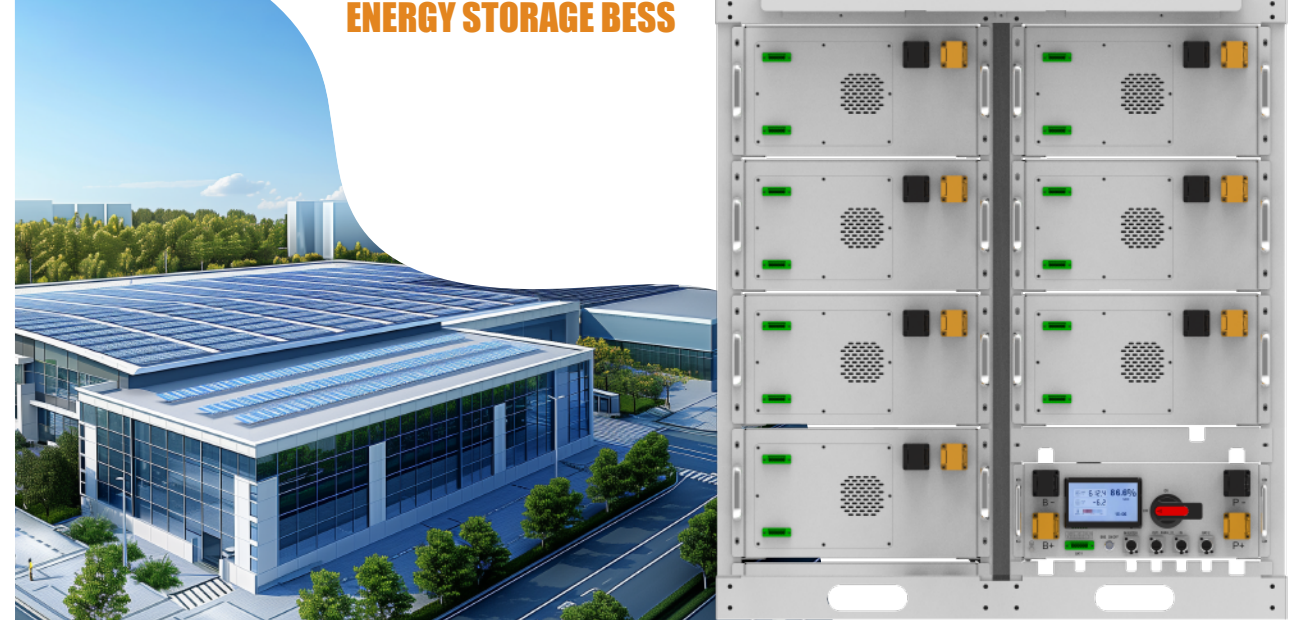

MODEL	OMS-96K314
Product	307.2V314AH
Nominal Voltage	307.2V
Nominal Capacity	314
Dimension mouldle(mm)	483*245*792mm*6
Dimension RACK(mm)	1090*780*1190
Weight(kg)	796
SPECIFICATIONS	PARAMETER
Nominal Capacity (KWH)	96.5
Cut-Off Voltage (V)	264
Charge Cut-Off Voltage (V)	340.8
Recommend Charge/Discharge Current (A)	100
Max. Charge/Discharge working Current(A)	160
Communication	RS485/RS232/CAN
Working Temperature	0°C~50°C Charge -10°C ~50°C Discharge
Transport or Storage Temperature Range	- 20°C~60°C
Certification	CE/IEC/UL/UN38.3/MSDS
Design Life	15years+
Cycle Life	(0.5C/0.5C-80% D0D) >6000 times
Series Function	Support 16 units in Series
Certification	UN38.3/MSDS/ROHS

MODEL	OMS-112K314
Product	358.4V314AH
Nominal Voltage	358.4V
Nominal Capacity	314
Dimension mouldle(mm)	483*245*792mm*7
Dimension RACK(mm)	1090*780*1190
Weight(kg)	912
SPECIFICATIONS	PARAMETER
Nominal Capacity (KWH)	112.5
Cut-Off Voltage (V)	308
Charge Cut-Off Voltage (V)	397.6
Recommend Charge/Discharge Current (A)	100
Max. Charge/Discharge working Current(A)	160
Communication	RS485/RS232/CAN
Working Temperature	0°C~50°C Charge -10°C ~50°C Discharge
Transport or Storage Temperature Range	- 20°C~60°C
Certification	CE/IEC/UL/UN38.3/MSDS
Design Life	15years+
Cycle Life	(0.5C/0.5C-80% D0D) >6000 times
Series Function	Support 16 units in Series
Certification	UN38.3/MSDS/ROHS