


# OMS-193K314

## ENERGY STORAGE BESS

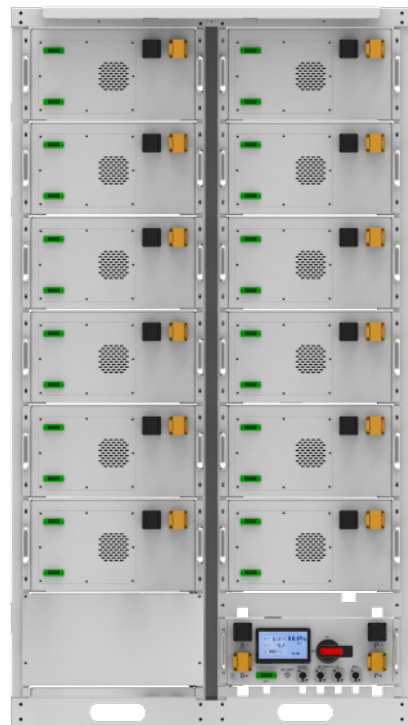

MODEL	OMS-193K314
Product	614.4V314AH
Nominal Voltage	614.4V
Nominal Capacity	314
Dimension module(mm)	483*245*792mm*12
Dimension RACK(mm)	1090*780*1940
Weight(kg)	1552
SPECIFICATIONS	PARAMETER
Nominal Capacity (KWH)	192.9
Cut-Off Voltage (V)	528
Charge Cut-Off Voltage (V)	681.6
Recommend Charge/Discharge Current (A)	100
Max. Charge/Discharge working Current(A)	160
Communication	RS485/RS232/CAN
Working Temperature	0°C~50°C Charge -10°C ~50°C Discharge
Transport or Storage Temperature Range	- 20°C~60°C
Certification	CE/IEC/UL/UN38.3/MSDS
Design Life	15years+
Cycle Life	( 0.5C/0.5C-80% DOD ) >6000 times
Series Function	Support 16 units in Series
Certification	UN38.3/MSDS/ROHS

# OMS-209K314

## ENERGY STORAGE BESS



MODEL	OMS-209K314
Product	665.6V314AH
Nominal Voltage	665.6V
Nominal Capacity	314
Dimension module(mm)	483*245*792mm*13
Dimension RACK(mm)	1090*780*1940
Weight(kg)	1668
SPECIFICATIONS	PARAMETER
Nominal Capacity (KWH)	209
Cut-Off Voltage (V)	572
Charge Cut-Off Voltage (V)	738.4
Recommend Charge/Discharge Current (A)	100
Max. Charge/Discharge working Current(A)	160
Communication	RS485/RS232/CAN
Working Temperature	0°C~50°C Charge -10°C ~50°C Discharge
Transport or Storage Temperature Range	- 20°C~60°C
Certification	CE/IEC/UL/UN38.3/MSDS
Design Life	15years+
Cycle Life	( 0.5C/0.5C-80% DOD ) >6000 times
Series Function	Support 16 units in Series
Certification	UN38.3/MSDS/ROHS