



# OMS-225K314

## ENERGY STORAGE BESS

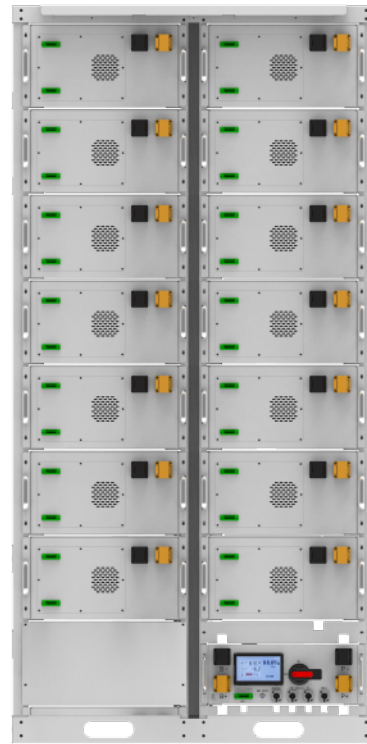

# OMS-225K314

## ENERGY STORAGE BESS

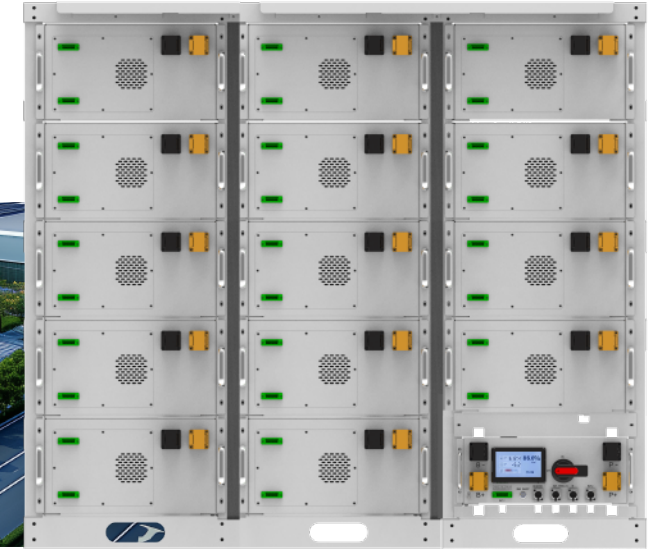

MODEL	OMS-225K314
Product	716.8V314AH
Nominal Voltage	716.8V
Nominal Capacity	314
Dimension module(mm)	483*245*792mm*14
Dimension RACK(mm)	1090*780*2190
Weight(kg)	1804
SPECIFICATIONS	PARAMETER
Nominal Capacity (KWH)	225.1
Cut-Off Voltage (V)	616
Charge Cut-Off Voltage (V)	795.2
Recommend Charge/Discharge Current (A)	100
Max. Charge/Discharge working Current(A)	160
Communication	RS485/RS232/CAN
Working Temperature	0°C~50°C Charge -10°C ~50°C Discharge
Transport or Storage Temperature Range	- 20°C~60°C
Certification	CE/IEC/UL/UN38.3/MSDS
Design Life	15years+
Cycle Life	( 0.5C/0.5C-80% DOD ) >6000 times
Series Function	Support 16 units in Series
Certification	UN38.3/MSDS/ROHS

MODEL	OMS-225K314
Product	716.8V314AH
Nominal Voltage	716.8V
Nominal Capacity	314
Dimension module(mm)	483*245*792mm*14
Dimension RACK(mm)	1650*780*1425
Weight(kg)	1804
SPECIFICATIONS	PARAMETER
Nominal Capacity (KWH)	225.1
Cut-Off Voltage (V)	616
Charge Cut-Off Voltage (V)	795.2
Recommend Charge/Discharge Current (A)	100
Max. Charge/Discharge working Current(A)	160
Communication	RS485/RS232/CAN
Working Temperature	0°C~50°C Charge -10°C ~50°C Discharge
Transport or Storage Temperature Range	- 20°C~60°C
Certification	CE/IEC/UL/UN38.3/MSDS
Design Life	15years+
Cycle Life	( 0.5C/0.5C-80% DOD ) >6000 times
Series Function	Support 16 units in Series
Certification	UN38.3/MSDS/ROHS