


# OMS-241K314

## ENERGY STORAGE BESS

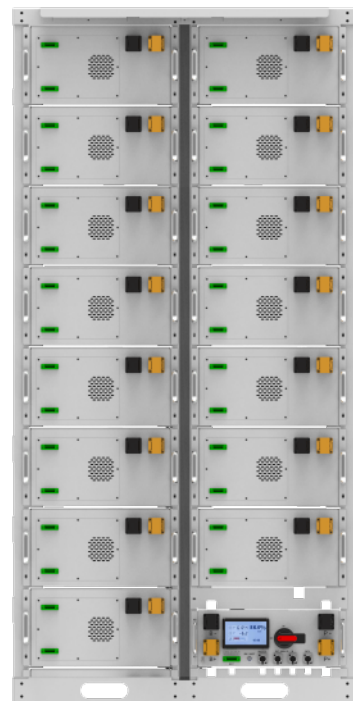

MODEL	OMS-241K314
Product	768V314AH
Nominal Voltage	768V
Nominal Capacity	314
Dimension module(mm)	483*245*792mm*15
Dimension RACK(mm)	1090*780*2190
Weight(kg)	1920
SPECIFICATIONS	PARAMETER
Nominal Capacity (KWH)	241.2
Cut-Off Voltage (V)	660
Charge Cut-Off Voltage (V)	852
Recommend Charge/Discharge Current (A)	100
Max. Charge/Discharge working Current(A)	160
Communication	RS485/RS232/CAN
Working Temperature	0°C~50°C Charge -10°C ~50°C Discharge
Transport or Storage Temperature Range	- 20°C~60°C
Certification	CE/IEC/UL/UN38.3/MSDS
Design Life	15years+
Cycle Life	( 0.5C/0.5C-80% DOD ) >6000 times
Series Function	Support 16 units in Series
Certification	UN38.3/MSDS/ROHS

# OMS-200K

## Integration of energy storage

