



山东梵达新材料有限公司

SHANDONG FANDA NEW MATERIALS CO.,LTD



COMPANY BROCHURE
山东佰妙新材料有限公司

SHANDONG BAIMIAO NEW MATERIALS CO., LTD



服务客户 · 诚信经营

SERVICE CUSTOMER CREDIT MANAGEMENT


山东佰妙新材料有限公司

Shandong Baimiao New materials Co., Ltd.

地址：山东省聊城市冠县工业园区振兴东路78号

电话：0635-2910555

山东·冠县



企业概况 CORPORATE PROFILE

山东佰妙新材料有限公司位于山东省聊城市冠县工业园区，公司主要产品为热镀锌卷，镀铝锌卷，彩涂卷，瓦楞板，FRP采光瓦，高速护栏板等。热镀锌卷厚度主要为0.12mm-0.7mm，宽度750mm-1250mm；瓦楞板分为镀锌瓦楞板、镀铝锌瓦楞板、彩钢瓦，厚度主要为0.12mm-0.7mm，宽度665mm，686mm，800mm，840mm，900mm，1025mm，1050mm等等；FRP采光瓦生产的厚度为0.40mm-3.0mm，透明的和带颜色的都可以生产；高速护栏板分为热镀锌护栏板和喷塑护栏板，两波或者三波护栏板，厚度2.5mm-4.3mm。

公司很秉承“以科技求发展，以信誉求生存”的精神，不断强化管理，视质量为企业生命，严格按照ISO9001：2000国际质量管理体系组织生产，确保了产品的高质量和优异性能。与此同时，公司不断加大投入，努力开发新产品以满足不同用户的需求，公司坚持“以人为本、品质为纲、创新高效”的宗旨，以一流水准竭诚服务于用户。

公司一贯坚持“质量第一，用户至上，优质服务，信守合同”的宗旨，凭借着高质量的产品，良好的信誉，优质的服务，产品畅销全国近三十多个省，市，自治区以及远销欧洲、非洲、东南亚、中东、南美等各个国家。竭诚与国内外商家双赢合作，共同发展，共创辉煌。

SHANDONG BAIMIAO is located in beautiful Liaocheng city, Shandong Province of China. We start our export business in 2007 year. We covers an area of 53,000m² and the export value is about USD 50 million in 2020 year.

Our company has more than 200 employees, including 16 senior engineers and 41 specialized backbone technicians.

We mainly produce and supply hot dipped Galvanized steel coils, Galvalume coils, PPGI steel coils, Corrugated steel sheet, FRP plastic roofing sheet and highway guardrails are widely applied to auto industry, household appliances, construction industry, and highway guardrail construction, etc. It specializes in manufacturing and selling hot dipped galvanized steel sheet/coil (annual 160,000 tons), corrugated steel sheet (annual 80,000 tons), FRP plastic roofing sheet (annual 1,800,000 meters) and highway guardrail (annual 200,000 tons).

Main market: Africa, South America, South-east Asia, Middle east etc.

Africa: Ethiopia, Tanzania, Congo, Benin, Angola, Cambodia, South Africa etc

South America: Chile, Peru, Bolivia, Paraguay, Brazil etc

South east Asia: Indonesia, Phillipines, Malaysia, Vietnam, Thailand, Myanmar, etc


Middle East: UAE, Oman etc

With the strategic thought of striving for survival on the basis of quality and development on the basis of benefit, adhering to management idea of "faith, practical, innovation, and development", we have courage to challenge, and keep continuous innovation in the competition. We also do our unremitting efforts to fight bravely for creating a national brand and international brand. Holding to the intellectual businessman of style and the spirit of sincerity, all staff of our company are willing to cooperate and develop together with you.



镀铝锌钢卷


Hot dipped galvalume steel coils

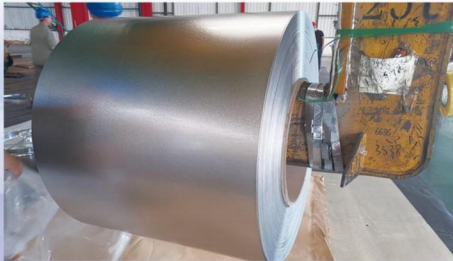

The surface of the galvalume steel sheet presents a unique smooth, flat and gorgeous star flower, and the base color is silver white. The special coating structure makes it have excellent corrosion resistance. The normal service life of the aluminum-zinc plate can reach 25a, and it has good heat resistance and can be used in a high temperature environment of 315° C; the adhesion of the coating and the paint film is good, and it has good processing properties, and can be stamped, cut, welded, etc.; The surface conductivity is very good.

The coating composition is composed of 55% aluminum, 43.4% zinc and 1.6% silicon in weight ratio. The production process of galvanized steel sheet is similar to that of galvanized steel sheet and aluminized sheet, which is a continuous molten coating process. The 55% aluminum-zinc alloy-coated galvanized steel sheet has better corrosion resistance than the galvanized steel sheet of the same thickness when exposed to the same environment on both sides. The 55% aluminum-zinc alloy coated aluminum-zinc steel plate not only has good corrosion resistance, but also the color-coated products have excellent adhesion and flexibility.

According to the data, the comprehensive anti-corrosion ability of 55% aluminum-zinc plating is 4 times that of galvanizing with the same thickness.

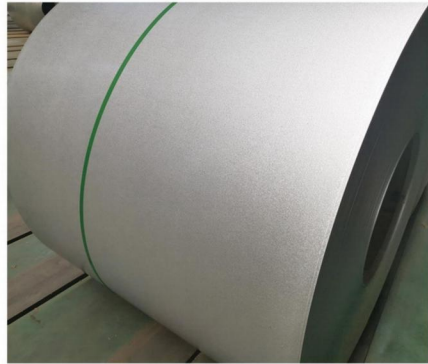

性能参数

原材料 Material	镀层 Aluzinc coating	厚度 Thickness	宽度 Width
冷轧卷或者轧硬卷 cold steel coils	30-150 g/m2	0.12mm-1.0mm	750mm-1250mm

各种尺寸及包装可以定制 The size can be customized.

性能参数

原材料 Material	镀层 Aluzinc coating	厚度 Thickness	宽度 Width
冷轧卷或者轧硬卷 cold steel coils	30-275 g/m2	0.11mm-2.0mm	750mm-1250mm

各种尺寸及包装可以定制 The size can be customized.



镀锌钢卷
Hot dipped galvanized steel coils

彩涂卷

Prepainted steel coils

Polyester (PE)

Good adhesion, rich colors, wide range in formability and outdoor durability, moderate chemical resistance, and low cost.

Silicon modified polyester

That is (SMP), the hardness of the coating film, abrasion resistance and heat resistance are good, as well as good external durability and chalking resistance, gloss retention, flexibility, and medium cost.

High durability polyester


Namely (HDP), excellent color retention and UV resistance, excellent outdoor durability and chalking resistance, good paint film adhesion, rich colors, and excellent cost performance.

Polyvinylidene fluoride

Namely (PVDF), excellent color retention and UV resistance, excellent outdoor durability and chalking resistance, excellent solvent resistance, good moldability, dirt resistance, limited color and high cost.

Application:

Color-coated steel rolls have light weight, beautiful appearance and good corrosion resistance, and can be directly processed. The colors are generally divided into gray, sea blue and brick red. They are mainly used in advertising, construction, home appliances, electrical appliances, furniture, and transportation. industry.

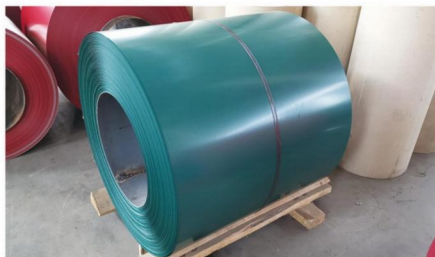

为客户创造价值



Creating value for customers

性能参数

原材料 Material	颜色 Color	厚度 Thickness	宽度 Width
镀铝锌卷, 镀锌卷, 冷轧卷 galvanized steel coils, galvalume steel coils	根据RAL色卡号或者样品 According RAL Number or samples	0.13mm-1.0mm	750mm-1250mm
各种尺寸及包装可以定制 The size can be customized.			

镀铝锌瓦楞板

Galvalume corrugated steel sheets

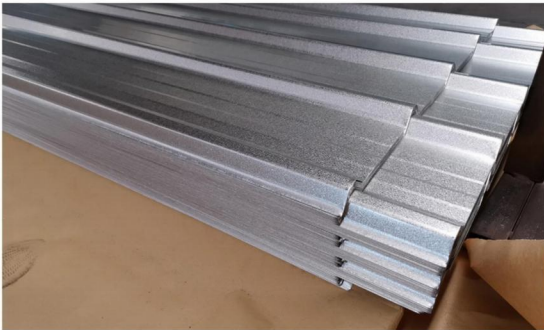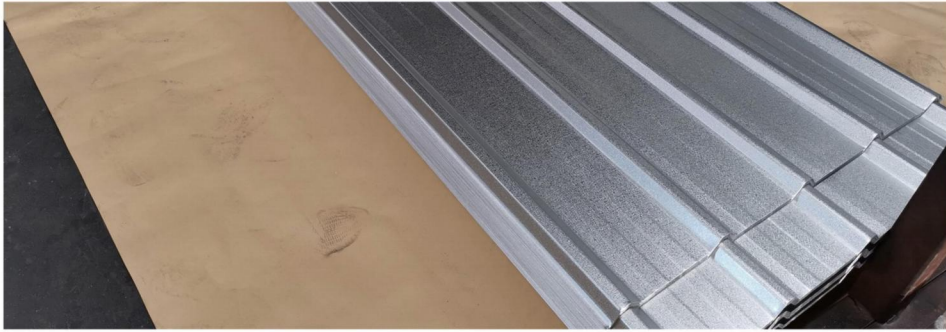

性能参数

形状 Shape	厚度 Thickness	材质 Material	宽度 Width
波浪形或梯形 waves shape or trapezoid shape	0.12mm-0.8mm	镀铝锌钢卷 galvalume steel coils	665mm/686mm/800mm/ 840mm/900mm etc


镀锌瓦楞板



Galvanized corrugated steel sheets

为客户创造价值
Creating value for customers

性能参数

形状 Shape	厚度 Thickness	材质 Material	宽度 Width
波浪形或梯形 waves shape or trapezoid shape	0.12mm-1.2mm	镀锌钢卷 galvanized steel coils	665mm/686mm/800mm/ 840mm/900mm etc

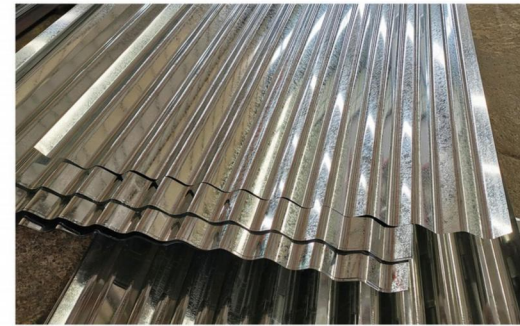


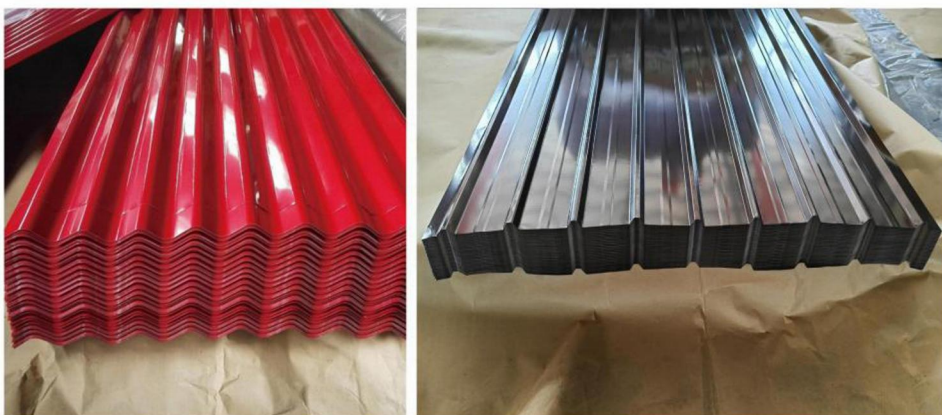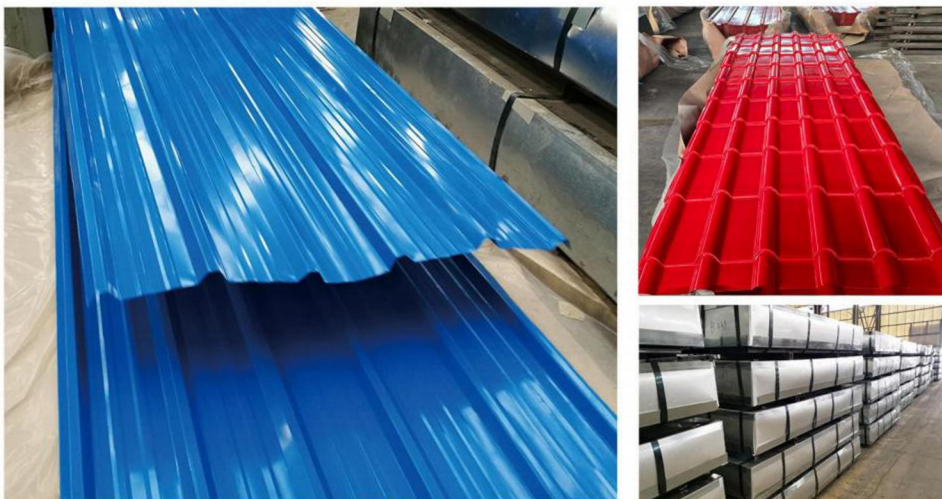

性能参数

形状 Shape	厚度 Thickness	材质 Material	宽度 Width
波浪形或梯形 waves shape or trapezoid shape	0.13mm-0.7mm	彩涂钢卷 ppgi steel coils	665mm / 800mm / 820mm / 840mm / 900mm / 1050mm


YX25-210-840(1050)

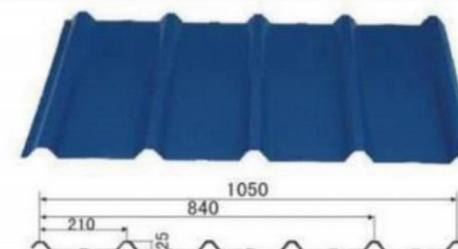

相关参数:

压型钢板型号	YX25-210-840(1050)	
有效覆盖宽度 (mm)	840/1050	
展开宽度 (mm)	1000/1200	
板厚 (mm)	0.5	0.6
截面惯性矩 (cm ⁴ /m)	4.44	5.38
截面抵抗矩 (cm ³ /m)	6.98	8.31

YX18-76.2-836/1064(弧形)

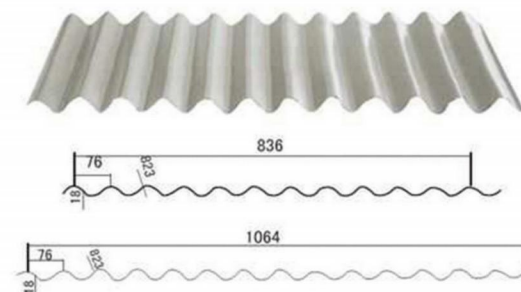

Materials:Galvanized steel coils,galvalume steel coils,PPGI steel coils etc

Shape	YX18-76.2-836(弧形) waves shape		Use
Effective width(mm)	836	1064	
Width before corrugated	1000	1200	
Thickness	0.30-0.70mm		
Section inertia moment(cm ⁴ /m)	2.45	2.94	Roof or wall sheet
Section resistance moment(cm ³ /m)	2.57	3.07	


FRP 采光瓦 (阳光板)

FRP plastic roofing sheet

✦ 性能优点:



- (1) 透光率: 佰妙玻璃钢采光板的透光率为60-85%。
- (2) 耐冲击性: 普通玻璃的250至300倍, 丙烯酸板的30倍, 钢化玻璃的2至20倍, 被称为“不间断玻璃”和“有声钢”。
- (3) 防紫外线: 在一侧涂有一层涂料, 以防止紫外线和在一侧进行防冷凝处理。
- (4) 重量轻: 比重仅为玻璃的一半。
- (5) 节能: 用于带暖气设备的建筑物时, 可确保房间冬季保暖, 夏季保冷, 保温效果为7%-25%。
- (6) 温度适应性: 在135℃不会软化, 变化不大。
- (7) 耐候性: 在-40℃至120℃下可稳定4000小时, 泛黄度为2, 透光率仅降低0.6%。
- (8) 防凝露: 室外0℃, 室内23℃, 湿度80%以下, 内表面无凝露。

- (1) Light transmittance: The light transmittance of Baimiao FRP lighting board is 60-85%.
- (2) impact resistance: 250 to 300 times of ordinary glass, 30 times of acrylic plate, 2 to 20 times of toughened glass, known as "unbroken glass" and "sound steel".
- (3) UV protection: one side is coated with one side to protect it from ultraviolet rays and anti-condensation treatment on one side.
- (4) Light weight: the specific gravity is only half of the glass.
- (5) Energy-saving: when it is used for buildings with heating equipment, it ensures the room warm in winter and cool in summer, and the heat insulation effect is 7%-25% .
- (6) Temperature adaptability: it will not soften at 135℃, and there is no significant change.
- (7) Weather resistance: It is stable from -40℃ to 120℃ for 4,000 hours, the yellowing degree is 2, and the light transmittance decreased by only 0.6%.
- (8) Anti-condensation: Outdoor 0℃, indoor 23℃, humidity below 80%, no condensation on the inner surface.

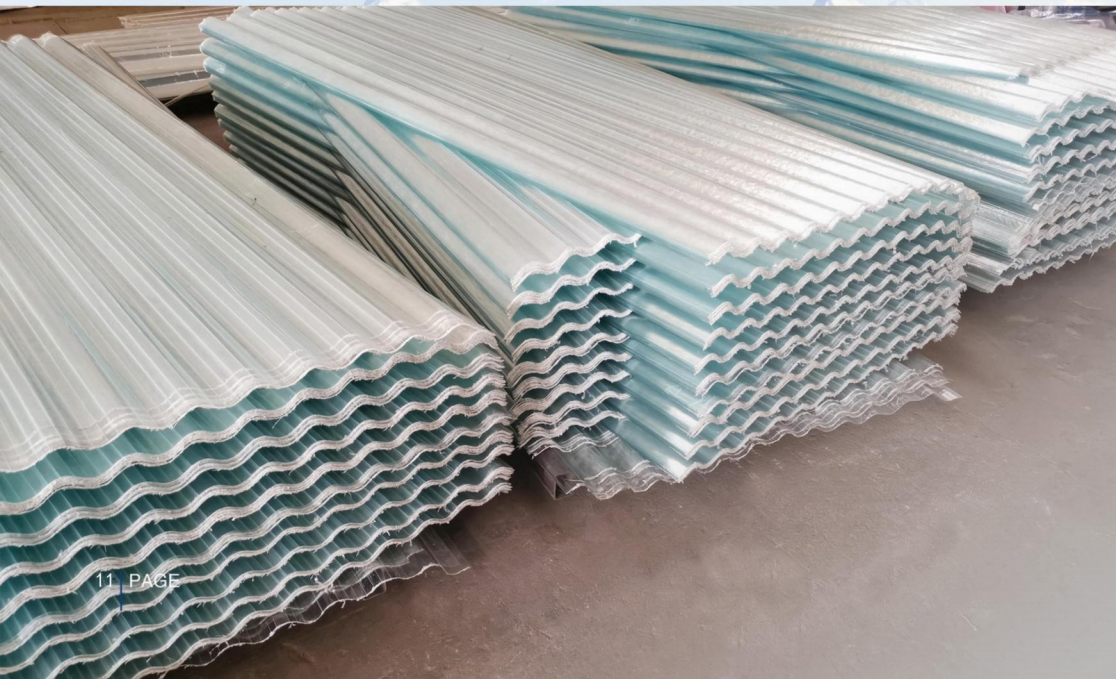

为客户创造价值

Creating value for customers

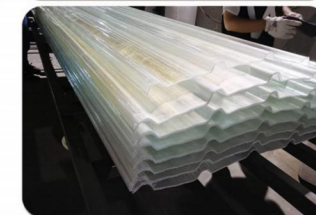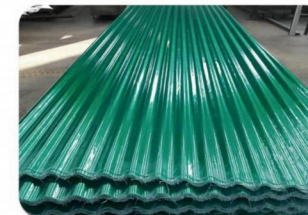

性能参数

原材料 Material	厚度 Thickness	宽度 Width	长度 Length
玻璃纤维, 树脂 Fiberglass reinforced resin	0.40mm-3.0mm	610/665/800/825/840/900/ 1025/1050mm 等等	1000-11800mm

各种尺寸及包装可以定制 The size can be customized.

STONE COATED METAL ROOFING TILE

Bond

Tile Size	1340-1720mm*420mm
Exposure Size	1290-1670mm*370mm
Weight	2.0kg-3.5kg
Color	Customized
Thickness	0.2mm-0.6mm



CLASSIC

Tile Size	1340mm*420mm
Exposure Size	1290mm*370mm
Weight	2.0kg-3.5kg
Color	Customized
Thickness	0.2mm-0.6mm



Shingles

Tile Size	1340mm*420mm
Exposure Size	1290mm*370mm
Weight	2.0kg-3.5kg
Color	Customized
Thickness	0.2mm-0.6mm




Milano

Tile Size	1340mm*420mm
Exposure Size	1290mm*370mm
Weight	2.0kg-3.5kg
Color	Customized
Thickness	0.2mm-0.6mm



Roman

Tile Size	1340mm*420mm
Exposure Size	1250mm*370mm
Weight	2.0kg-3.5kg
Color	Customized
Thickness	0.2mm-0.6mm

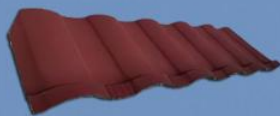

GROOVE

Tile Size	1300mm*420mm
Exposure Size	1250mm*370mm
Weight	2.0kg-3.5kg
Color	Customized
Thickness	0.2mm-0.6mm



MAKUTI GRAINED

Tile Size	1340mm*420mm
Exposure Size	1290mm*370mm
Weight	2.0kg-3.5kg
Color	Customized
Thickness	0.2mm-0.6mm




Slate

Tile Size	1340mm*420mm
Exposure Size	1290mm*370mm
Weight	2.0kg-3.5kg
Color	Customized
Thickness	0.2mm-0.6mm



APPLICATION

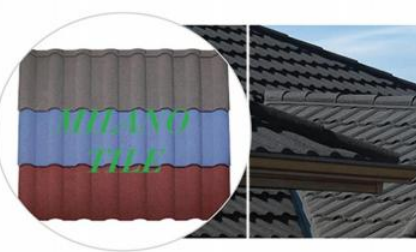

钉子
Nails and roofing nails



铁丝 Galvanized steel wire/
black steel wire

为客户创造价值
Creating value for customers

