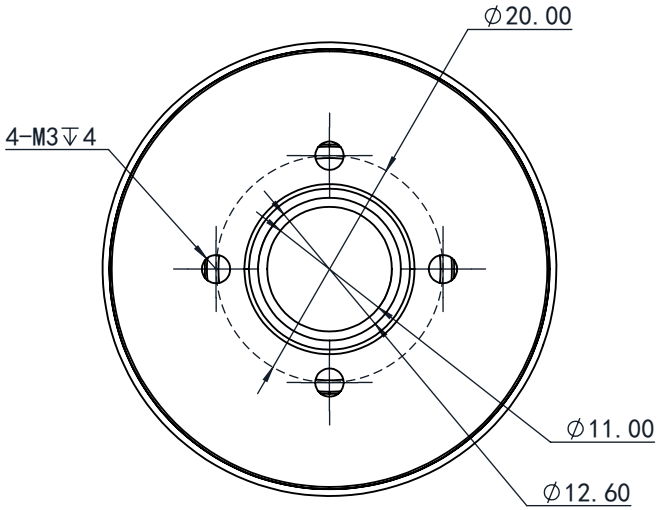

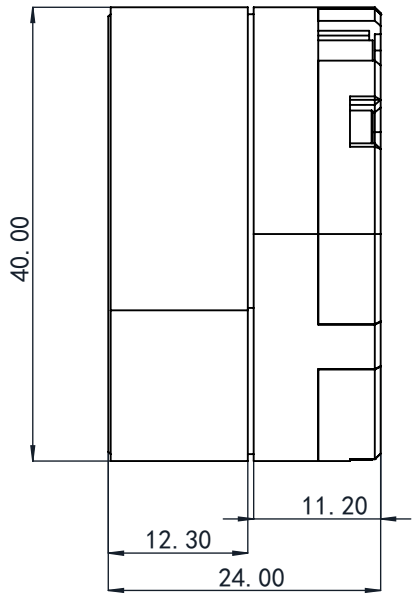

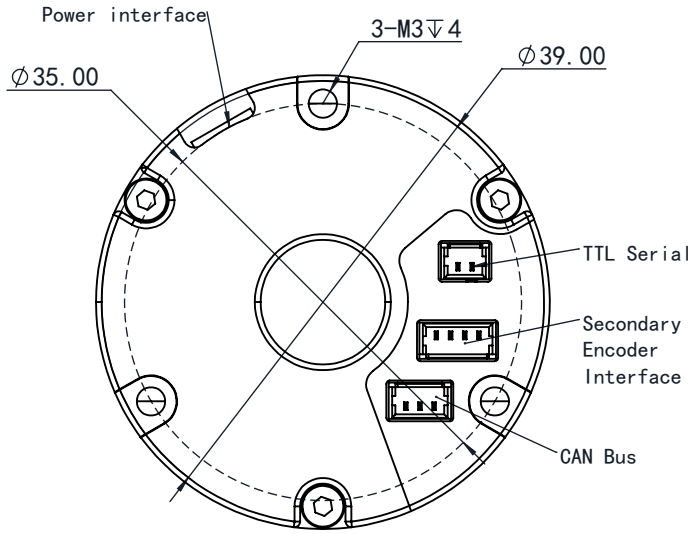

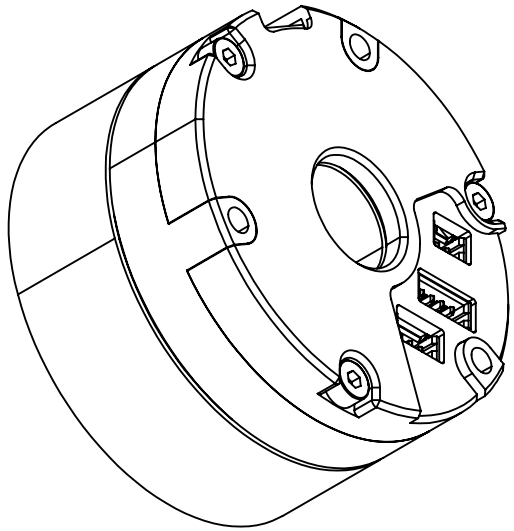

Motor Data Sheet		
Parameter	Unit	Value
Voltage range	V	12~24
Peak torque	N.M	0.22
Rated torque	N.M	0.08
Peak current	A	2.5
Continuous current	A	< 0.7
Instantaneous power	W	60
Rated power	W	16.8
Outer diameter	mm	40

Mark	Zone	Revisions	Revised Document No.	Signature	Date

Tolerances per ISO 2768-1:1989 ISO 22081:2021

Design		Part Name	Project No
Checked by		Material	Drawing No
Reviewed by		Surface Treatment	Solismotor
Rev A0	Scale 1: 1	View	