

Panel Mount Thermometer and Hygrometer

SH105YB


Thanks for purchasing our Panel Thermometer and Hygrometer. It is suitable for monitoring the realtime temperature and humidity on dry cabinet, wine cabinet, and other devices.

Feature and specification

- ※ Temperature measuring range: -50°C~70°C (-58°F~158°F), ±1°C
- ※ Humidity measuring range: 10%-95%, ±5%RH
- ※ Celsius and Fahrenheit conversion
- ※ Power Supply: 1 x CR2032 3V cell battery
- ※ Panel Size : 4.17x1.42 inch (106x36mm)
- ※ Mount Hole Size: 3.66x1.30 inch (93x33 mm)

Operation

- First time to use
Open the battery cover and get out the insulation tape. The temperature and humidity value will be displayed on the screen.
- Replace the battery
The life cycle of the battery about 1 year. When the battery power is low, please open the rear and reload a new CR2032 battery according to the correct polarity.

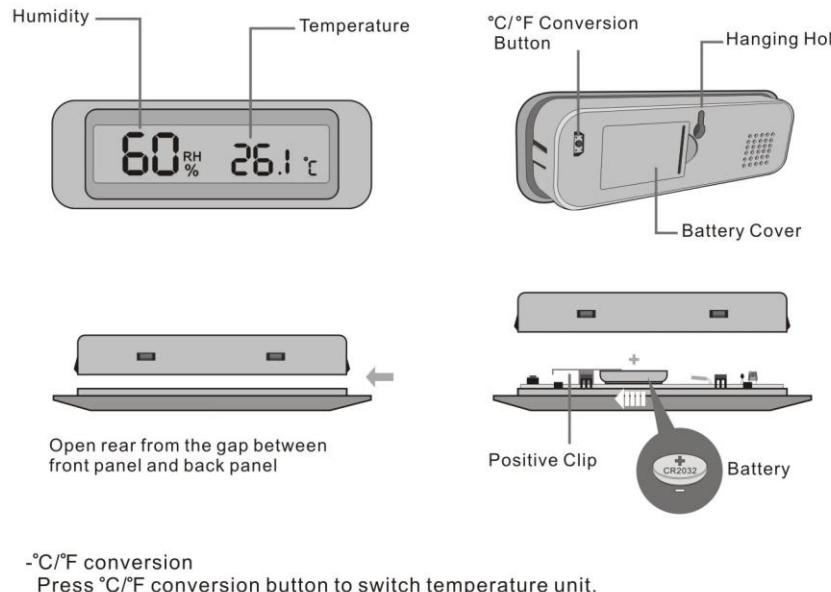

面板温湿度计用户手册

SH105YB

感谢您购买菲明格面板温湿度计。

该款产品外形新颖、超薄、安装方便，适用于对环境、雪茄盒、红酒柜、防潮箱以及机电设备的温湿度监控。

功能特性

- ※ 温度测量范围: -50°C~70°C (-58°F~158°F), ±1°C
- ※ 湿度测量范围: 10%-95%, ±5%RH
- ※ 温度单位转换
- ※ 内置1颗CR2032纽扣电池
- ※ 面板尺寸: 106x36 mm
- ※ 安装尺寸: 93x33 mm

操作说明

- 初次使用
打开电池盖(图2)，拔出绝缘条，显示屏立刻显示测量温度和湿度。
- 更换电池
内置纽扣电池使用寿命约1年，当电池需要更换时，请沿前后盖的间隙(图3)取下后盖，更换CR2032纽扣电池(图4)。注意电池的正极向上，负极向下

