Jumon International Co.,Ltd

Enjoy Music, Enjoy Life

Product Specification---Bluetooth Speaker

Vision 3.0 Model: BTS-JM33

Welcome visit product vide https://youtu.be/ HVPXe4jmmI

Party time Disco Party bluetooth speaker with LED light show

AUX in Fully compatible

3.5mm standard audio connection, and on the market can meet the vast majority of smartphones, tablets, desktops, MP3 audio output needs.



Contents

| Selling Point |
|--|
| In the Box |
| Specification |
| Product Picture |
| Different Color |
| Function |
| Support Multi Format Music Playing |
| Power |
| Product Applications Scenarios |
| Bluetooth Speaker Controls |
| Charging Bluetooth Speaker |
| Turning on the speaker |
| Talking a call - Speakerphone mode |
| Connecting your speaker to smartphones and other devices |
| Disconnecting from another Bluetooth device |
| Reconnecting |
| Clearing all pairings |
| Environmental |
| Warning & Certification |

Selling Point

- DISCO PARTY bluetooth speaker with led light show with different colors to change by music
- · Speaker output: 5 watts
- · BIG wireless sound
- Perfectly suitable for family party, KTV, Disco, bar, wedding, sports square, park, beach and other places

Streams music wirelessly from any Bluetooth device

- Speakerphone functionality
- Support USB/TF Card Slot, AUX

In the box

- . BTS-JM33 BLUETOOTH party speaker with disco light show
- . USB charging cable
- . 3.5mm audio cable
- . English Manual



Package:



Specifications

| Material | ABS +acrylic+piano finish |
|-------------------|--------------------------------------|
| Rating power | 5W |
| Bluetooth Version | 4.0 |
| Speaker | 52mm 4Ω |
| Battery: | 1pc 1200mAh |
| Control mode: | Key buttons, ON/OFF |
| Product size | 155 height*101mm diamater |
| Weight | 276g |
| Voltage: | 5V+/-0.5V via Mini USB Port |
| Working mode | AUX/USB disk/Micro SD card/Bluetooth |

Product Picture



Product Specification

Bluetooth speaker model BTS-JM33


Page 3

Different Color Lighting



Product Function



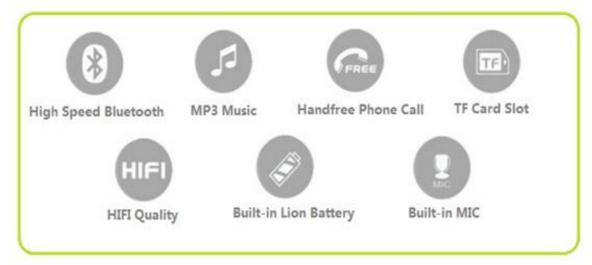

Support Multi Format music playing



Power

- Up to 6 hours continuous play
- Built in lithiumion rechargeable battery
- Charged via USB

Product Applications Scenarios



Product specification

Bluetooth speaker model BTS-JM33

Page 5

Bluetooth Speaker controls



Charging Bluetooth Speaker

Checking the battery level

- Click the (Power) button momentarily, The LED indicator blinks blue constant on
- If low battery level, the speaker responds with "beep" sound
- If the battery charge gets very low, after several times of beep sound, the speaker will turn off to protect the battery.
- While the speaker's battery is being charged, the LED will be constand on red .
- When the speaker's battery has reached full charge, the red led will light off.

Charging your speaker

- Connect the Micro-USB charging cable to the speaker and to the supplied USB port
- USB cable connect with Computer or power device with USB port
- The LED red constant on during charging.
- The LED light off once the battery is fully charged

Turning on the speaker

- •Move the (Power) button to turn the speaker on.
- Move the (Power) button to turn the speaker off.

Talking a call - Speakerphone mode

- Bluetooth speaker can act as a very high quality speakerphone for your cell phone smartphone, You can receive and end calls and manage a call hold.
- If you take a call on your phone when it is connected to the speaker, You'll hear it ringing through the speaker.
- Speak voice response commands through the speaker's microphone.
- Clik or or raise or lower the volume.
- Click button to cancel voice response mode.

Intelligent bluetooth hands-free calls

A key answer the phone

High Sound Quality








Connecting your speaker to smartphones and other devices

- Connect to Bluetooth Speaker either through its audio input jack or through a Bluetooth wireless link. Only one of these inputs can be active at a time.
- Connect one end of a 3.5 mm audio cable to your
 Fugoo Bluetooth Speaker's audio input jack, then connect the other end to the headphones jack of your audio device.
- The LED glows blue blinking when "Disconnected. Bluetooth off."
- Plugging an audio cable into the speaker's audio input jack turns off the Bluetooth wireless link, to save power and maximize battery life.

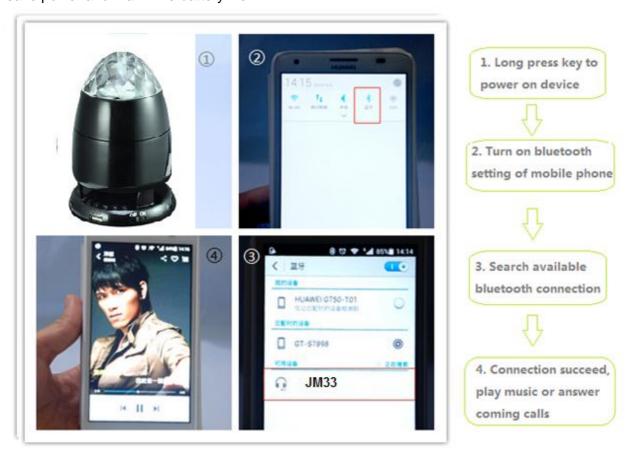

Disconnecting from another Bluetooth device

You disconnect your Bluetooth Speaker from another Bluetooth device, you can:

- Click the (Bluetooth) button on your speaker.
- Move your speaker and the other Bluetooth device more than 33 feet (10 meters) apart.
- Turn off your speaker
- Turn off the other device.
- Turn off Bluetooth on your other device.
- Plug an audio cable into the speakers audio input jack.
- Disconnecting temporarily interrupts the Bluetooth wireless link between the speaker and the other devices, which permits the speaker to re
- -connect with another device it has been paired with. The disconnected device will still be paired with the speaker, allowing them to automatically reconnect when they are both on and within 30 feet of each other.

Reconnecting

- To reconnect to a Bluetooth device that you have paired with, just turn on the speaker and the other device, and place them within 33 feet (10 meters) of each other. It's also necessary that no cable be plugged into the audio input jack. Typically, speaker and the other device will reconnect automatically.
- If voice prompts are enabled, the speaker says "Connected".

Clearing all pairings

• To clear all of the Bluetooth pairings with other devices, turn the speaker on, and then hold the (Bluetooth) button for ten seconds, until the speaker says "All Bluetooth pairings cleared. Pairing mode. Please use the Bluetooth settings of your device to connect."

Environment

- Operating Temp: 14°-131° F (±110°±55° C)
- Storage Temp: 40° +1158° F (+40° +170° C)
- Disco lighting space suitable for 40meters

Warning & Certification

