

2023

eRetail3.1 Docking Scheme Documentation

V1.2

DALIAN SERTAG TECHNOLOGY CO., LTD

Historic Version

Version Number	Date	Describe	Framer	Reviewer
1.0	2022/3/31	First edition		
1.1	2023/10/25	Active docking, UI interface modification	Merlin	Tony
1.2	2023/11/15	eRetail3.1 Docking Scheme Documentation translate	Kris	Tony

Contents

1. Summary	3
2. Product Data Docking Method	3
3. Active Docking.....	3
3.1 Store Configuration	4
3.2 Data Sync Configuration.....	5
3.3 Dynamic Model Configuration	10
3.4 Model Parameter Configuration	11
3.5 Template Configuration.....	12
4. Passive Docking.....	13
4.1 Calling Method	14
4.2 System Integration Interface.....	17
5. No Docking	19
5.1 Product Data Maintenance	21


1. Summary

eRetail3.1 supports docking methods: Data Sync/API, hardware equipment, API is Restful Web API, which provides an interface for customer systems to actively push product data; Data Sync is a background service that actively captures data from customer systems (Database, Web API, Excel).


2. Product Data Docking Method

Data docking: active docking, passive docking, and no docking.

- Active docking: eRetail3.1 actively requests data, requiring the client to provide data access rights, connection information, data structure, product sales logic, and active docking: database docking, files, FTP files, customization (API interface).

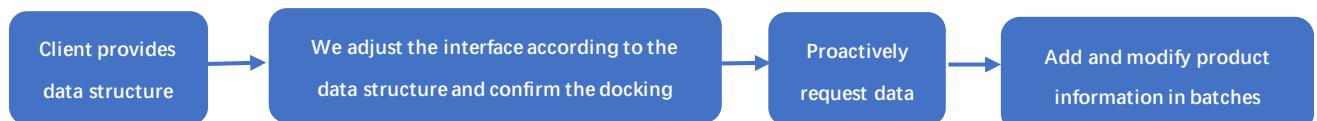

- Passive docking: To receive data sent by customers, we provide corresponding API interface documents and data structures.



- No docking: Product data is maintained in eRetail3.1, and product data is added and modified through background tables.

3. Active Docking

Parameter configuration: Log in eRetail3.1 - System Management - Admin Tools - Fill in the docking parameters in the System Configuration.

The screenshot shows the Admin Tools section of the eRetail3.1 system. On the left, a sidebar menu is open under 'System Management' with 'Admin Tools' selected. The main area has several cards:

- System Configuration:** A card with a gear icon labeled 'Enter configuration system'.
- TFT screen refresh:** A card with fields for 'Store', 'Select area', and 'Template name', and a 'Submit' button.
- ESL refresh:** A card with fields for 'Store', 'Template name', and a 'Submit' button.
- OTA Upgrade:** A card with fields for 'Store number is required', 'Select area', 'Version', 'Tag MAC address', and an 'Add' button. It also includes an 'Upload OTA file' input and a 'Submit' button.
- Data Backup:** A card titled 'Data Backup' with an instance name 'ETAG'. It lists 'Backup Tables' (D2M, SysUser, GoodsBind, Settings) and 'Configure' (Shop, ResBind, Tag, Area). There's a checkbox for 'Enable automatic backup' and buttons for 'Save' and 'Backup'.

3.1 Store Configuration

- **Store Number:** The global configuration is the configuration information of all eRetail3.1 stores; the single store configuration is the configuration information of the specified store.
- **Data Sync:** Active docking must be turned on.
- **Sync Interval:** Synchronization period, unit second.
- **Template type:** ESL template name, needed when making templates.

[Shop Configuration](#) > [Data Sync Configuration](#) > [Dynamic Model Configuration](#) > [Model Parameter Configuration](#) > [Template Configuration](#)

Shop Configuration

Store Number	(Global)
Data Sync	<input type="radio"/> Open <input checked="" type="radio"/> Closure
* Sync Interval	50
* Template Type	SAL,REG
<input type="button" value="Next"/> <input type="button" value="Restore from Backup System"/>	

3.2 Data Sync Configuration

Shop Configuration > Data Sync Configuration > Dynamic Model Configuration > Model Parameter Configuration > Template Configuration

Data Sync Configuration (Global)

Data Source Database File FTP File Customize

Database Type MySQL

Connection String `data source=XXX;database=XXX;user id=XX;password=XX;pooling=false;charset=utf8;Connect Time` Help me fill in the template!

Query String

Query Type SQL Query Stored Procedure

Parameters `shop=000=false`

Database: The customer uses a database containing product data; provides database connection parameters and product data structure information.

- Database type: SQL Server, My SQL, Sybase, Oracle, and Sqlite.
- Connection string: Click to help me fill in the template and change parameters.

Database	SQL Server
Params	Meaning
server	DB IP address
uid	DB username
pwd	DB password
database	DB instance

Database	Sybase
Params	Meaning
Data Source	DB IP address
Initial Catalog	DB instance
Userid	DB username
Password	DB password

Database	Sqlite
Params	Meaning
Data Source	DB file path + DB file name

Database	My SQL
Params	Meaning
data source	DB IP address
database	DB instance
userid	DB username
password	DB password
pooling	Connection limitations
charset	Encoding type
Connect Timeout	Maximum expiration time

Database	Oracle
Params	Meaning
HOST	DB IP address
PORT	DB port
SERVICE_NAME	DB instance
UserId	DB username
Password	DB password
Min Pool Size	Connection limitations
Connection Timeout	Maximum expiration time

- Try: Test the database connection information filled in. Click the upper right corner of Try to prompt success.
 - Query String: Fill in the corresponding String according to the selected Query Type.
 - Parameters: When Query Type selects a Stored Procedure, fill in the stored procedure parameters.
- (1) SQL Server 2000 requires tools to synchronize data from the 2000 version to the 2012 version in real time (the tools are provided by us), and then use the 2012 version data to connect.

Shop Configuration > [Data Sync Configuration](#) > Dynamic Model Configuration > Model Parameter Configuration > Template Configuration

Data Sync Configuration (Global)

Data Source Database File FTP File Customize

Database Type

Connection String
Help me fill in the template!

Query String

Query Type SQL Query Stored Procedure

Parameters

Configure based on stored procedure data in the customer database.

File: The product data file in the specified file path, and eRetail3.1 reads the files in the path in real time.

Shop Configuration > Data Sync Configuration > Dynamic Model Configuration > Model Parameter Configuration > Template Configuration

Data Sync Configuration (Global)

Data Source Database File FTP File Customize

File Path D:\3.0\abutment

File Type xlsx

First Row as Header Yes No

File Encoding UTF-8

Delete Source File Yes No

Backup Directory D:\3.0\backups

Next

File: The product data file in the specified file path, and eRetail3.1 reads the files in the path in real time.

- File Path: Sync file path.
- File Type: Supports xlsx, xls, csv, txt file formats.
- First Row as Header: The first line is the field name, select Yes; or the product data, select No.
- File Encoding: The default format is UTF-8.
- Delete Source Files.
- Backup Directory: The synchronized files will be deleted, and the deleted files will be stored in this path.
- File fields cannot contain a field named template.

FTP files:

Data Sync Configuration (Global)

Data Source Database File FTP File Customize

FTP Address

FTP User

FTP Password

FTP Remote Path

File Path

File Type ▼

First Row as Header Yes No

File Encoding


Delete Source File Yes No

Backup Directory


Next

- FTP Address: IP of FTP software server.
- FTP User: FTP software server login name.
- FTP password: FTP software server login password.
- FTP Path:FTP software server storage data file path.
- Other settings: same as file.
- Differences between files and FTP files:

File Synchronization

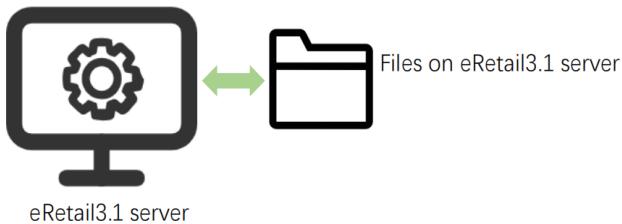

FTP File Synchronization

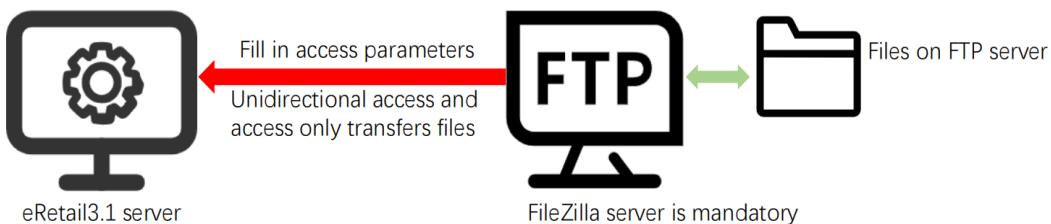

Customize: The customer provides the product data API interface, and we obtain the data through the interface. Fill in the connection parameters with the customized instance name and customized parameters.

Shop Configuration => [Data Sync Configuration](#) => Dynamic Model Configuration => Model Parameter Configuration => Template Configuration

Data Sync Configuration (Global)

Data Source Database File FTP File Customize

Customization Instance Name

Customization Parameters

[Next](#)

Customer provides information:

- Various request addresses related to ESL: Store Number, Product Data, Key, etc.
- Various request parameters related to ESL: Store Number, Product Data, Key, etc.
- Various response parameters related to ESL: Store Number, Product Data, Key, etc.
- ESL require fields and field meanings.
- Product sales method judgment logic.

- Product field data conversion logic.

3.3 Dynamic Model Configuration

Customized docking requires no settings.

Custom fields

eRetail fields		String, date, decimal, int			
<input type="text" value="id"/>	<input type="text" value="Display Name"/>	<input type="text" value="Int32"/>	<input type="button" value="Format"/>	<input type="checkbox"/> Read-only	<input type="button" value="More Settings"/>
<input type="text" value="store_id"/>	<input type="text" value="Store Code"/>	<input type="text" value="string"/>	<input type="button" value="Format"/>	<input type="checkbox"/> Read-only	<input type="button" value="More Settings"/>
<input type="text" value="item_id"/>	<input type="text" value="Goods Code"/>	<input type="text" value="string"/>	<input type="button" value="Format"/>	<input type="checkbox"/> Read-only	<input type="button" value="More Settings"/>
<input type="text" value="desc_en"/>	<input type="text" value="Description"/>	<input type="text" value="String"/>	<input type="button" value="Format"/>	<input type="checkbox"/> Read-only	<input type="button" value="More Settings"/>
<input type="text" value="desc_zh"/>	<input type="text" value="商品描述"/>	<input type="text" value="String"/>	<input type="button" value="Format"/>	<input type="checkbox"/> Read-only	<input type="button" value="More Settings"/>
<input type="text" value="price_sal"/>	<input type="text" value="Sal Price"/>	<input type="text" value="decimal"/>	<input type="text" value="#0.00"/>	<input type="checkbox"/> Read-only	<input type="button" value="More Settings"/>
<input type="text" value="price_reg"/>	<input type="text" value="Reg Price"/>	<input type="text" value="Decimal"/>	<input type="text" value="#0.00"/>	<input type="checkbox"/> Read-only	<input type="button" value="More Settings"/>
<input type="text" value="shelf_id"/>	<input type="text" value="Shelf Code"/>	<input type="text" value="String"/>	<input type="button" value="Format"/>	<input type="checkbox"/> Read-only	<input type="button" value="More Settings"/>
<input type="text" value="origin"/>	<input type="text" value="Origin"/>	<input type="text" value="String"/>	<input type="button" value="Format"/>	<input type="checkbox"/> Read-only	<input type="button" value="More Settings"/>

If the display name is empty, the field will not be synchronized

Is Hidden: Show Hide

Default Value:

Original Time Format: For example:yyyyMMdd

Original Encoding:

Converted Encoding:

1. Two decimals reserved for price: #0.00,(12-12.00)
2. Format price: (9,111.00). N,(98573.00-98,573.00)
3. Format date: dd/MM/yyyy HH:mm:ss

- Is Hidden: Green means display, red means hide. After hiding, the product query on the APP can't display this field and field information.
- Default Value: Filling in the format data will replace the original data.
- Original Time Format: For example, time 02122023 can be filled in MMddyyyy
- Original Encoding\Converted Encoding: Some product data encoding formats can't be recognized by the eRetail3.1, and direct acquisition will result in garbled codes. Fill in the customer's product data encoding format with the original code,

and fill in the encoding format supported by the eRetail3.1 with the converted code.

3.4 Model Parameter Configuration

- Store Number: Use Column, Use File Name or Use Folder Name.
- Store Number: You must be choose Use Column if you use to select Store Number.
- Goods Code: The value of this field must be unique under the same store.
- Goods Name: Select the connected product name field.
- UPC: The field used to unlock the product when ESL is bound to the product. Usually the default Goods code is UPC.
- Trim Characters:

Trim Characters	Select the field to trim	Start Character	End Character	Remove fixed characters at the beginning or end of the selected field
Beginning Char0	Beginning Char 12			Beginning Char 12, End Char 4
Custom data Goods UPC: 00789123 Goods UPC: 00789443	Custom data Goods UPC: 123478954 Goods UPC: 123478664			Custom data Goods UPC: 123478954 Goods UPC: 123478664
Converted data Goods UPC: 789123 Goods UPC: 789443	Converted data Goods UPC: 3478954 Goods UPC: 3478664			Converted data Goods UPC: 347895 Goods UPC: 347866

Note: Goods Code is not supported for trim!

➤ Format Expressions: Transform customer data.

Format Expression

4#0.5=10:E:KG|10:E:kg|10:E:Kg|10:E:kG|10:E:公斤
 5#0.5=10:E:KG|10:E:kg|10:E:Kg|10:E:kG|10:E:公斤
 10~500g=10:E:KG|10:E:kg|10:E:Kg|10:E:kG|10:E:公斤

Don't know? Please refer to developer

Format: field-operator-parameter=condition expression
 Price multiply #:9#0.5=7:E:kg
 Integer multiply:8@2=7:E:kg
 Equal to ~:7~500g=7:E:kg|7:E:KG

UPC	<input type="checkbox"/> 0.Store Code	<input checked="" type="checkbox"/> 1.Goods Code	<input type="checkbox"/> 2.Description	<input type="checkbox"/> 3.商品描述
	<input type="checkbox"/> 4.Sal Price	<input type="checkbox"/> 5.Reg Price	<input type="checkbox"/> 6.Shelf Code	<input type="checkbox"/> 7.Origin
	<input type="checkbox"/> 8.Start Date	<input type="checkbox"/> 9.End Date	<input type="checkbox"/> 10.Unit	

1. $4\#0.5=10:E:KG|10:E:kg|10:E:Kg|10:E:kG|10:E:公斤$
 Sal price will be divided by two when Unit meets KG/kg/Kg/kG/公斤

2. $5\#0.5=10:E:KG|10:E:kg|10:E:Kg|10:E:kG|10:E:公斤$
 Reg price will be divided by two when Unit meets KG/kg/Kg/kG/公斤

3. $10~500g=10:E:KG|10:E:kg|10:E:Kg|10:E:kG|10:E:公斤$
 Unit will be fixed as "500g" when Unit meets KG/kg/Kg/kG/公斤

4. Some rounded fields use @ instead of #, to make sure the calculated result keep in Integer.

For example:

When the inventory number is greater than 500, multiply the number of storage by #Inventory Value@2, and the calculation result of @ is an integer.

3.5 Template Configuration

Template Configuration
(Global)

Column Index	0.Store Code	1.Goods Code	2.Description	3.商品描述
	4.Sal Price	5.Reg Price	6.Shelf Code	7.Origin
Default Value	REG			
SAL:Template Expression	4:G:0			
REG:Template Expression	4:E:0			
OOS:Template Expression				
MER:Template Expression				
TEST:Template Expression				


Expression explanation: Template ID=condition expression
 1. Condition operators: &-and, |or;
 2. Logical operators: E-equal to, NE-not equal to, I-contains, NI-does not contain, G-greater than, GE-greater than or equal to, L-less than, LE-less than or equal to;
 3. Parentheses are used for logical nesting: ()
 4. Expression delimiter is a colon ":"
 5. Special agreement: Current time 'GDT{1}', the number within the curly braces represents the number of days to add or subtract. When the value is eRetail.1, it indicates comparison with the specified field in the current data. Greater than, less than, greater than or equal to, less than or equal to can only be used for numeric and date comparisons.
 6. Example: SAL=1:G:&2:LE:GDT&3:GE:GDT{-1}, indicates that the template is SAL when field 1 is greater than 0, field 2 is less than or equal to the current time, and field 3 is greater than or equal to the current time minus one day.

- Expression explanation: Template ID=condition expression.
- Default value: Usually empty and default REG type.

- Condition operators: &-and, | -or;
- Logical operators: E-equal to, NE-not equal to, I-contains, NI-does not contain, G-greater than, GE-greater than or equal to, L-less than, LE-less than or equal to;
- Parentheses are used for logical nesting: ()
- Expression delimiter is a colon ':'
- Special agreement: Current time 'GDT{1}', the number within the curly braces represents the number of days to add or subtract. When the value is eRetail.1, it indicates comparison with the specified field in the current data. Greater than, less than, greater than or equal to, less than or equal to can only be used for numeric and date comparisons.
- Example: SAL=1:G:0&2:LE:GDT&3:GE:GDT{-1}, indicates that the template is SAL when field 1 is greater than 0, field 2 is less than or equal to the current time, and field 3 is greater than or equal to the current time minus one day.
- Note: The above list can be used as a reference.

4. Passive Docking

Data Sync option is turned off.

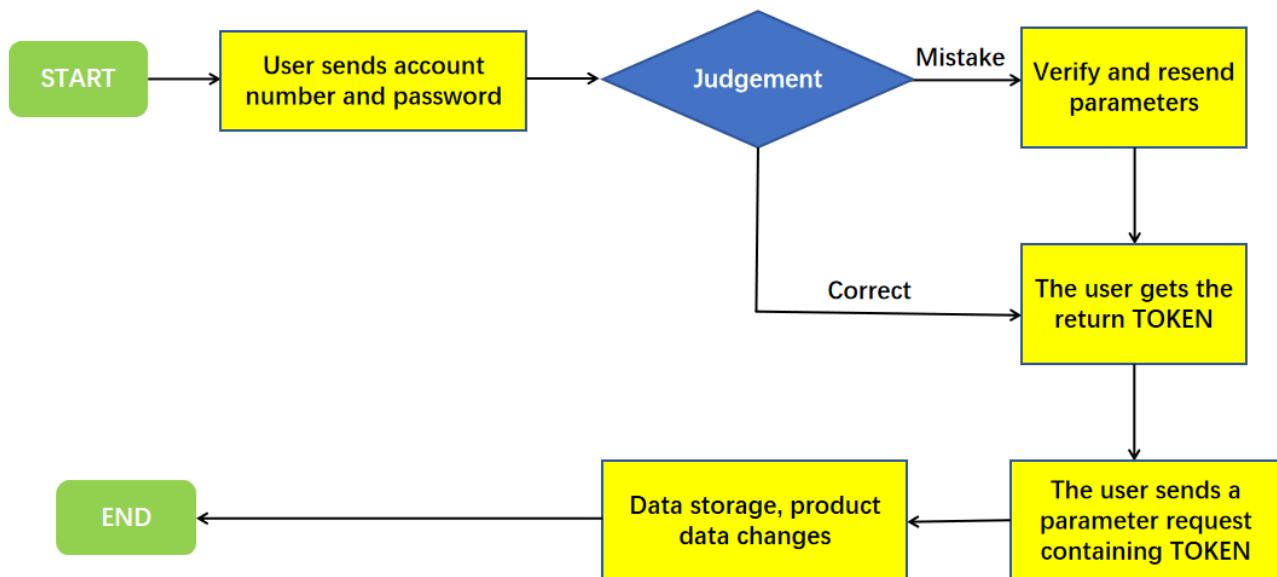

4.1 Calling Method

Handshake interface: This interface is used for authentication. All subsequent interface accesses depend on the data obtained by this interface.

◆ HTTP POST

URL: http:// 192.168.1.92:5000/api/login

Content-Type: application/json

◆ Request Parameters:

Parameter Name	Type	Describe
userName	String	Username (provided by us)
password	String	Password (provided by us)

◆ Return Format:

Parameter Name	Type	Describe
code	Int	0: success, other: error
message	String	success or error message
body	Json Node	message body
token	String	Token for subsequent sessions

Notice: After obtaining the Token, this content needs to be added to the header of subsequent HTTP requests. Like:"Authorization: Bearer {token}"

◆ Example:

Request

```
{  
  "userName":"port",  
  "password":"Port99"  
}
```

Response

```
{  
  "code": 0,  
  "message":"success",  
  "body": {}  
  "token":"eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9..."
```

```

    }
}
```

Product data interface: This interface is used to add and update multiple product data.

◆ HTTP POST

URL: http:// 192.168.1.92:5000/api/goods/saveList

Content-Type: application/json

◆ Request parameters:

Parameter Name	Type	Describe
shopCode	String	Store number, create the corresponding store.
template	String	Template name, create the corresponding template.
items	Array String[26]	Product data attributes, fixed at 26 (expandable)

◆ Return format:

Parameter Name	Type	Describe
code	Int	0: success, other: error
message	String	success or error message
body	Json Node	message body

Note: After obtaining the Token, you need to add this content to the header of subsequent HTTP requests. like:"Authorization: Bearer {token}"

◆ Example:

Request

```

[
  {
    "shopCode": "0001", //Customer store number
    "template": "REG", // ESL type: REG-General Sales, SAL-Promotion, NOR-Out of Stock....
    "items": [
      "A050", //Store number
      "123456", //Product code
      "Product 1", //Product name
      "1", //Product abbreviation
      "123456789012" //UPC1
    ]
  }
]
```

```
"123456789013",// UPC2
"123456789014",// UPC3
"8.98",// REG price
"8.95",//SAL price
"8.96",//Member price
"8.96",//Original price
"Shanghai",//Origin
"300ml",//Specification
"qualified",//Grade
"bottle",//Unit
"2021/12/20",//Promotion start date
"2021/12/25",//Promotion end date
"2021/12/20",//member start date
"2021/12/25",//member end date
"Zhang San",//Price clerk
"5.1",//In stock
"Delicatessen",//Category code
"http://www.baidu.com",//QR code
"state",//state
"Extension 1",
"Extension 2",
"Extension 3",
"Extension 4",
"Extension 5",
"Extension 6",
"Extension 7",
"Extended 8",
"Extension 9",
"Extension 10"
]
}
]
```

Response

```
{
```

```

"code": 0,
"message":"success",
"body":"121f5151fdffffds21cdf"
}

```

Note: The field properties in this example are fixed. In fact, product data field content and templates can be set freely.

4.2 System Integration Interface

Integrate eRetail3.1 into the customer system, and the customer system operates, binds, and unbinds... eRetail3.1. ESL continues to work in eRetail3.1.

ESL data push refresh: Customers push product data and refresh to the specified ESL. The system background will not save user data.

◆ HTTP POST

URL: [http:// 192.168.1.92:5000/api/esl/tag/push](http://192.168.1.92:5000/api/esl/tag/push)

Content-Type: application/json

◆ Request parameters:

Parameter Name	Type	Describe
shopCode	string	Store number
tagID	string	ESL ID
ap	string	Send from designated base station(Default empty)
item	Object	Data entity
GoodsCode	string	Product unique code
GoodsName	string	Product name
Template	string	Template name
Items	Array	Data details array (Fields are used to bind to template display)

◆ Return format:

Parameter Name	Type	Describe
code	Int	0: success, other: error
message	String	success or error message
body	String	Default is empty

◆ Example:

Request

```
{  
    "shopCode": "0002",  
    "tagID": "4F000001320A",  
    "ap": "",  
    "item": {  
        "GoodsCode": "123456",  
        "GoodsName": "Obatley Castle Dry Red",  
        "Template": "SAL",  
        "Items": [  
            "0002", //Store number  
            "123456", //Product code: Unique product code  
            "Obatley Castle Dry Red", //product name  
            "Castle Dry Red", //Product abbreviation  
            "123456789012", //UPC1  
            "123456789013", // UPC2  
            "123456789014", // UPC3  
            "118.98", //REG price  
            "110.95", //Sale price  
            "118.96", //Member price  
            "118.96", //Original price  
            "Shanghai", //Origin  
            "300ml", //Specification  
            "qualified", //Grade  
            "bottle", //Unit  
            "2021/12/20", //Promotion start date  
            "2021/12/25", //Promotion end date  
            "2021/12/20", //Member start date  
            "2021/12/25", //Member end date  
            "Zhang San", //Price clerk  
            "50", //In stock  
            "Liquor", //Category code  
            "http://www.baidu.com", //QR code  
            "state",  
            "Extension 1",  
        ]  
    }  
}
```

```
"Extension 2",
"Extension 3",
"Extension 4",
"Extension 5",
"Extended 6",
"Extension 7",
"Extended 8",
"Extension 9",
"Extension 10"

]

}
```

Response

```
{  
  "code": 0,  
  "message": "success",  
  "body": ""  
}
```

Other interfaces: Refer to Sertag eRetail3.1 System Integration Manual.

5. No Docking

Data Sync option is turned off

Data structure: The following field information is used by default and can be modified or added.

```
Store Number
Goods code
Goods Name
Product Abbreviation
UPC1
UPC2
UPC3
```

REG price
SAL price
Member price
Original price
Origin
Specification
Grade
Unit
Promotion start date
Promotion end date
Member start date
Member end date
Price clerk
Inventory
Category code
QR code
Status
Extension 1
Extension 2
Extension 3
Extension 4
Extension 5
Extension 6
Extension 7
Extension 8
Extension 9
Extension 10

5.1 Product Data Maintenance

Store	Goods Name	Goods Code	Template	UPC	shopcode	GoodsCode	GoodsName	UPC1	Original price	Current price	Price3	Origin
0001	Dandong Cream Strawberry	0120231116	REG	0120231116	0001	0120231116	Dandong Cream St rawberry		6.99	3.99		Dandong
0001	123	0120231101	TEST	0120231101	0001	0120231101	123					
0001	New Zealand cheese	0220231017	P2	0220231017	0001	0220231017	New Zeal and chee se		9.99	9.99		
0001	Banana	0120231017	P1	0120231017	0001	0120231017	Banana		9.8	9.8		
0001	KRIS TEST	0120231012	kris	0120231012	0001	0120231012	KRIS TE ST					
0001	阳光鲜	0220231010	TEST	0220231010	0001	0220231010	阳光鲜		16.9 元/kg	12.9		

- Product data is maintained in [eRetail3.1-Data Management-Product management]
- Download the data structure form, fill in the product information in the form, and then import the form into the system to implement batch import and modification of product data.
- Add and modify individual products through the add and modify buttons.