



Reclaim Conveyor Chain

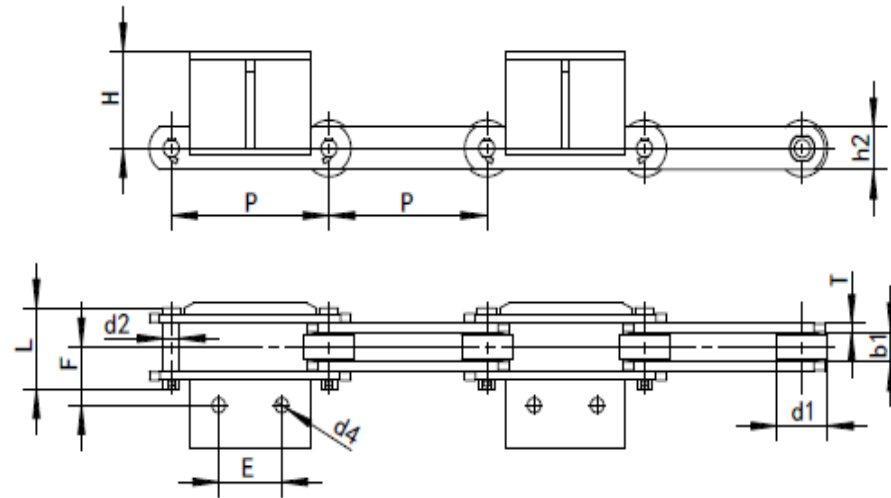

ZMIE Chain No.	Pitch	Width between inner plates	Roller diameter	Pin diameter	Pin length	Plate depth	Plate thickness	Dimensions				Ultimate tensile strength
	P	b1 min	d1 max	d2 max	L max	h2 max	T max	H	d4	E	F	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN
P250A	250.0	46.0	95.0	25.0	115.0	72.0	12	136.0	26.0	100.0	106.0	670.0
P250B	250.0	42.0	80.0	24.0	112.0	60.0	12	150.0	21.0	100.0	83.0	520.0
P250C	250.0	55.8	120.0	34.0	135.0	90.0	14	120.0	22.0	120.0	88.5	725.0
P250D	250.0	50.0	90.0	30.0	127.0	75.0	14	131.5	26.0	100.0	98.5	750.0
P315A	315.0	50.0	120.0	36.0	127.0	80.0	12	136.0	21.0	130.0	89.5	610.0

Apron Chain

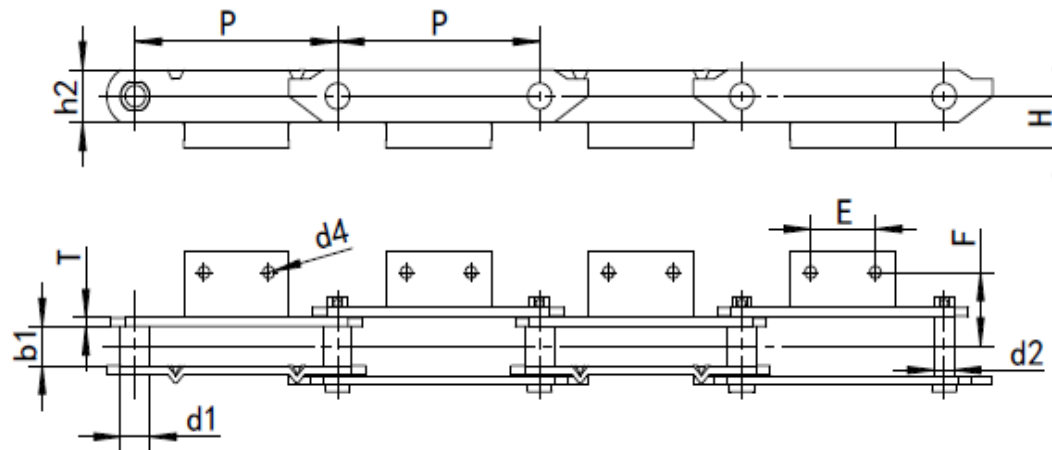

ZMIE Chain No.	Pitch	Inner depth	Bush diameter	Pin diameter	Plate depth	Plate thickness	Dimensions				Ultimate tensile strength
	P	b1 min	d1 max	d2 max	h2 max	T max	H	d4	E	F	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN
P250-250	250.0	40.0	32.0	20.0	60.0	8.0	60	14.0	80.0	70.0	250.0
P250-350	250.0	45.0	36.0	25.0	65.0	10.0	60	14.0	80.0	85.0	350.0
P250-400	250.0	45.0	40.0	26.0	70.0	10.0	70	14.0	80.0	85.0	400.0
P250-450	250.0	50.0	42.0	30.0	70.0	10.0	70	14.0	80.0	85.0	450.0
P250-500	250.0	60.0	44.0	30.0	80.0	10.0	70	16.0	85.0	90.0	500.0
P250-650	250.0	60.0	44.0	30.0	80.0	12.7	70	16.0	85.0	90.0	650.0
P250-850	250.0	60.0	54.0	36.0	90.0	12.7	60	16.0	85.0	90.0	850.0