



UDA

### Load cell UDA

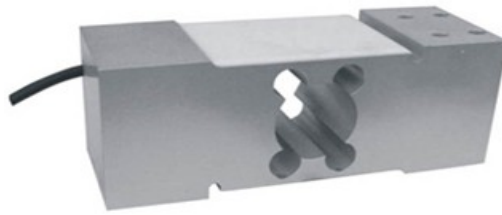

- ◆ Name: Load cell
- ◆ Modl: UDA
- ◆ UDA load cells are available in the capacities 50kg to 800kg.
- ◆ Alumium constructionm with parallel beam.
- ◆ Silicon adhesive sealed, surface anodized and anti-corrosion.
- ◆ Intergral structure and easy installation.
- ◆ Suitable for pricing scales, platform scales and other electronic weighing devices.
- ◆ Capacit:50kg to 800kg .
- ◆ High accuracy.
- ◆ Max. platform size: 400x500mm (50-350kg); 500x600mm(500kg-800kg)
- ◆ With OIML approval.

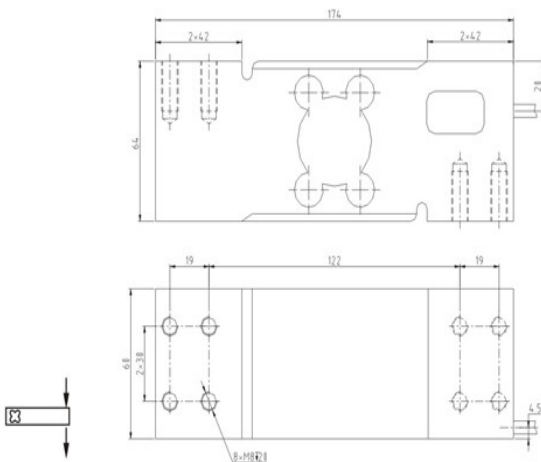

额定载荷 Rated Load	100,150,200,300,500,800kg	工作温度范围 Operating Temp Range	-20~50°C
灵敏度 Sensitivity	2.0±0.2mV/V	安全过载 Safe load limit	150%F.S
综合误差 Total error	C3	极限过载 Over load limit	300%F.S
蠕变 (30分钟) Creep(30min)	166ppin	推荐激励电压 Recommend excitation	10DC
零点平衡 Zero balance	±3%Emax	最大激励电压 Maximumu excitation	15V DC
零点温度影响 TCO	175ppin/°C	密封等级 Protection Class	IP65
输出温度影响 TC SPAN	15ppin/°C	材质 Construction	铝合金Aluminium
输入阻抗 Input resistance	404±15Ω	电缆 Cable	
输出阻抗 Output resistance	350±3Ω	Length:1m	
绝缘电阻 Insulation resistance	≥2000 MΩ	Diameter: φ 5mm	

**HANGZHOU GONGHENG WEIGHING EQUIPMENT CO.,LTD**

[www.hzgh-scales.com](http://www.hzgh-scales.com)

hzghscale@yahoo.com