


UniOP eTOP50

The eTOP50 is a state-of-the-art HMI device with a touch screen interface and a 15" graphic display. The novel aluminum bezel offers a rugged and convenient flat design and an appealing look.

Highlights

- 15" diagonal graphic display
- TFT Color display
- XVGA (1024x768 pixels) resolution
- Shows up to 48 rows, 128 characters of information
- Resistive touch screen
- Connection to industrial bus systems
- Connection to Ethernet
- Compatible with HMIcontrol and local I/O subsystems
- Large memory size (8 MB Flash)
- IP65 front panel protection
- Programmable with UniOP Designer version 5.08

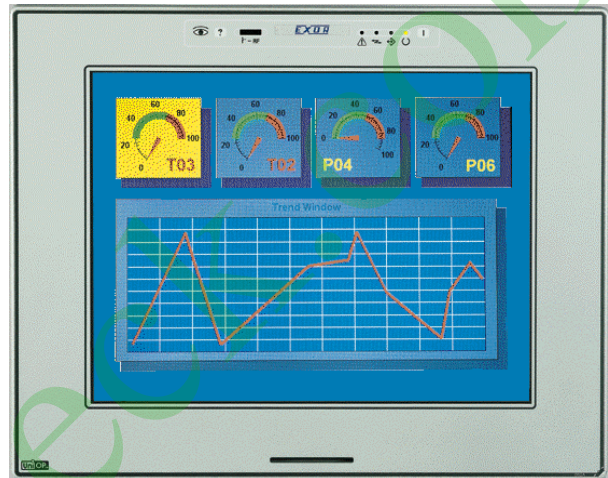

The eTOP HMI panels are part of the eTOUCH family of touch screen products. All of the eTOUCH products support the rich common functionality of the UniOP operator panels:

- Powerful and intuitive programming with the UniOP Designer software
- Support of more than 130 communication drivers for industrial devices
- Optional modules for fieldbus systems (Profibus DP, DeviceNet, Interbus, CANopen) and Ethernet
- Display data in numerical, text and bargraph format
- Dynamic graphic objects
- Data acquisition and trend presentation
- Analog gauges
- Recipe data storage
- Keyboard/Touch macro editor
- Alarms and historical alarm list
- Eight level password protection
- Report printing to serial printer


Technical data

eTOP50	Display	Colors	Backlight	Lifetime
	TFT color LCD	256	CCFL	
Display				
Graphic resolution	1024x768 pixels			
Active display area	304.1x228.1 mm (15" diagonal)			
Rows/columns	48x128			
Character height	-			
Scalable fonts	Yes			
User definable characters	256			
Contrast regulation	-			
Memory				
User memory	8 MB SSFDC memory card			
User memory expansion	-			
Front panel				
Function keys	-			
System keys	-			
Touch screen	Resistive (guaranteed 3 M operations)			
User LED's	-			
System LED's	5			
Connections				
PC/Printer port	Yes			
PLC port	RS-232, RS-485, RS-422, 20 mA CL			
Aux port (fieldbus and Ethernet connection)	Yes, with optional modules			
External keyboard port	No			
Programming speed	9600 - 38400 bps			
Functionality				
Page size	-			
Number of variables per page	Unlimited			
Recipe memory	32 KB			
UniNet network	Client/Server			
Alarms	1024			
Event list	1024			
Alarm info page	Yes			
Password	Yes			
Battery	Yes			
Hardware RTC	Yes, battery backed			
Screen saver	Yes			
Buzzer	Yes, audible feedback for touch screen			
Power supply voltage	18 - 30 VDC			
Max power consumption	~ 1200 mA at 24 VDC			
Fuse	Automatic			


Weight	~ 3.85 Kg
Operating temperature	0 to 45 °C
Storage temperature	-20 to +70 °C
Operating and storage humidity	5 – 95 % RH non-condensing
Protection class	IP65 (front panel)

Front dimensions and cutout

Faceplate LxH	392x307 mm	15.43x12.08"
Cutout AxH	381x296 mm	15.00x11.65"
Cutout depth (version -0050)	101 mm	3.98"
Max panel thickness	5 mm	0.2"

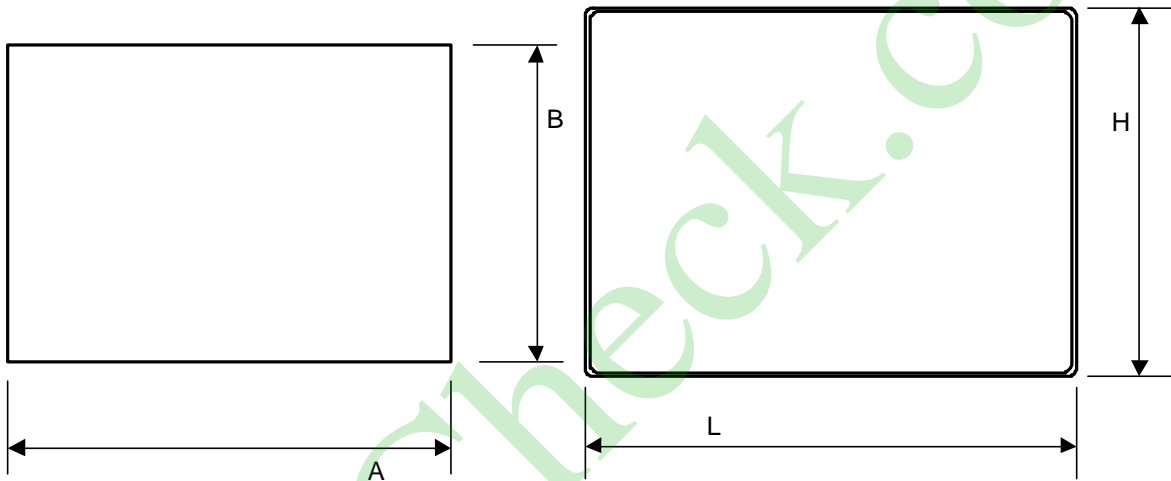

Connections

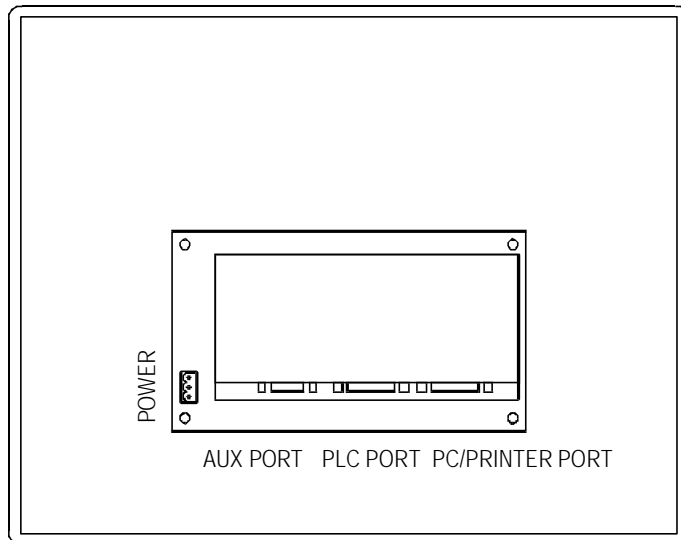

Indicators on the front panel

There are several dedicated LED indicators on the front panel of the unit. Functions are described in the table below.

A customizable legend strip is included.



Elements not listed in the table are reserved for future use.

LED	Color	Status	Meaning
	red	OFF	No hardware problem detected
		BLINK	Battery low
		ON	Hardware fault
	green	OFF	No touch cell active
		ON	While any touch cell is active (visual feedback)
	green	OFF	Hardware fault
		ON	Unit in operation
	green	BLINK	Communication error
		ON	Communication OK
	red	OFF	No alarms
		BLINK	Alarm requires acknowledgment
		ON	Alarm active