

TEST REPORT

Product Name: Automatic soap dispenser

Trademark: **HUIGOJO®**
惠高洁

Ses11

Model Number: Ses12, Ses13, Ses14, Ses15, Ses23, Ses24, Ses25, Ses21, Ses22, Ses01, Ses02, Ses03, Ses04, Ses05, Ses06

Prepared For: Shenzhen Smarlean Hygiene Co., Ltd

Address: Building No.13, Tan Luo Road, Da Lang Street, Long Hua District, Shen Zhen City, China

Manufacturer: Shenzhen Smarlean Hygiene Co., Ltd

Address: Building No.13, Tan Luo Road, Da Lang Street, Long Hua District, Shen Zhen City, China

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

Sample Received Date: Mar. 03, 2020

Sample tested Date: Mar. 03, 2020 to Mar. 26, 2020

Issue Date: Mar. 30, 2020

Report No.: BCTC2003000086E

Test Standards EN 55014-1:2017, EN 55014-2:2015

Test Results PASS

Compiled by:

Blake Cai
Blake Cai

Reviewed by:

Eric Yang
Eric Yang

Approved by:

Zero Zhou/Manager
Zero Zhou/Manager



The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Test Mode	6
5. TEST FACILITY AND TEST INSTRUMENT USED	7
5.1 Test Facility	7
5.2 Test Instrument Used	7
6. RADIATED DISTURBANCE TEST	9
6.1 Block Diagram Of Test Setup	9
6.2 Limits	9
6.3 Test Procedure	9
6.4 Test Results	10
7. IMMUNITY TEST OF GENERAL THE PERFORMANCE CRITERIA	12
8. ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)	13
8.1 Test Specification	13
8.2 Block Diagram of Test Setup	13
8.3 Test Procedure	13
8.4 Test Results	14
9. RADIO FREQUENCY ELECTROMAGNETIC FIELDS (RS)	15
9.1 Test Specification	15
9.2 Block Diagram of Test Setup	15
9.3 Test Procedure	15
9.4 Test Results	15
10. EUT PHOTOGRAPHS	16
11. EUT TEST SETUP PHOTOGRAPHS	19

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
BCTC2003000086E	Mar.30, 2020	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

EMISSION		
Standard	Test Item	Test result
EN 55014-1	Disturbance voltages(CE)	N/A ⁴
EN 55014-1	Discontinuous disturbance (Clicks)	N/A ¹
EN 55014-1	Disturbance power(DP)	N/A ²
EN 55014-1	Magnetic field induced current in a 2m loop antenna(ME)	N/A ³
EN 55014-1	Magnetic field strength	N/A ³
EN 55014-1	Radiated disturbance (RE)	Pass

IMMUNITY (EN 55014-2)		
Standard	Test Item	Test result
IEC 61000-4-2	Electrostatic discharge immunity Test (ESD)	Pass
IEC 61000-4-3	Radio frequency electromagnetic fields(RS)	Pass
IEC 61000-4-4	Fast transients immunity Test (EFT)	N/A ⁴
IEC 61000-4-5	Surges immunity Test	N/A ⁴
IEC 61000-4-6	Injected currents immunity Test (CS)	N/A ⁴
IEC 61000-4-11	Voltage dips and interruptions immunity Test (DIPS)	N/A ⁴

Remark:

1. The Product has no switching operations, automatic programme or other electrically controlled or operated functions
2. The Product shall be evaluated for emissions in the 30 MHz to 1 000 MHz range by testing in accordance with method b as described in clause 4.3.4.2 of EN55014-1.
3. It only apply to induction cooking appliances.
4. The EUT is powered by the DC only, the test item is not applicable.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Test item	Value (dB)
Disturbance voltages (150K-30MHZ)	3.20
Disturbance power(DP)	3.70
Radiated disturbance (30MHz-1000MHz)	4.80

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Ratings: DC 6V

Model difference: All models are identical except for the appearance color, the test model is D2032 and the test results are applicable to other tests.

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	---	---	---	---	---	---

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Test Mode

Test item	Test Mode	Test Voltage
Radiated disturbance(30MHz-1GHz)	Working	DC 6V *
Electrostatic discharge (ESD) B <input checked="" type="checkbox"/> Air Discharge: $\pm 8\text{kV}$ <input checked="" type="checkbox"/> Contact Discharge: $\pm 4\text{kV}$ <input checked="" type="checkbox"/> HCP & VCP: $\pm 4\text{kV}$	Working	DC 6V
Radio frequency electromagnetic fields(RS) A 80MHz-1000MHz, 3V/m,80% Front, Rear, Left, Right H/V	Working	DC 6V
All test mode were tested and passed, only Radiated disturbance shows (*) is the worst case mode which were recorded in this report.		

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used


Radiated disturbance Test (966 chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 19, 2018	Jun. 18, 2021
Receiver	R&S	ESR3	102075	Jun. 13, 2019	Jun. 12, 2020
Receiver	R&S	ESRP	101154	Jun. 13, 2019	Jun. 12, 2020
Amplifier	Schwarzbeck	BBV9718	9718-309	Jun. 25, 2019	Jun. 24, 2020
Amplifier	Schwarzbeck	BBV9744	9744-0037	Jun. 25, 2019	Jun. 24, 2020
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	VULB9163-942	Jun. 22, 2019	Jun. 21, 2020
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Electrostatic discharge immunity Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
ESD Tester	KIKISUI	KES4201A	UH002321	Jul. 12, 2019	Jul. 10, 2020

Radio frequency electromagnetic fieldsTest					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419	GB42421440	Jun. 17, 2019	Jun. 16, 2020
Power sensor	Keysight	E9300A	US39211305	Jun. 17, 2019	Jun. 16, 2020
Power sensor	Keysight	E9300A	US39211659	Jun. 17, 2019	Jun. 16, 2020
Amplifier	SKET	HAP-8010 00M-250W	\	Jun. 25, 2019	Jun. 24, 2020
Amplifier	SKET	HAP-8010 00M-75W	\	Jun. 25, 2019	Jun. 24, 2020
Amplifier	SKET	HAP-8010 00M-50W	\	Jun. 25, 2019	Jun. 24, 2020
Stacked double Log.-Per. Antenna	Schwarzbeck	STLP 9129	077	\	\
Field Probe	Narda	EP-601	80256	Jul. 07, 2019	Jul. 06, 2020
Signal Generator	Agilent	N5181A	MY50143748	Jun. 13, 2019	Jun. 12, 2020
Software	SKET	EMC-S	1.2.0.18	\	\

6. RADIATED DISTURBANCE TEST

6.1 Block Diagram Of Test Setup

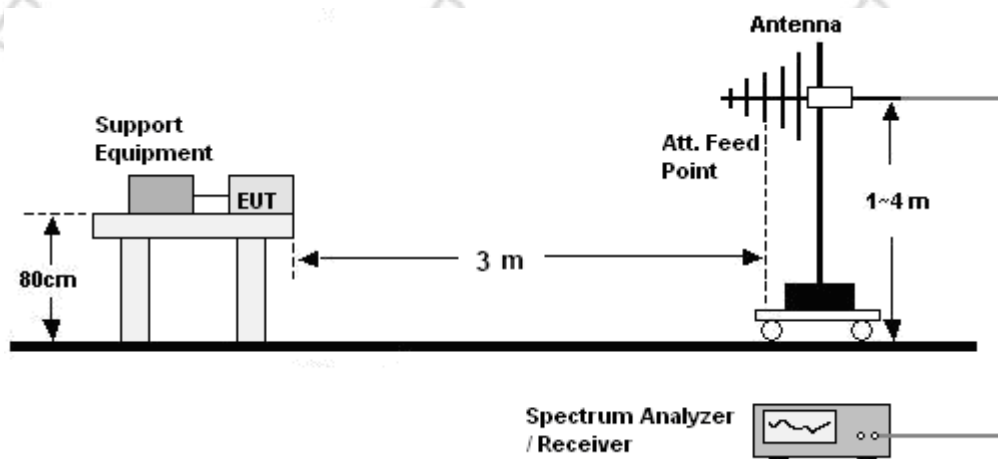

6.2 Limits

Frequency (MHz)	Quasi-peak limits at 3m dB(μ V/m)
30-230	40
230-1000	47


Note: The lower limit shall apply at the transition frequencies.

6.3 Test Procedure

- The Product was placed on the nonconductive turntable 0.8 m above the ground at a chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.


6.4 Test Results

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Horizontal
Test Voltage :	DC 6V	Test Mode:	Working

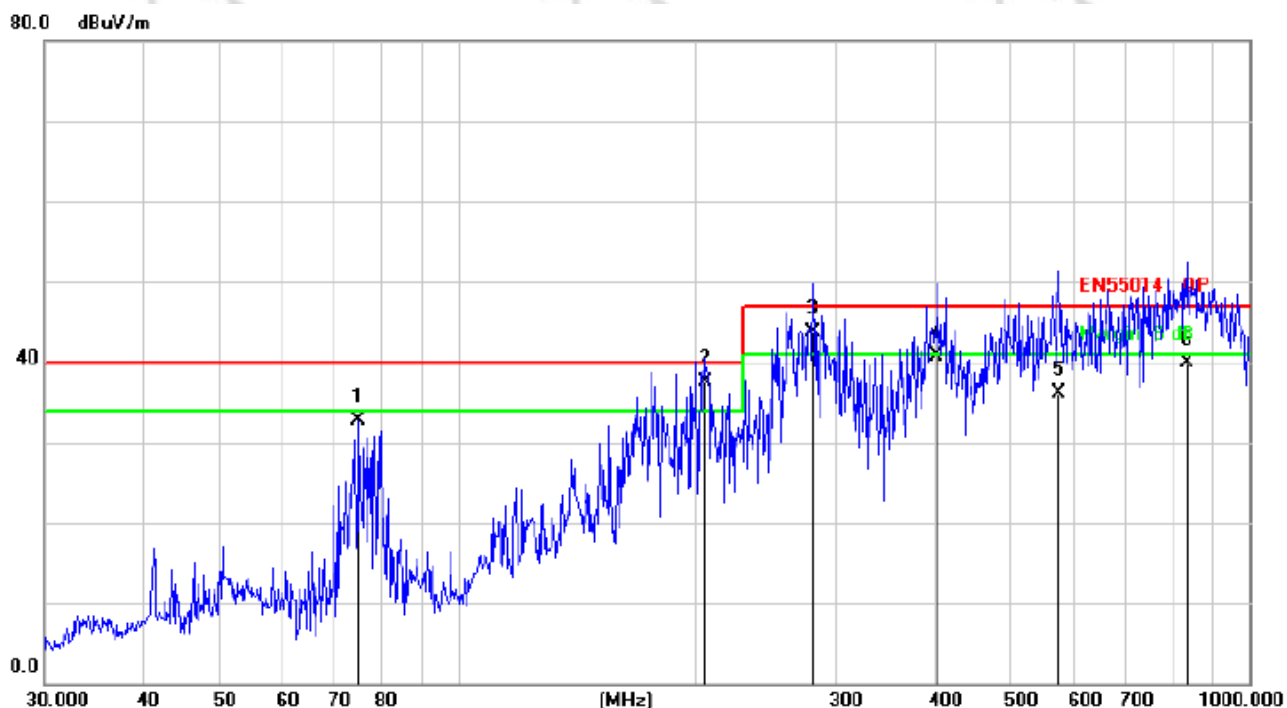

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		74.9191	52.05	-19.28	32.77	40.00	-7.23	QP
2	*	204.9550	53.68	-16.19	37.49	40.00	-2.51	QP
3	!	281.0074	57.96	-14.19	43.77	47.00	-3.23	QP
4		403.2500	51.74	-11.02	40.72	47.00	-6.28	QP
5		574.6258	43.27	-7.11	36.16	47.00	-10.84	QP
6		834.3161	42.84	-2.87	39.97	47.00	-7.03	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Vertical
Test Voltage :	DC 6V	Test Mode:	Working

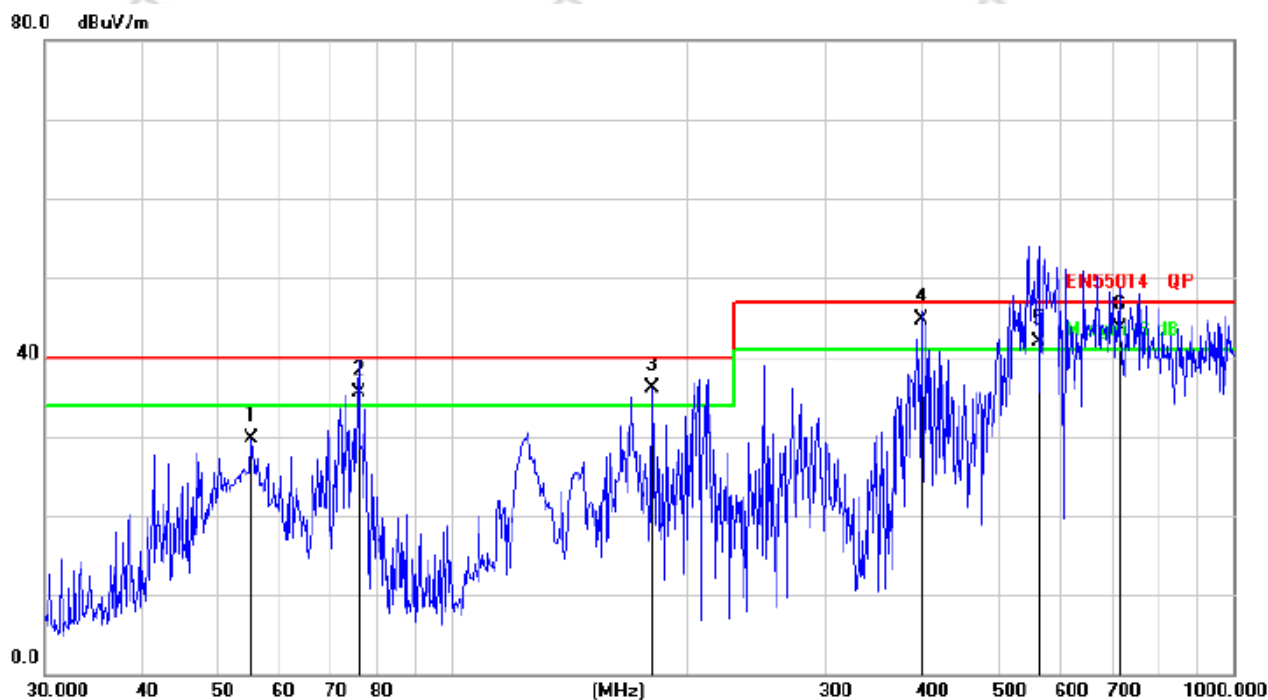

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		55.2207	45.03	-15.40	29.63	40.00	-10.37	QP
2	!	75.7114	55.00	-19.46	35.54	40.00	-4.46	QP
3	!	180.0165	53.71	-17.58	36.13	40.00	-3.87	QP
4	*	399.0300	55.81	-11.11	44.70	47.00	-2.30	QP
5	!	564.4204	49.25	-7.35	41.90	47.00	-5.10	QP
6	!	714.1734	48.62	-4.91	43.71	47.00	-3.29	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

7. IMMUNITY TEST OF GENERAL THE PERFORMANCE CRITERIA


Product Standard	EN 55014-2:2015
CRITERION A	The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended
CRITERION B	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.
CRITERION C	Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

8. ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

8.1 Test Specification

Test Port	: Enclosure port
Discharge Impedance	: 330 ohm / 150 pF
Discharge Mode	: Single Discharge
Discharge Period	: one second between each discharge

8.2 Block Diagram of Test Setup

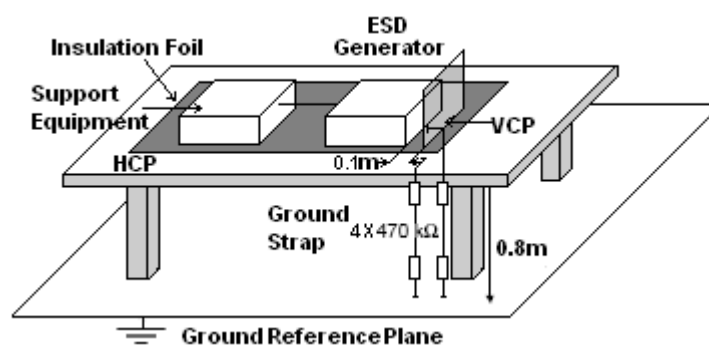

8.3 Test Procedure

- Electrostatic discharges were applied only to those points and surfaces of the Product that are accessible to users during normal operation.
- The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- The time interval between two successive single discharges was at least 1 second.
- The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the Product.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge electrode approaching the Product as fast as possible (without causing mechanical damage) to touch the Product. After each discharge, the ESD generator was removed from the Product and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- At least ten single discharges (in the most sensitive polarity) were applied to the Horizontal Coupling Plane at points on each side of the Product. The ESD generator was positioned vertically at a distance of 0.1 meters from the Product with the discharge electrode touching the HCP.

h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the Product were completely illuminated. The VCP (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the Product.

8.4 Test Results

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Mode:	Working
Test Voltage :	DC 6V		


Discharge Method	Discharge Position	Voltage (±kV)	Min. No. of Discharge per polarity (Each Point)	Required Level	Performance Criterion
Contact Discharge	Conductive Surfaces	4	10	B	A
	Indirect Discharge HCP	4	10	B	A
	Indirect Discharge VCP	4	10	B	A
Air Discharge	Slots, Apertures, and Insulating Surfaces	8	10	B	A
Note: N/A					

9. RADIO FREQUENCY ELECTROMAGNETIC FIELDS (RS)

9.1 Test Specification

Test Port	: Enclosure port
Step Size	: 1%
Modulation	: 1kHz, 80% AM
Dwell Time	: 1 second
Polarization	: Horizontal & Vertical

9.2 Block Diagram of Test Setup

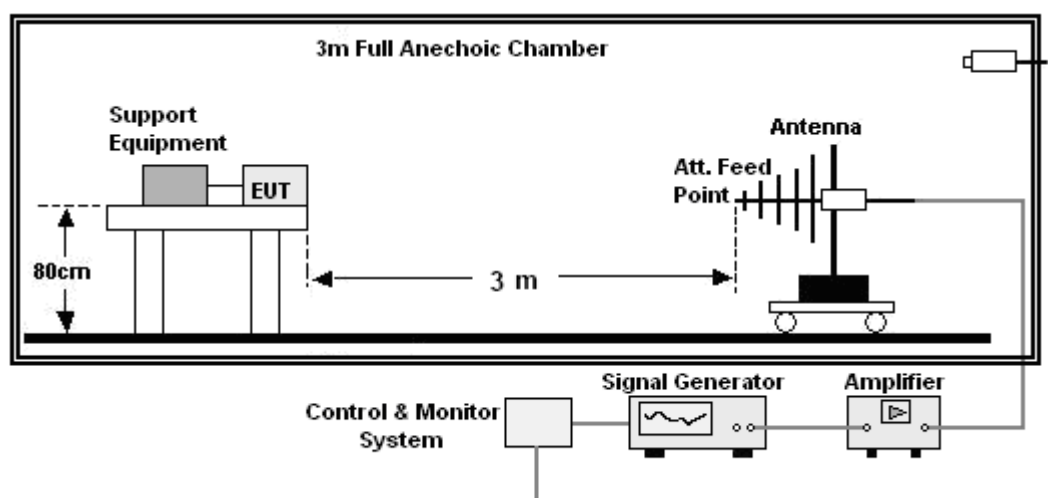

9.3 Test Procedure

- The testing was performed in a fully-anechoic chamber. The transmit antenna was located at a distance of 3 meters from the Product.
- The frequency range is swept from 80MHz to 1000MHz, with the signal 80% amplitude modulated with a 1 kHz sine wave, and the step size was 1%.
- The test was performed with the Product exposed to both vertically and horizontally polarized fields on each of the four sides.

9.4 Test Results

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Mode:	Working
Test Voltage :	DC 6V		

Frequency	Position	Field Strength (V/m)	Required Level	Performance Criterion
80 - 1000MHz	Front, Right, Back, Left	3	A	A
Note: N/A				

10. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2




EUT Photo 3



EUT Photo 4



EUT Photo 5

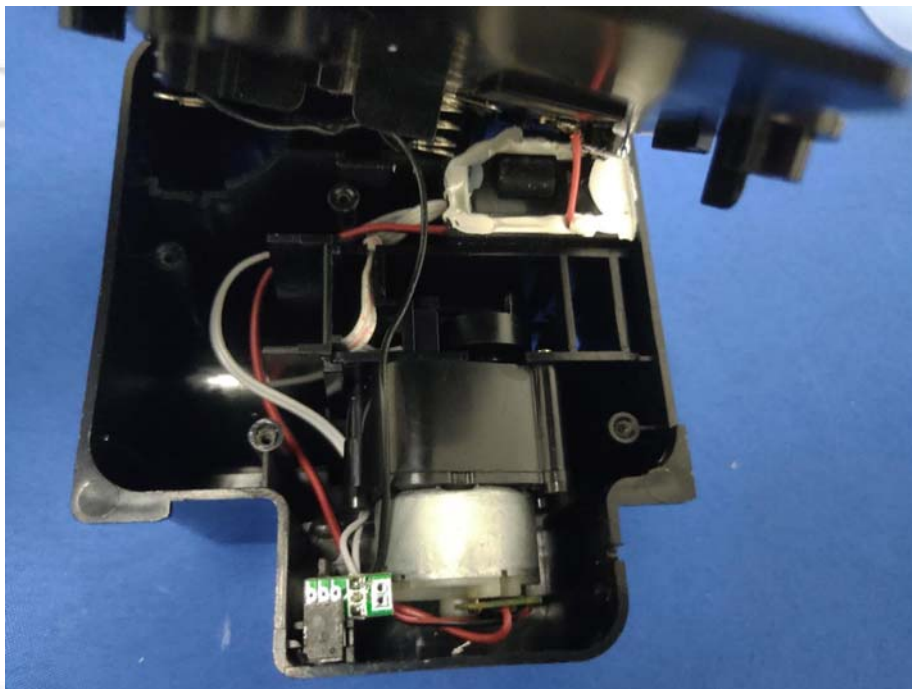

11. EUT TEST SETUP PHOTOGRAPHS


Radiated disturbance



ESD



RS

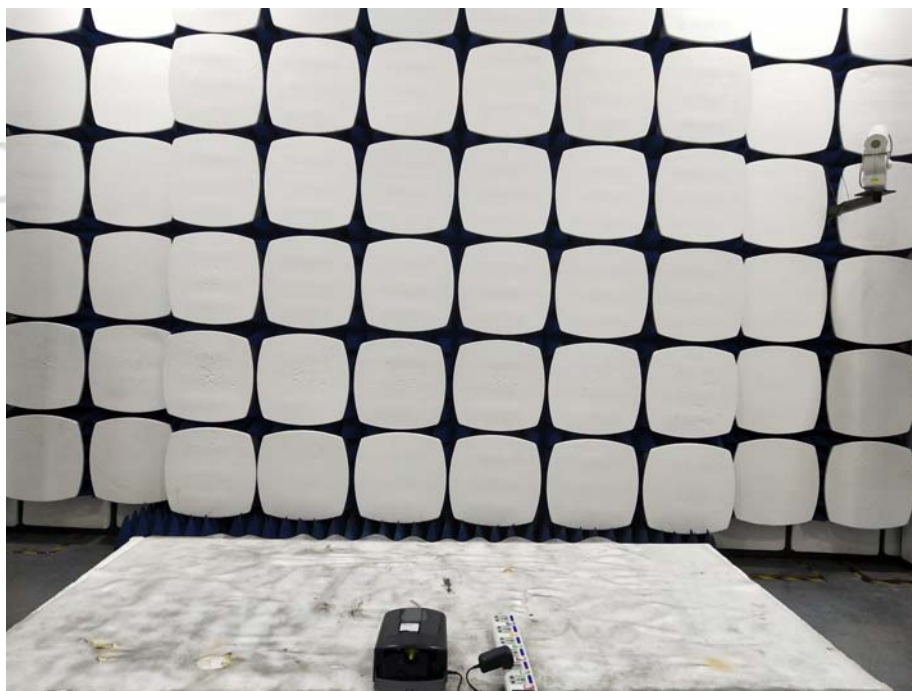

***** END OF REPORT *****